

11 Series Datasheet

Product: 11 Series

Version: A0


Description
Structure
Technical data
How to use
Storage condition

Description


This splice tape is used for jointing carrier tapes in the SMT process, It is made of PET,yellow tapes and release paper, and the tape is made by our produced patent material with superior adhesion.

P/N	Size	carrier tape	Qty/box
SMS1104C	2.5x396mm	4mm	500pcs/box
SMS1108C	5x396mm	8mm	500pcs/box
SMS1112C	7x396mm	12mm	500pcs/box
SMS1116C	9x396mm	16mm	500pcs/box
SMS1124C	18x396mm	24mm	250pcs/box
SMS1132C	25x396mm	32mm	250pcs/box

Picture:

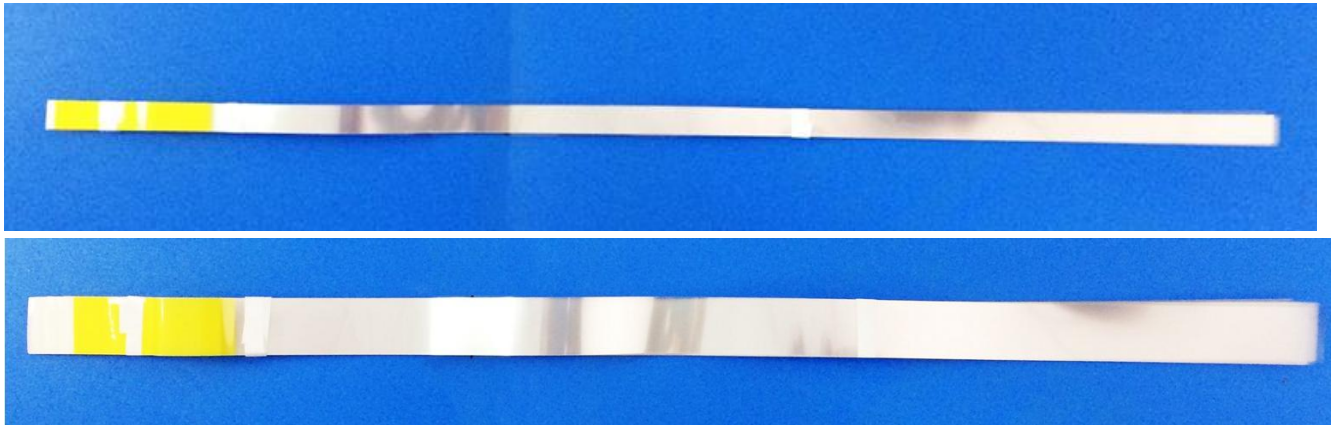

Structure

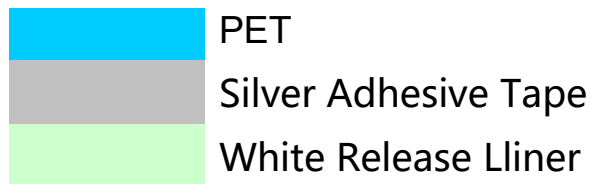

Technical Data

No	Item	Test Data	Remark
1	Peeling-off force (N/25mm) by angle of 180 degree	≥ 15	
2	Retaining (H/25*25mm) Hours	> 100	
3	Tensile strength at break (N/25mm) PET Part	> 8	

Storage Condition:

Temperature: 20°C-30°C

Relative Humidity(RH): 45%-65%

Shelf-life: One year