


FEATURES:

1. DISPLAY MODE: STN BLUE, TRANSMISSIVE, NEGATIVE
2. VIEW ANGLE: 6:00
3. OPERATING VOLTAGE: 5.0V
4. OPERATING TEMP: -20°C ~ 70°C
5. STORAGE TEMP: -30°C ~ 80°C
6. BACKLIGHT: LED (WHITE), Vbk=5.0V
7. DRIVER: ST7066U-0A OR EQUIVALENT

PIN	1	2	3	4	5	6	7	8
SIGNAL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
SIGNAL	DB2	DB3	DB4	DB5	DB6	DB7	A	K

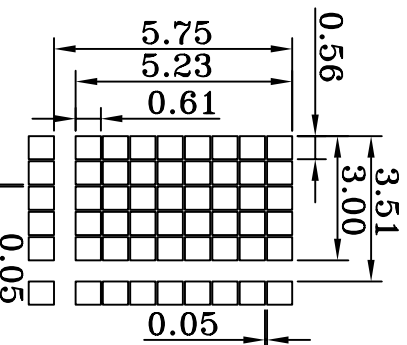

CENTER OF BZL
TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



料:

绘图: 林文

绘图编号: PCMI602B-NSW-BBW-01

单位: mm

审核:

客户编号: PCMI602B-NSW-BBW-01

日期: 2010.09.21

批准:

图纸版本号: V1.0

页数: 1/1