

### Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- High input voltage (up to 24V)
- High output current : 100mA
- Output voltage accuracy: tolerance  $\pm 3\%$
- TO92, SOT89 and SOT23 5 package

### Applications

- Battery powered equipment
- Communication equipment
- Audio/Video equipment

### General Description

The HT75xx 1 series is a set of three terminal high current low voltage regulator implemented in CMOS technology. They can deliver 100mA output current and allow an input voltage as high as 24V. They are available with several fixed output voltages ranging from

2.1V to 12.0V. CMOS technology ensures low voltage drop and low quiescent current.

Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.

### Selection Table

Part No.	Output Voltage	Package	Marking
HT7521 1	2.1V	TO92 SOT89 SOT23 5	75xx 1 (for TO92) 75xx 1 (for SOT89) 75xx 1# (for SOT89) 75xx 1+ (for SOT89) 5xx1 (for SOT23 5) 5xx1# (for SOT23 5) 5xx1+ (for SOT23 5)
HT7523 1	2.3V		
HT7525 1	2.5V		
HT7527 1	2.7V		
HT7530 1	3.0V		
HT7533 1	3.3V		
HT7536 1	3.6V		
HT7540 1	4.0V		
HT7544 1	4.4V		
HT7550 1	5.0V		
HT7560 1	6.0V		
HT7570 1	7.0V		
HT7580 1	8.0V		
HT7590 1	9.0V		
HT75A0 1	10.0V		
HT75C0 1	12.0V		

Note: "xx" stands for output voltages.


Both lead free and green compound devices are available. Note the symbol marks below:

"#" stands for lead free devices.







Blank and "+" stands for green compound devices, which are Lead free and Halogen free.

For the TO92 package, the symbol mark will be at the end of the date code. Whereas for the SOT89 and SOT23 5, the symbol mark will be located at the end of IC marking.

**Block Diagram**

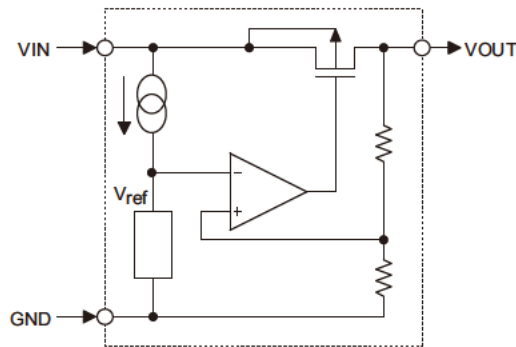

**Pin Assignment**



**Absolute Maximum Ratings**

Supply Voltage .....-0.3V to 26V      Storage Temperature .....-50°C to 125°C  
 Operating Temperature .....-40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

**Thermal Information**

Symbol	Parameter	Package	Max.	Unit
$\theta_{JA}$	Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink)	SOT23 5	500	°C/W
		SOT89	200	°C/W
		TO92	200	°C/W
$P_D$	Power Dissipation	SOT23 5	0.20	W
		SOT89	0.50	W
		TO92	0.50	W

Note:  $P_D$  is measured at  $T_a = 25^\circ\text{C}$

**Electrical Characteristics**
**HT7521-1, +2.1V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	4.1V	I <sub>OUT</sub> =10mA	2.037	2.1	2.163	V
I <sub>OUT</sub>	Output Current	4.1V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	4.1V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	4.1V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		3.1V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	4.1V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.37		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7523-1, +2.3V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	4.3V	I <sub>OUT</sub> =10mA	2.231	2.3	2.369	V
I <sub>OUT</sub>	Output Current	4.3V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	4.3V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	4.3V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		3.3V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	4.3V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.39		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7525-1, +2.5V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	4.5V	I <sub>OUT</sub> =10mA	2.425	2.5	2.575	V
I <sub>OUT</sub>	Output Current	4.5V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	4.5V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	4.5V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		3.5V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	4.5V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.41		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7527-1, +2.7V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	4.7V	I <sub>OUT</sub> =10mA	2.619	2.7	2.781	V
I <sub>OUT</sub>	Output Current	4.7V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	4.7V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	4.7V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		3.7V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	4.7V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.43		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7530-1, +3.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	5.0V	I <sub>OUT</sub> =10mA	2.91	3.0	3.09	V
I <sub>OUT</sub>	Output Current	5.0V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	5.0V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	5.0V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		4.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	5.0V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.45		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7533-1, +3.3V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	5.5V	I <sub>OUT</sub> =10mA	3.201	3.3	3.399	V
I <sub>OUT</sub>	Output Current	5.5V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	5.5V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	5.5V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		4.5V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	5.5V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.5		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7536-1, +3.6V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	5.6V	I <sub>OUT</sub> =10mA	3.492	3.6	3.708	V
I <sub>OUT</sub>	Output Current	5.6V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	5.6V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	5.6V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		4.6V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	5.6V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.6		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7540-1, +4.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	6.0V	I <sub>OUT</sub> =10mA	3.88	4.0	4.12	V
I <sub>OUT</sub>	Output Current	6.0V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	6.0V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	6.0V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		5.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	6.0V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.7		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7544-1, +4.4V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	6.4V	I <sub>OUT</sub> =10mA	4.268	4.4	4.532	V
I <sub>OUT</sub>	Output Current	6.4V		60	100		mA
ΔV <sub>OUT</sub>	Load Regulation	6.4V	1mA ≤ I <sub>OUT</sub> ≤ 50mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	6.4V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		5.4V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	6.4V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.7		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7550-1, +5.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	7.0V	I <sub>OUT</sub> =10mA	4.85	5.0	5.15	V
I <sub>OUT</sub>	Output Current	7.0V		100	150		mA
ΔV <sub>OUT</sub>	Load Regulation	7.0V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	7.0V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		6.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	7.0V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.75		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7560-1, +6.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	8.0V	I <sub>OUT</sub> =10mA	5.82	6.0	6.18	V
I <sub>OUT</sub>	Output Current	8.0V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	8.0V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	8.0V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		7.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	8.0V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.85		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7570-1, +7.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	9.0V	I <sub>OUT</sub> =10mA	6.79	7.0	7.21	V
I <sub>OUT</sub>	Output Current	9.0V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	9.0V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	9.0V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		8.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	9.0V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±0.95		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.



**HT7580-1, +8.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	10V	I <sub>OUT</sub> =10mA	7.76	8.0	8.24	V
I <sub>OUT</sub>	Output Current	10V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	10V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	10V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		9.0V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	10V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±1.10		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT7590-1, +9.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	11V	I <sub>OUT</sub> =10mA	8.73	9.0	9.27	V
I <sub>OUT</sub>	Output Current	11V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	11V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	11V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		10V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	11V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±1.15		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**HT75A0-1, +10.0V Output Type**

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	12V	I <sub>OUT</sub> =10mA	9.7	10.0	10.3	V
I <sub>OUT</sub>	Output Current	12V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	12V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	12V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		11V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	12V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±1.25		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.







**HT75C0-1, +12.0V Output Type**







Ta=25°C





Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>IN</sub>	Conditions				
V <sub>OUT</sub>	Output Voltage	14V	I <sub>OUT</sub> =10mA	11.64	12.0	12.36	V
I <sub>OUT</sub>	Output Current	14V		150			mA
ΔV <sub>OUT</sub>	Load Regulation	14V	1mA ≤ I <sub>OUT</sub> ≤ 70mA		60	150	mV
V <sub>DIF</sub>	Voltage Drop (Note)		I <sub>OUT</sub> =1mA, ΔV <sub>OUT</sub> =2%		100		mV
I <sub>SS</sub>	Current Consumption	14V	No load		2.5	5.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation		13V ≤ V <sub>IN</sub> ≤ 24V I <sub>OUT</sub> =1mA		0.2		%/V
V <sub>IN</sub>	Input Voltage					24	V
$\frac{\Delta V_{DET}}{\Delta T_a}$	Temperature Coefficient	14V	I <sub>OUT</sub> =10mA 40°C < T <sub>a</sub> < 85°C		±1.45		mV/°C

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V<sub>IN</sub> = V<sub>OUT</sub>+2V with a fixed load.

**Typical Performance Characteristics**

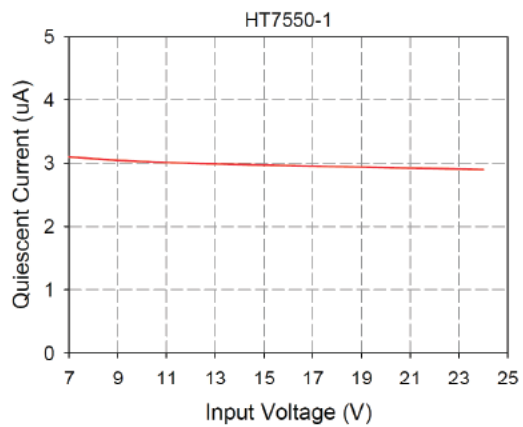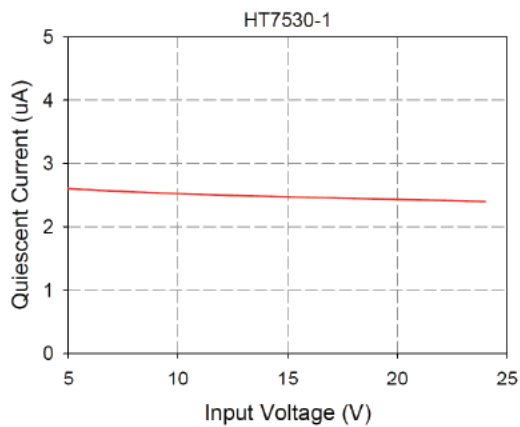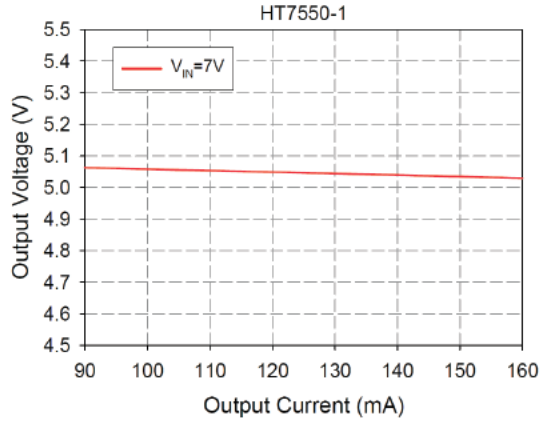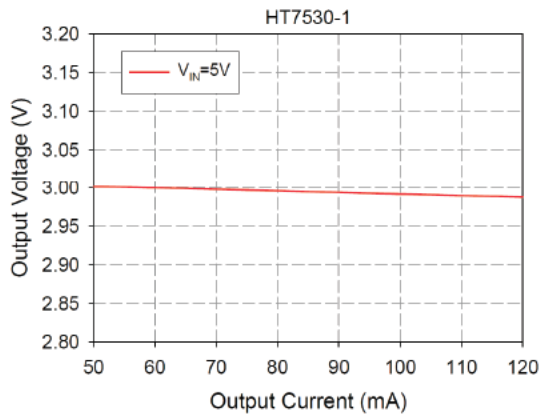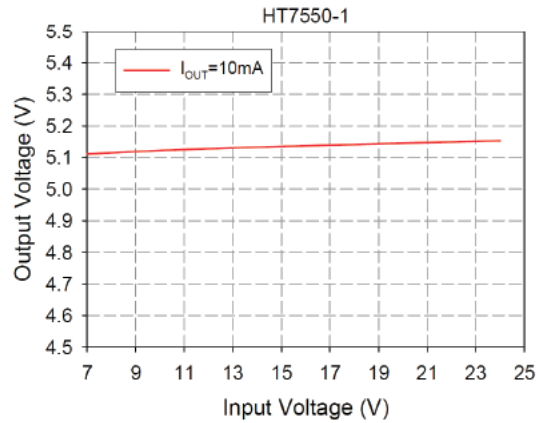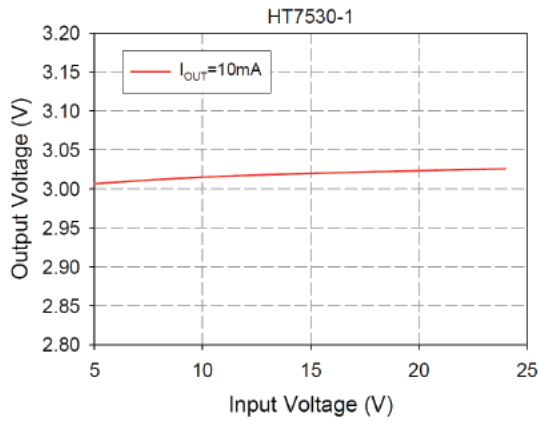


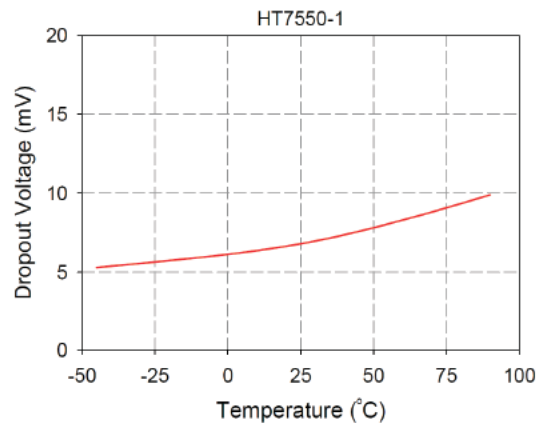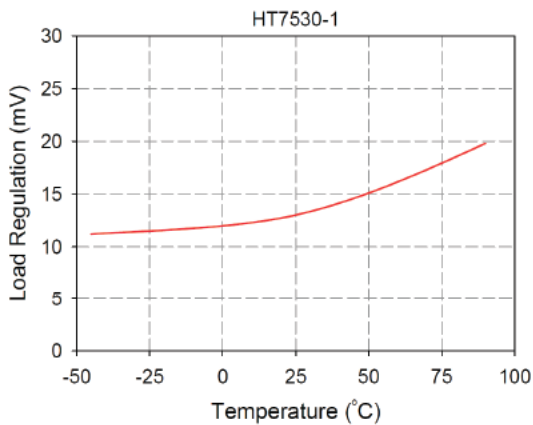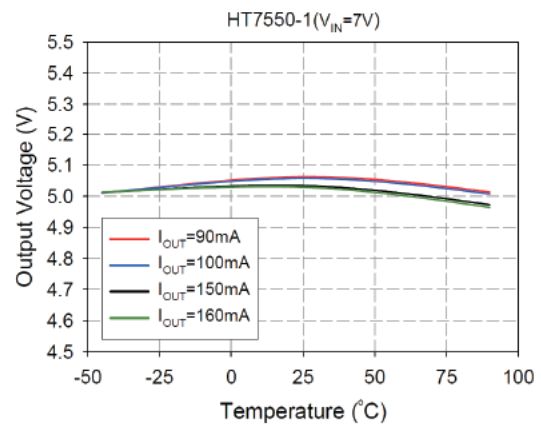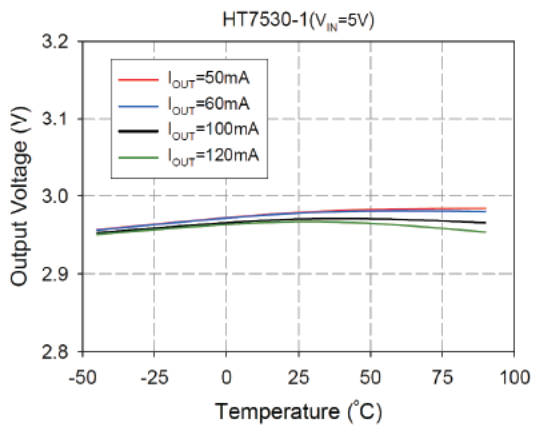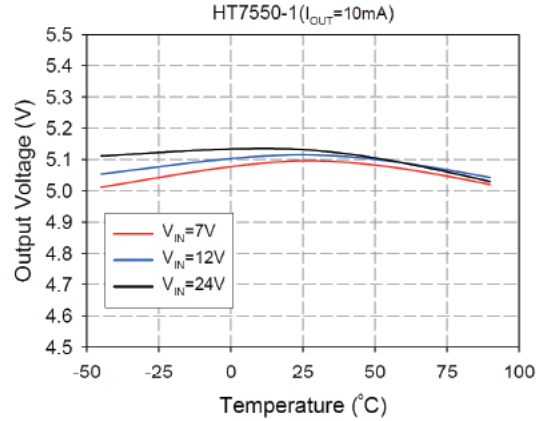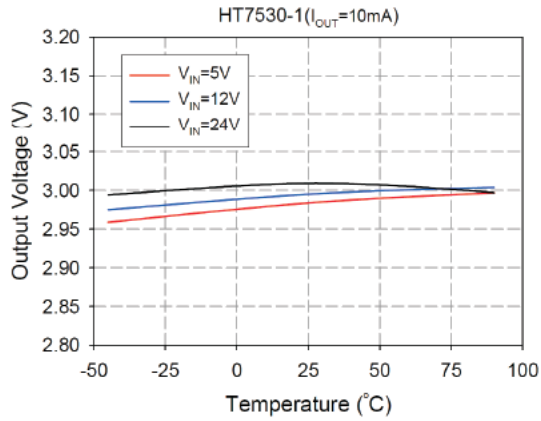

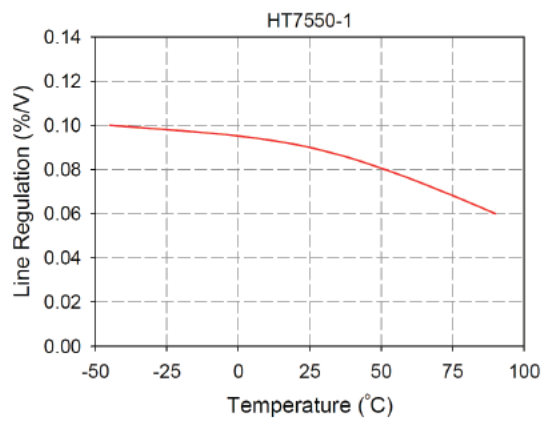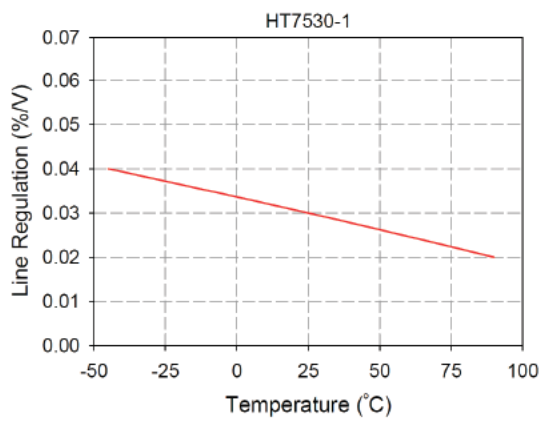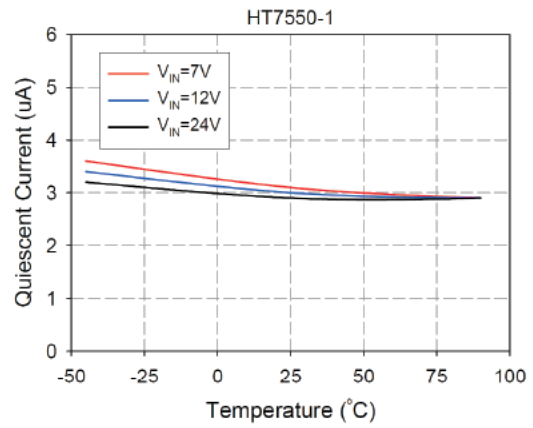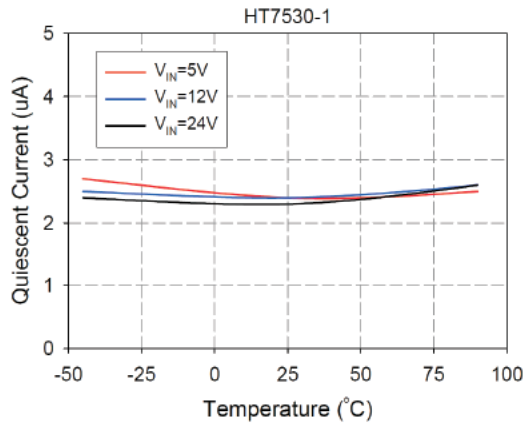


Application Circuits


Basic Circuit

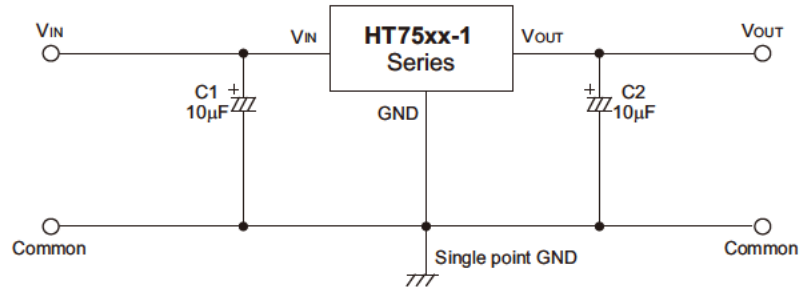


High Output Current Positive Voltage Regulator

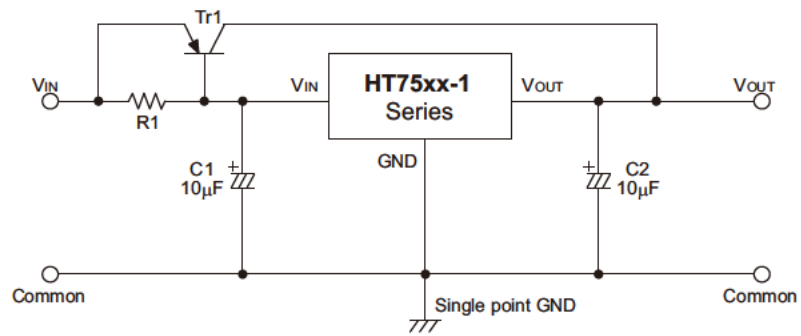

Short-Circuit Protection for Tr1

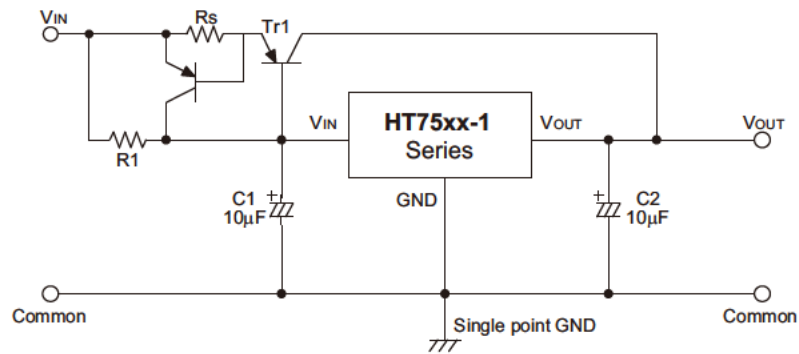


Circuit for Increasing Output Voltage

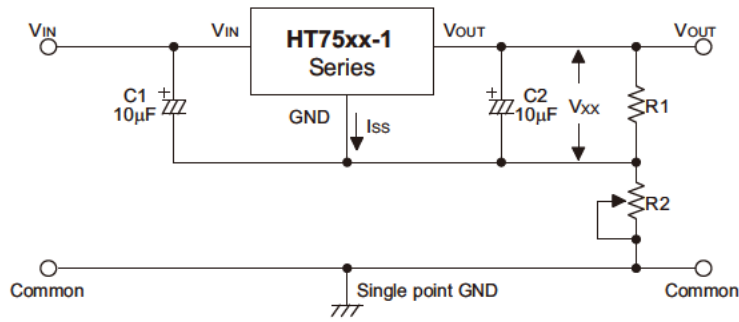


$$V_{OUT} = V_{xx} \left( 1 + \frac{R2}{R1} \right) + I_{SS} R2$$

Circuit for Increasing Output Voltage

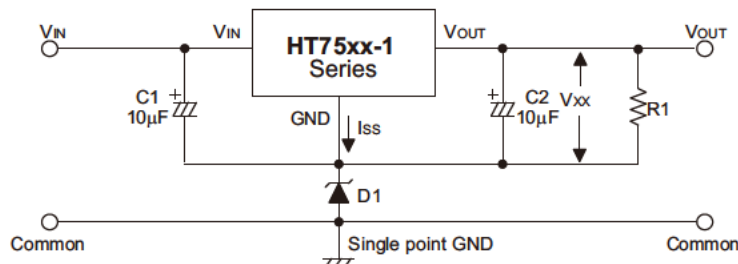


$$V_{OUT} = V_{xx} + V_{D1}$$

Constant Current Regulator

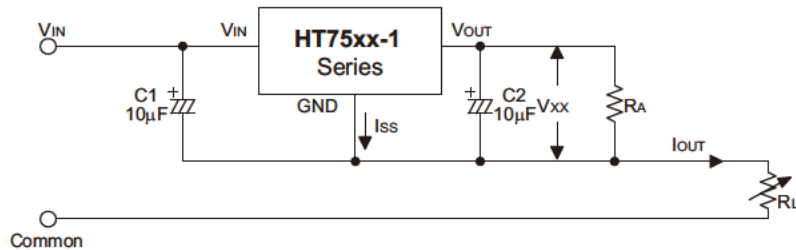

$$I_{OUT} = \frac{V_{xx}}{R_A} + I_{SS}$$

Dual Supply

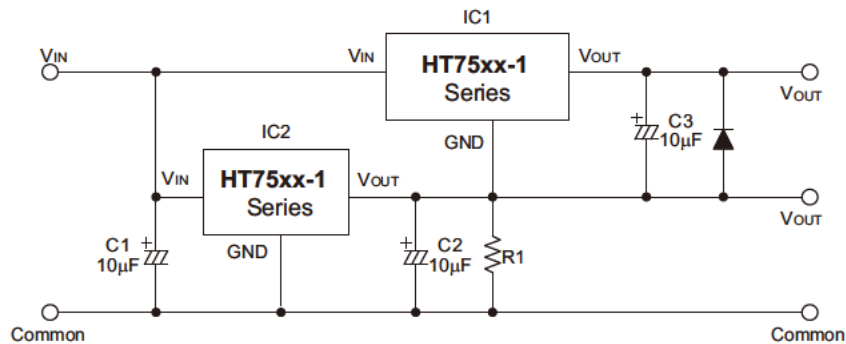

## Package Information


Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consult the [Holtek website](#) for the latest version of the package information.

Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- [Further Package Information](#) (include Outline Dimensions, Product Tape and Reel Specifications)
- [Packing Materials Information](#)
- [Carton information](#)
- [PB FREE Products](#)
- [Green Packages Products](#)




**3-pin TO92 Outline Dimensions**

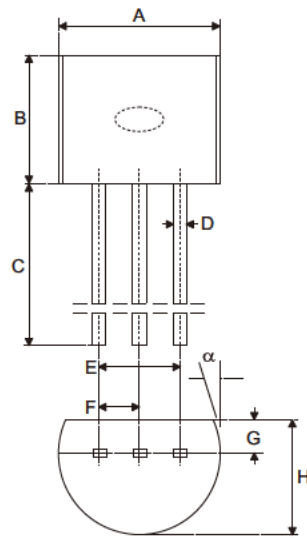


Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.170	—	0.200
B	0.170	—	0.200
C	0.500	—	—
D	0.011	—	0.020
E	0.090	—	0.110
F	0.045	—	0.055
G	0.045	—	0.065
H	0.130	—	0.160
$\alpha$	0°	—	10°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	4.32	—	5.08
B	4.32	—	5.08
C	12.70	—	—
D	0.28	—	0.51
E	2.29	—	2.79
F	1.14	—	1.40
G	1.14	—	1.65
H	3.30	—	4.06
$\alpha$	0°	—	10°

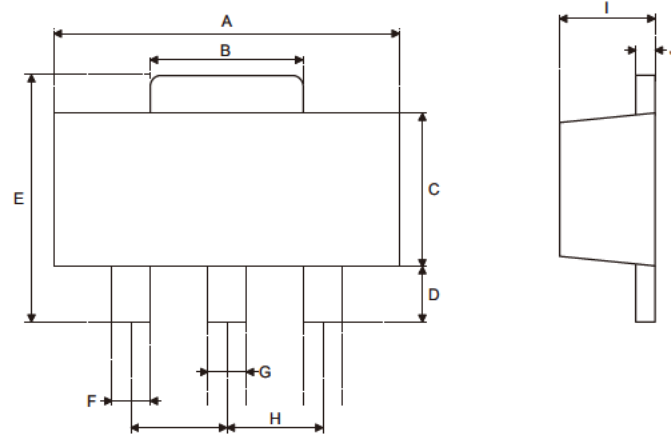**3-pin SOT89 Outline Dimensions**


Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.173	—	0.181
B	0.059	—	0.072
C	0.090	—	0.102
D	0.035	—	0.047
E	0.155	—	0.167
F	0.014	—	0.019
G	0.017	—	0.022
H	—	0.059	—
I	55	—	63
J	14	—	17

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	4.39	—	4.60
B	1.50	—	1.83
C	2.29	—	2.59
D	0.89	—	1.19
E	3.94	—	4.24
F	0.36	—	0.48
G	0.43	—	0.56
H	—	1.50	—
I	1.40	—	1.60
J	0.36	—	0.43

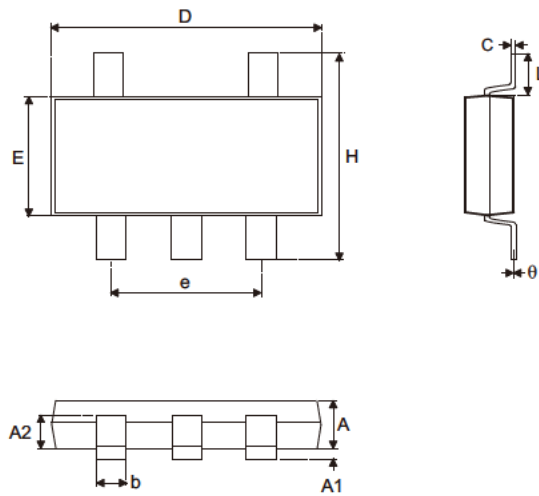**5-pin SOT23-5 Outline Dimensions**


Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.039	—	0.051
A1	—	—	0.004
A2	0.028	—	0.035
b	0.014	—	0.020
C	0.004	—	0.010
D	0.106	—	0.122
E	0.055	—	0.071
e	—	0.075	—
H	0.102	—	0.118
L	0.015	—	—
$\theta$	0°	—	9°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	1.00	—	1.30
A1	—	—	0.10
A2	0.70	—	0.90
b	0.35	—	0.50
C	0.10	—	0.25
D	2.70	—	3.10
E	1.40	—	1.80
e	—	1.90	—
H	2.60	—	3.0
L	0.37	—	—
$\theta$	0°	—	9°

Copyright © 2013 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.