
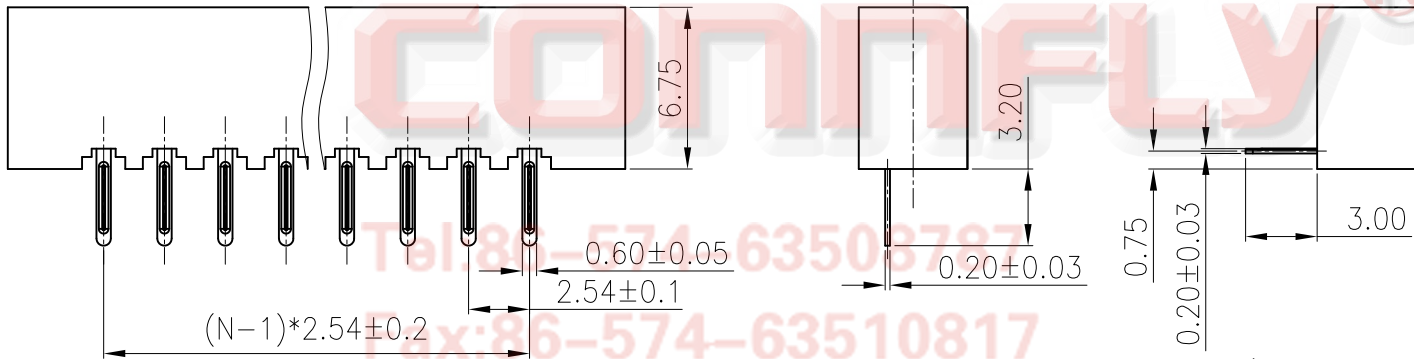


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 10/04/05'		

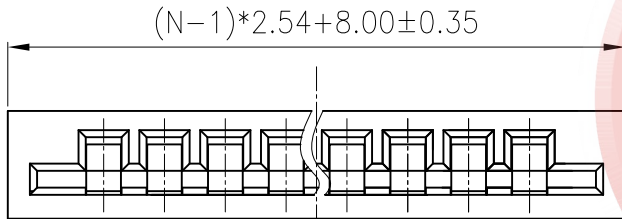



N:NUMBER OF CONTACTS

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE:-40°C~+105°C.
  - CONTACT RESISTANCE:20mΩ max.
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PART NUMBER: DS1020

4. PRODUCT NUMBER CODE:

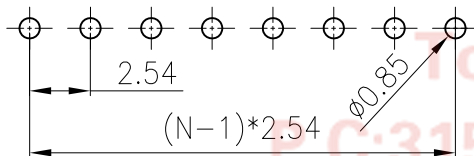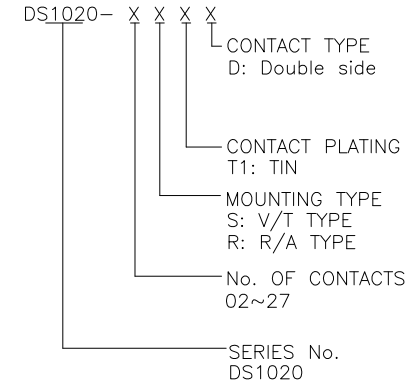

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)


GENERAL TOLERANCE

X.	±0.60
.X	±0.38
.XX	±0.25

ANGLE TOLERANCE

X.	±5°
.X	±3°
.XX	±2°

PROJECTION



UNITS

mm

SHEET SIZE

A4

TITLE

FFC/FPC CONNECTOR

PITCH 2.54mm LIF.T/H

SERIES

DS1020 SERIES

DRAWING TYPE

CUSTOMER

SCALE

1:1

SHEET

1 OF 1

DRAWING NO.

C-DS1020-XXXX



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD