

Product: SNP12-VF / SNP12-IF

Super slim Power Supply / Led Driver

power-supply.it

alimentatori.shop



Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP12-12VF	12V	0-12W	1.0A	≥ 0.5	45 °C	80 °C	127.3X49.8X10.7
SNP12-24VF	24V	0-12W	0.5A	≥ 0.5	45 °C	80 °C	127.3X49.8X10.7

Model No.	Constant output current	Load	Max output voltage	PF	Ta	Tc	L×W×H
SNP12-350IF	350mA	0-12W	34VDC	≥ 0.5	45 °C	80 °C	127.3X49.8X10.7
SNP12-500IF	500mA	0-12W	24VDC	≥ 0.5	45 °C	80 °C	127.3X49.8X10.7
SNP12-700IF	700mA	0-12W	17VDC	≥ 0.5	45 °C	80 °C	127.3X49.8X10.7

Reliable Technical Data


- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:12W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012



NEW direct plug-in feature!

W M F 119 SELV

CE SAA N12 CB

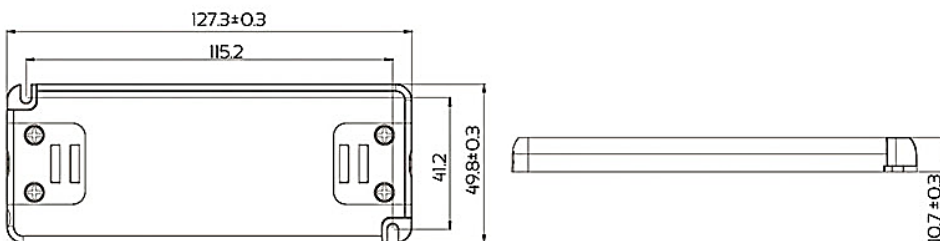

Dimension in mm