



Characteristics

Rated input voltage: AC100-240V 50/60Hz (power factor measured at AC230V and full load)



Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP100-12VLP-1	12V	0-100W	8.33A	≥0.9	45°C	85°C	216X67.5X33.6
SNP100-24VLP-1	24V	0-100W	4.2A	≥0.9	45°C	85°C	216X67.5X33.6
SNP100-36VLP-1	36V	0-100W	2.78A	≥0.9	45°C	85°C	216X67.5X33.6
SNP100-48VLP-1	48V	0-100W	2.08A	≥0.9	45°C	85°C	216X67.5X33.6

Model No.	Constant output current	Load	Max output voltage	PF	Ta	Tc	L×W×H
SNP100-700ILP	700mA	50-100W	143VDC	≥0.9	50°C	80°C	216X67.5X33.6
SNP100-1050ILP	1050mA	50-100W	96VDC	≥0.9	50°C	80°C	216X67.5X33.6
SNP100-1400ILP	1400mA	50-100W	72VDC	≥0.9	50°C	80°C	216X67.5X33.6
SNP100-2100ILP	2100mA	50-100W	48VDC	≥0.9	50°C	80°C	216X67.5X33.6
SNP100-3600ILP	3600mA	50-100W	28VDC	≥0.9	50°C	80°C	216X67.5X33.6
SNP100-4200ILP	4200mA	50-100W	24VDC	≥0.9	50°C	80°C	216X67.5X33.6

Reliable Technical Data

- Rated Input Voltage:100-240VAC
- Input Frequency:50/60Hz
- Output Power:100W
- Dimension:L216xW67.5xH33.6mm
- Body: Metal Body By Waterproof Grade IP67
- Open Circuit; Short Circuit; Over Load;
- Over Heat Protection
- Safety According to EN61347-1, EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2; EN61000-3-3; EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012
- Conforms to UL Std. 8750
- Cert. to CAN/CSA Std. C22.2 No.233-M91

SELV

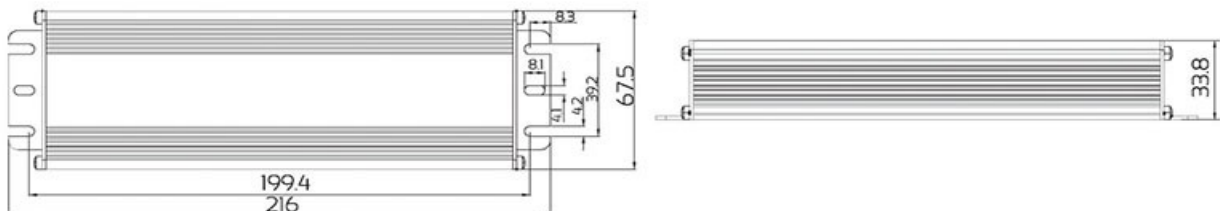

Dimension in mm