


YS-802 SMD components counter with empty pocket check

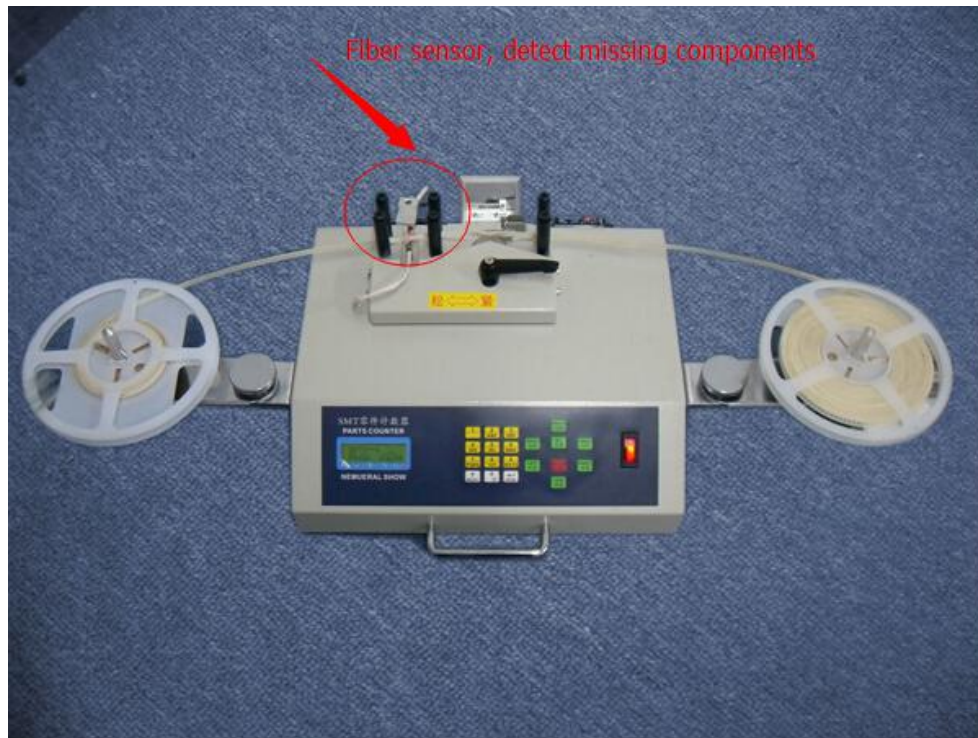

Function information:

- 1、 Leak detection SMD parts counter, easy to operation, small in size and convenient to use.
- 2、 It can be count both by forward and reverse, which is very accurate and has zero error, especially designed for SMD parts.
- 3、 Within the function of leak detection, when there is a missing parts, this machine will be stoped and make a voice.
- 4、 You can set a number you need, when the counting finished the machine will be stopped, which is very convenience for you to count, issue and receive the SMD spare parts.
- 5、 It could be equip the scanning and bar code printer, convenience for you to operate.
- 6、 It is small and light weight, convenient to carry, designed especially for SMD factory which use to count the SMD parts.

Typical specifications:

- 1.Power source: AC220V/110V, 50HZ
2. Count speed: 24000PCS /minutes
3. Rated power: 30W
4. Count range: From -99999 to 99999pcs
5. Machine measurement: L490*W280*H280mm
6. Weight: 11kg
- 7.Applicative tape diameter: every type of SMD tape is ok

- 8. Pitch: 2.4.8.10.12.16.32.44.56mm
- 9. Applicative tape width: 8,12,16,24,32,44,56mm
- 10. Packaging detail: Carton box with foam plastics
- 11. Packing weight: 14kg

Optional device: Bar code printer

The printer will be connected with counter, after counting, it can print a bar code with QTY, Date, Part Number, even your company, etc.

