



EE20/10,5 0,5VA

Özellikleri

VDE 0570 / EN 61558 Normuna
Göre Vakum Dolgulu İki Bölmeli
Sarımsız İzolasyon Sınıfı 70° C/F
Ağırlığı 35 Gr.

Characteristic

According to VDE 0570 / EN 61558
Potted under vacuum Split-Bobbin
winding Insulation Class ta 70° C/F
Weight 35 Gr.

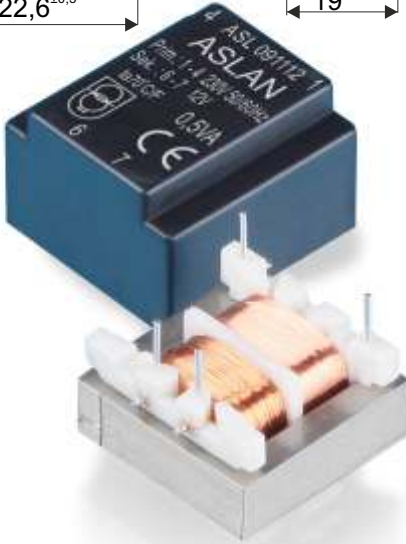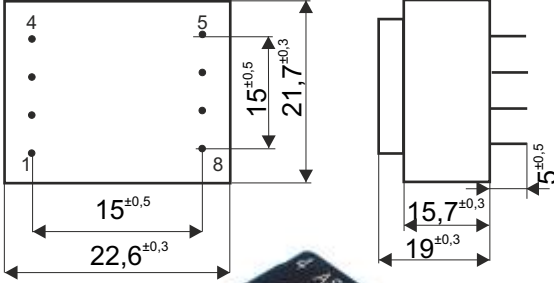

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTAKİ VOLTAJI [V] No-Load Voltage
ASL 091106	230V~	6	83,3	1 - 4 / 6 - 7	11,0
ASL 091108	230V~	7.5	67	1 - 4 / 6 - 7	12,7
ASL 091109	230V~	9	55,5	1 - 4 / 6 - 7	16,5
ASL 091112	230V~	12	41,6	1 - 4 / 6 - 7	20,6
ASL 091115	230V~	15	33,3	1 - 4 / 6 - 7	26,0
ASL 091118	230V~	18	27,8	1 - 4 / 6 - 7	31,1
ASL 091124	230V~	24	20,8	1 - 4 / 6 - 7	41,1
ASL 091206	230V~	2 x 6	2 x 41,6	1-4 / 5 - 6,7 - 8	2 x 10,9
ASL 091208	230V~	2 x 7.5	2 x 33	1-4 / 5 - 6,7 - 8	2 x 12,7
ASL 091209	230V~	2 x 9	2 x 27,7	1-4 / 5 - 6,7 - 8	2 x 16,4
ASL 091212	230V~	2 x 12	2 x 20,8	1-4 / 5 - 6,7 - 8	2 x 20,6
ASL 091215	230V~	2 x 15	2 x 16,6	1-4 / 5 - 6,7 - 8	2 x 25,8
ASL 091218	230V~	2 x 18	2 x 13,8	1-4 / 5 - 6,7 - 8	2 x 30,9
ASL 091224	230V~	2 x 24	2 x 10,4	1-4 / 5 - 6,7 - 8	2 x 41,3