











## Ejector Header 2.54mm SMT / Right Angle / Straight Type

### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Standard Plating: Gold Flash

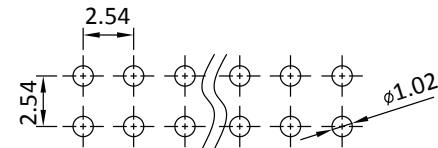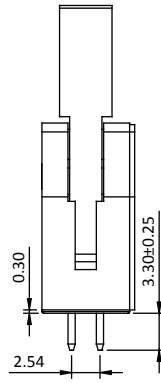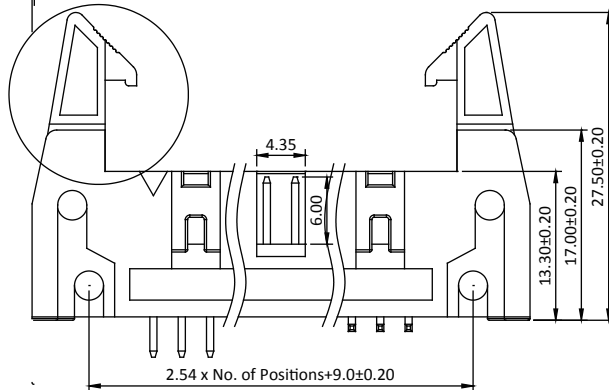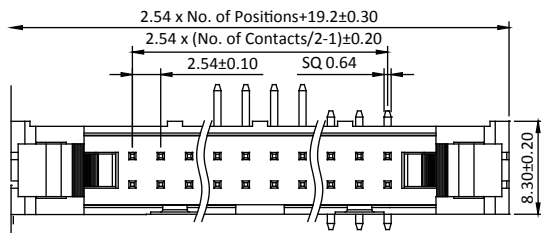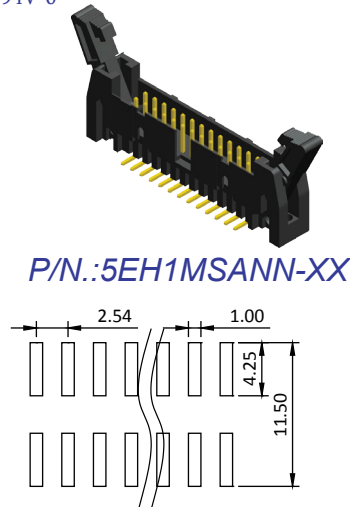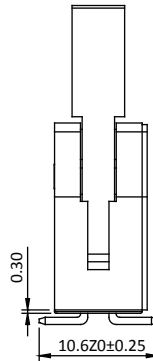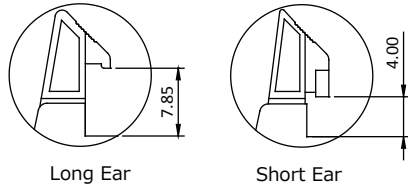

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

## ORDER INFORMATION

5 E H 1 X X A N N - X X X X

No. of Contact  
 (10~64)

1: W/O Peg long ejector  
 3: W/O Peg short ejector

U: RoHS Hi-Temp.  
 L: RoHS + PBT

MS: Straight SMT  
 RD: R/A DIP  
 SD: Straight DIP

⊙G0: Gold Flash    S0: Selective  
 GA: Gold 5u"    SA: Selective 5u"  
 GB: Gold 10u"    SB: Selective 10u"  
 GC: Gold 20u"    SC: Selective 20u"  
 GD: Gold 30u"    SD: Selective 30u"  
 T0: Tin Plated  
 TE: Tin 200u"

⊙A: Tray, W/O Cap  
 T: Tube, W/O Cap

⊙: Standard Recommend  
 Tube package is not available for under 1\*5 & 2\*5 pin counts