

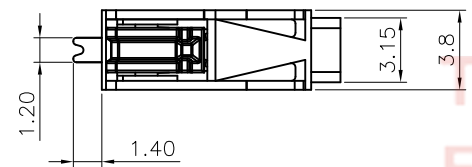
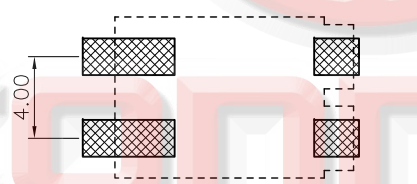
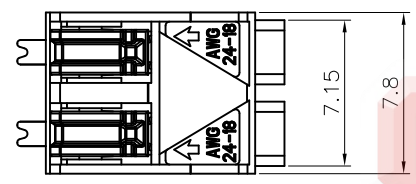
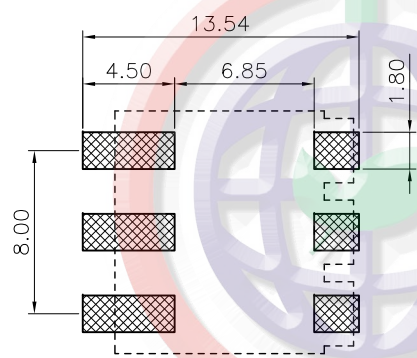
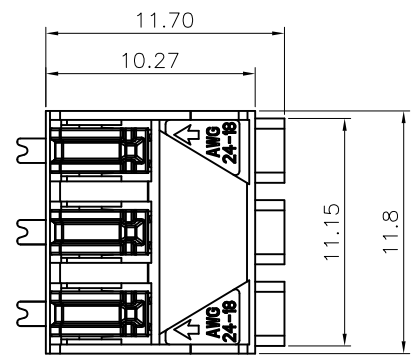


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/24/14'	~	LJC 01/24/14'
B	Terminal Change	JLZ 02/26/15'	~	

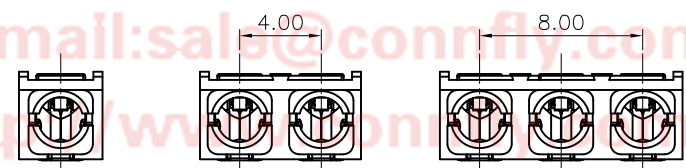

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

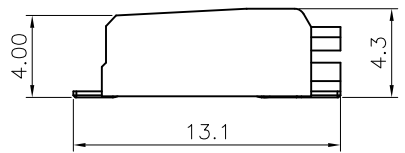

NOTES:

1.Materials:

1.1. Insulator: High Temperature ,UL94 V-0 Rated, RoHS,REACH compliance.

1.2. Contact: Copper Alloy, Plating Matt Tin .

2.Specifications:

2.1. Temperature Range: -45~+105°C.

2.2. Contact Resistance: 20mΩ maximum.

2.3. Insulation Resistance: 1000MΩ minimum.

2.4. Voltage Rating: 320V AC/DC.

2.5. Current Rating: 9A max per pin.

2.6. Application wire range:

1.single solid wire: 0.2-0.75mm².

2.stranded type wire: 24-18AWG.

2.7. Resistance to soldering heat: 260°C,3-5seconds.

3.Packing Type: Tape on reel,1P: 1500pcs/Reel,2P: 1000pcs/Reel,


3P: 750pcs/Reel.

4. Product Number Code:

DS1137-10 - X X X X X

- Packing Type
- R: Tape On Reel.
- Pin plating
- 6: Full matt tin.
- Housing Color
- A: Gray
- Connector Type
- F: Female
- No. of positions
- 01: 1p
- 02: 2p
- 03: 3p

Tel:86-574-63308787
Fax:86-574-63310817
E-mail:sales@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315333

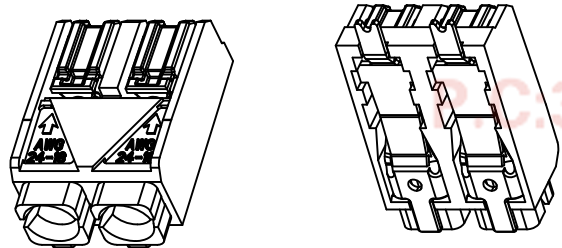

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	

PROJECTION		TITLE	4.00mm LED Series Terminal Block SMT Type
UNITS	mm	SERIES	
SHEET SIZE	A4		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD