
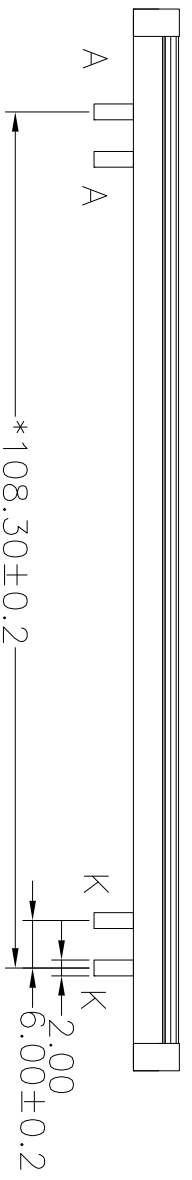
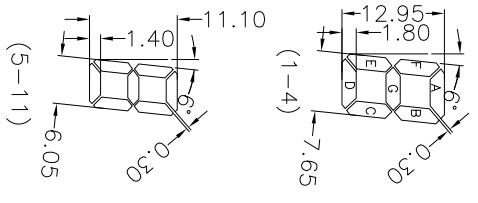
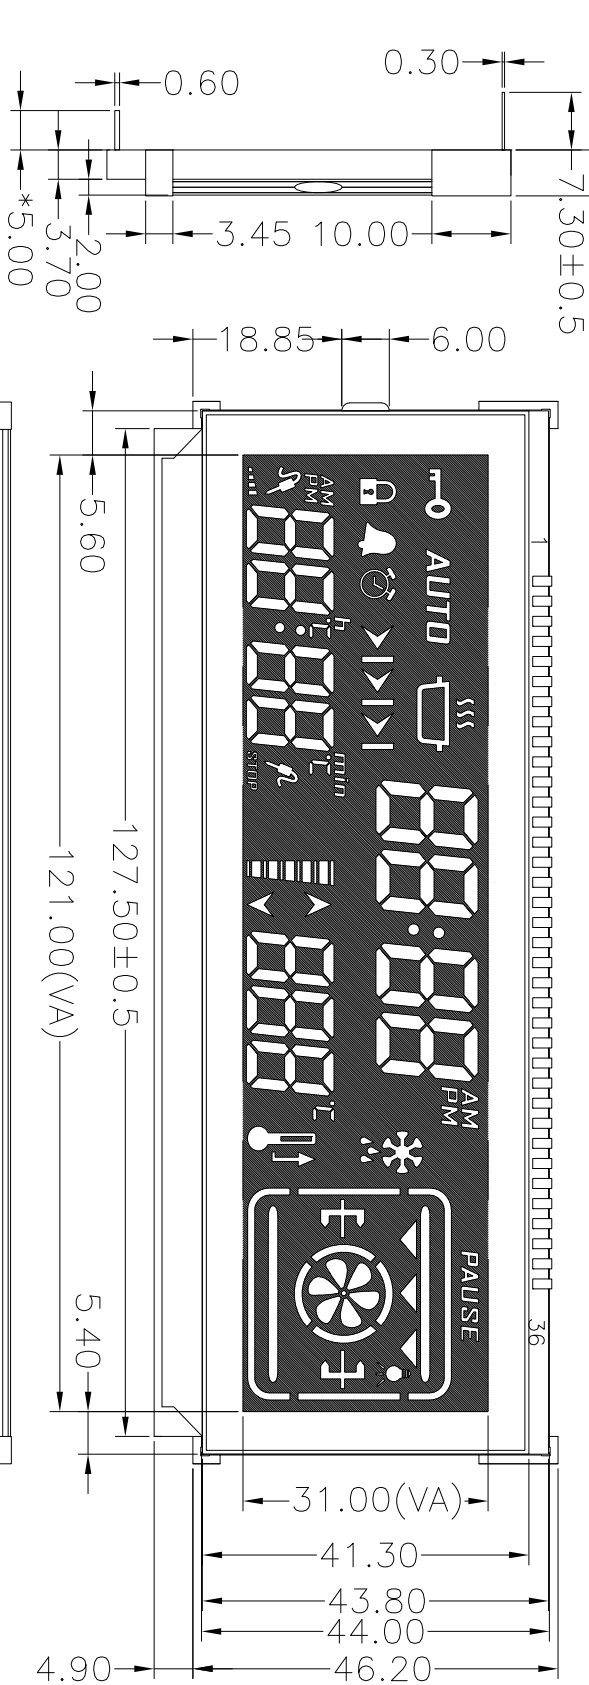


REV.	CHANGE CONTENT	BY	DATE
A	H500A79-Vc change the graphics	HY	2016.2.23

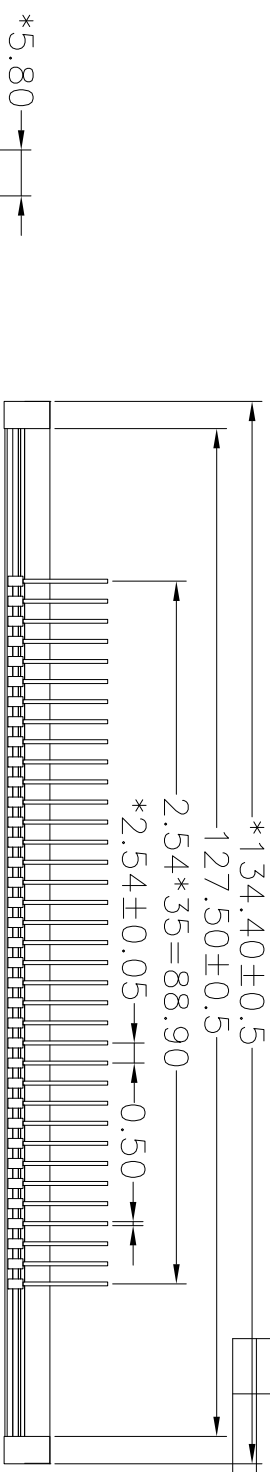


- NOTE:
- 1 DISPLAY TYPE : VA NEGATIVE
 - 2 VIEWING DIRECTION : 120°CLOCK
 - 3 POLARIZER MODE : TRANSMISSION
 - 4 DRIVE METHOD : 1/4 DUTY 1/3BAIS
 - 5 OPERATING VOLTAGE : 5V
 - 6 OPERATING TEMP : -20°C~+70°C
 - 7 STORAGE TEMP : -30°C~+80°C
 - 8 BACKLIGHT:WHITE,V=5V,I=90mA
 - 9 UNMARKED TOLERANCE: ±0.25mm

HTDISPLAY CO., LTD

DESIGN	HY	2016. 02. 23	REV. : A	SCALE : -
CHECKED	HYQ	2016. 02. 23	PROJECTION:	UNIT : MM
APPROVED	JYQ	2016. 02. 23		SHEET : 1/3

DRAWING No. : H500A79-VCA
DRAWING TITLE: LCD MODULE
FILE NO. :

REV.	CHANGE CONTENT	BY	DATE

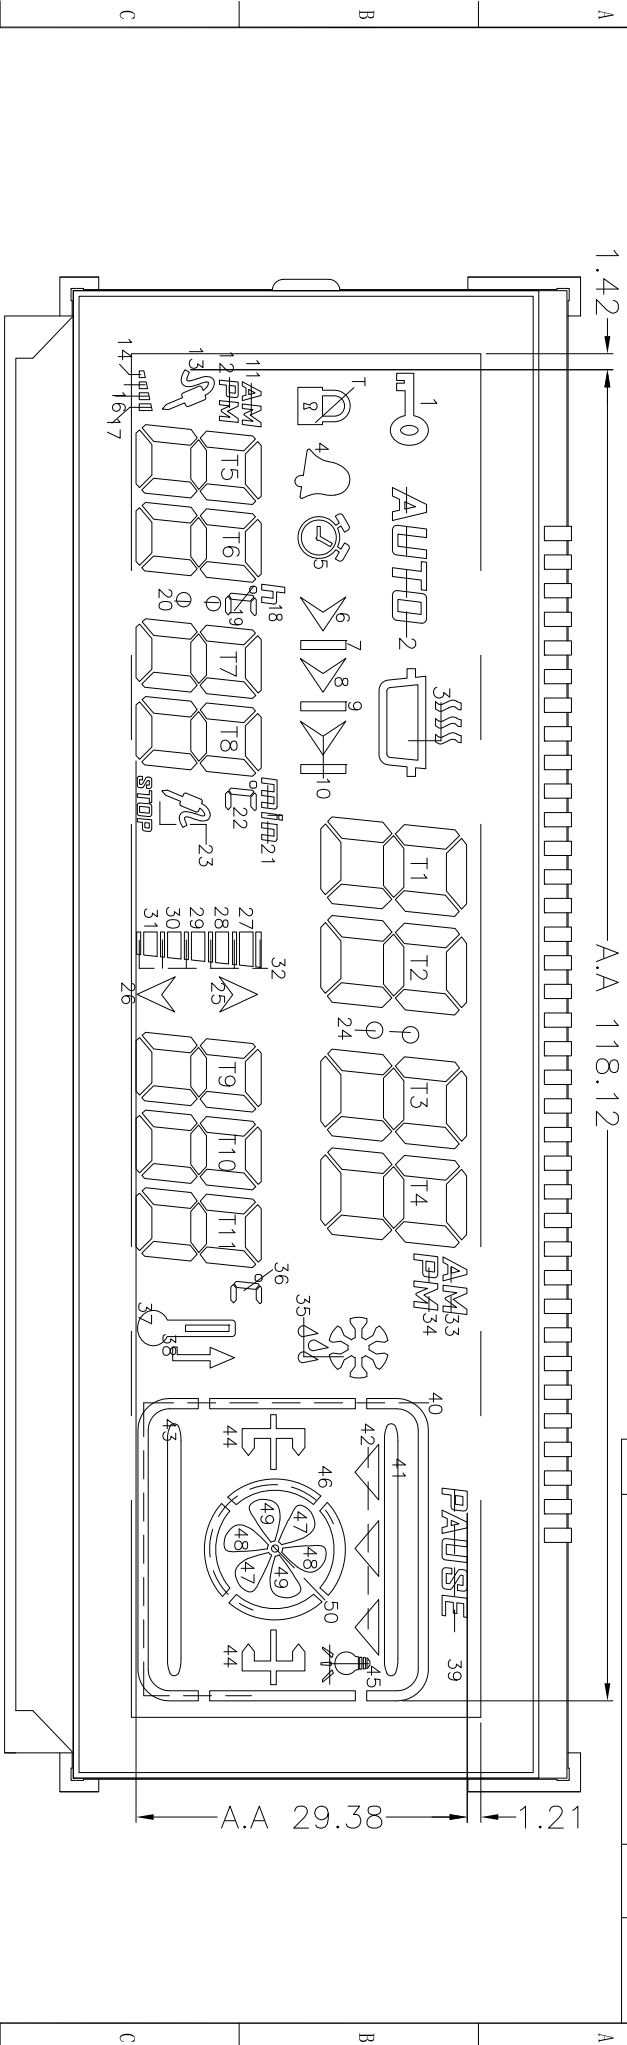


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
COM1	COM1				17	T	19	T5D	20	T6D	5	6	18	T7D	31	T8D	23	3	T1D
COM2		COM2			16	13	T5E	T5C	16	T6C	4	7	T7E	T7C	T8E	T8C	22	T1E	T1C
COM3			COM3		15	12	T5G	T5B	T6G	T6B	1	8	T7G	T7B	T8G	T8B	21	T1G	T1B
COM4			COM4	14	11	T5F	T5A	T6F	T6A	2	9	9	T7F	T7A	T8F	T8A	10	T1F	T1A

PIN	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1	T2D	24	T3D	32	T4D	26	28	T9D	29	T10D	30	T11D	38	42	47	44	
COM2	T2E	T2C	T3E	T3C	T4E	T4C	25	T9E	T9C	T10E	T10C	T11E	T11C	37	41	48	43
COM3	T2G	T2B	T3G	T3B	T4G	T4B	34	T9G	T9B	T10G	T10B	T11G	T11B	36	40	49	45
COM4	T2F	T2A	T3F	T3A	T4F	T4A	33	T9F	T9A	T10F	T10A	T11F	T11A	35	39	50	46

HTDISPLAY CO., LTD

DRAWING No. : HS00A79-VCA		REV. : A		SCALE : 1 : 1	
DRAWING TITLE : LCD MODULE		CHECKED : HYQ		UNIT : mm	
FILE NO. :		APPROVED : JYQ		SHEET : 2/3	
DESIGN : HY		2016.02.23		PROJECTION:	
2016.02.23		2016.02.23		UNIT : mm	
2016.02.23		2016.02.23		SHEET : 2/3	

REV.	CHANGE CONTENT	BY	DATE

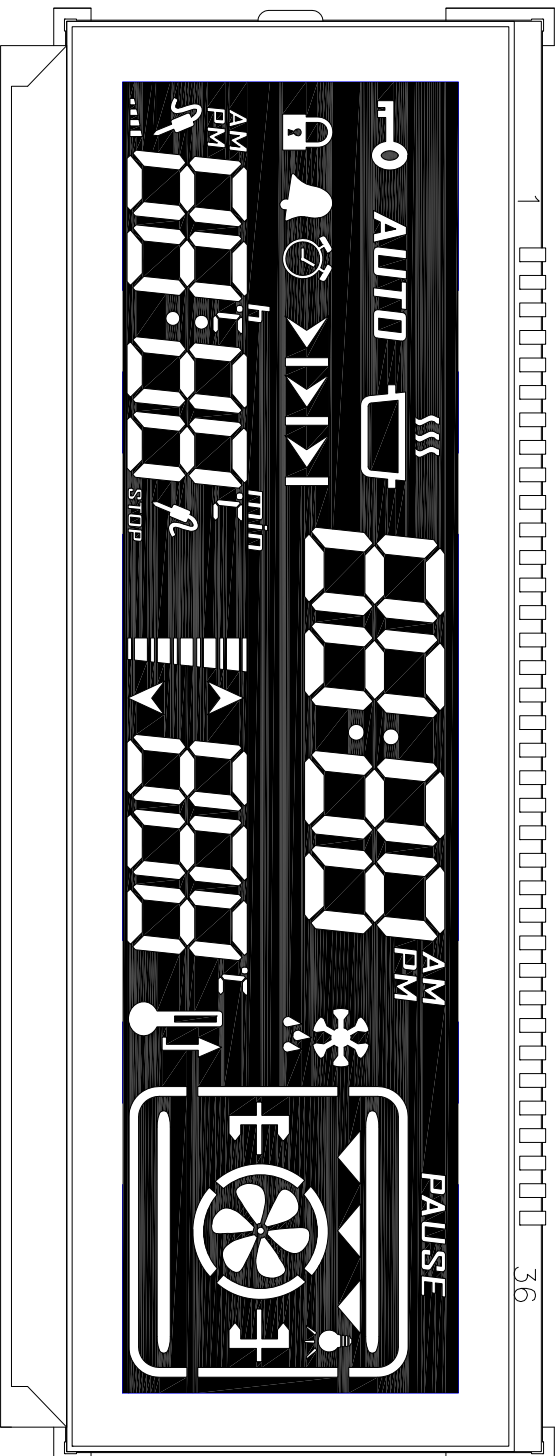

HTDISPLAY CO., LTD

DRAWING No. : HS00A79-VCA		REV. : A	SCALE : 1 : 1
DRAWING TITLE : LCD MODULE		PROJECTION:	UNIT : mm
FILE NO. :			SHEET : 3/3
DESIGN	HY	2016. 02. 23	
CHECKED	HYQ	2016. 02. 23	
APPROVED	JYQ	2016. 02. 23	