


# BUZZER

## SMT Buzzer Series



KLS3-SMT-05\*03 5\*5\*3mm SMT Transducer Buzzer Series

### SPECIFICATIONS

|                      |                                    |
|----------------------|------------------------------------|
| Rated Voltage        | 3.0V <sub>O-P</sub>                |
| Operating Voltage    | 2-4V <sub>O-P</sub>                |
| Max. Rated Current   | 110mA                              |
| Min. S.P.L. (@ 10cm) | MIN. 80dB at Rated Voltage at 10cm |
| Coil Resistance(Ω)   | 12±3Ω                              |
| Resonant Frequency   | 4000Hz                             |
| Operating Temp       | -20 ~ +70 °C                       |
| Weight               | 0.5g                               |

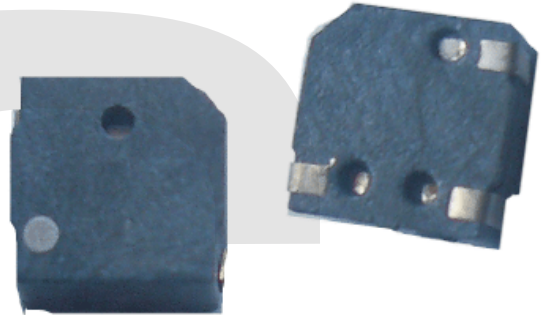

Dimensions (Unit:mm)

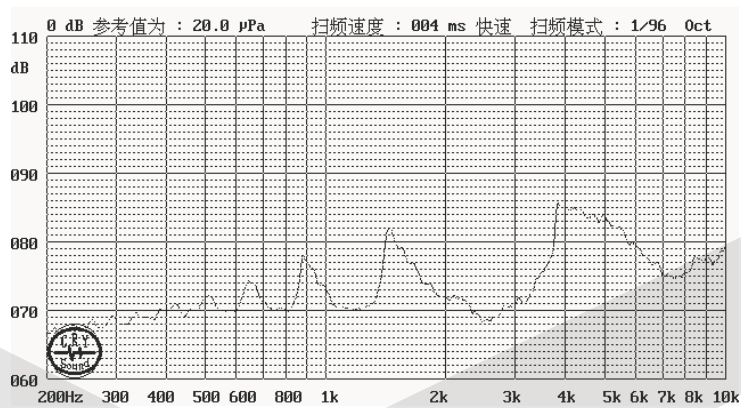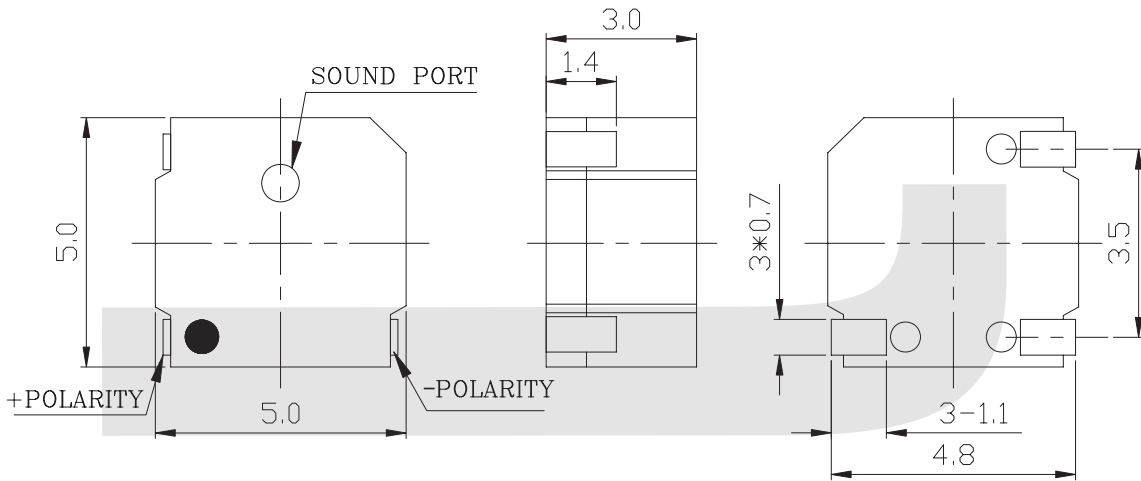

## ORDER INFORMATION

Product NO.: KLS3-SMT - 05\*03

Part Number \_\_\_\_\_  
SMT Buzzer Series \_\_\_\_\_ Size specifications \_\_\_\_\_

III