


HSF RoHS

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

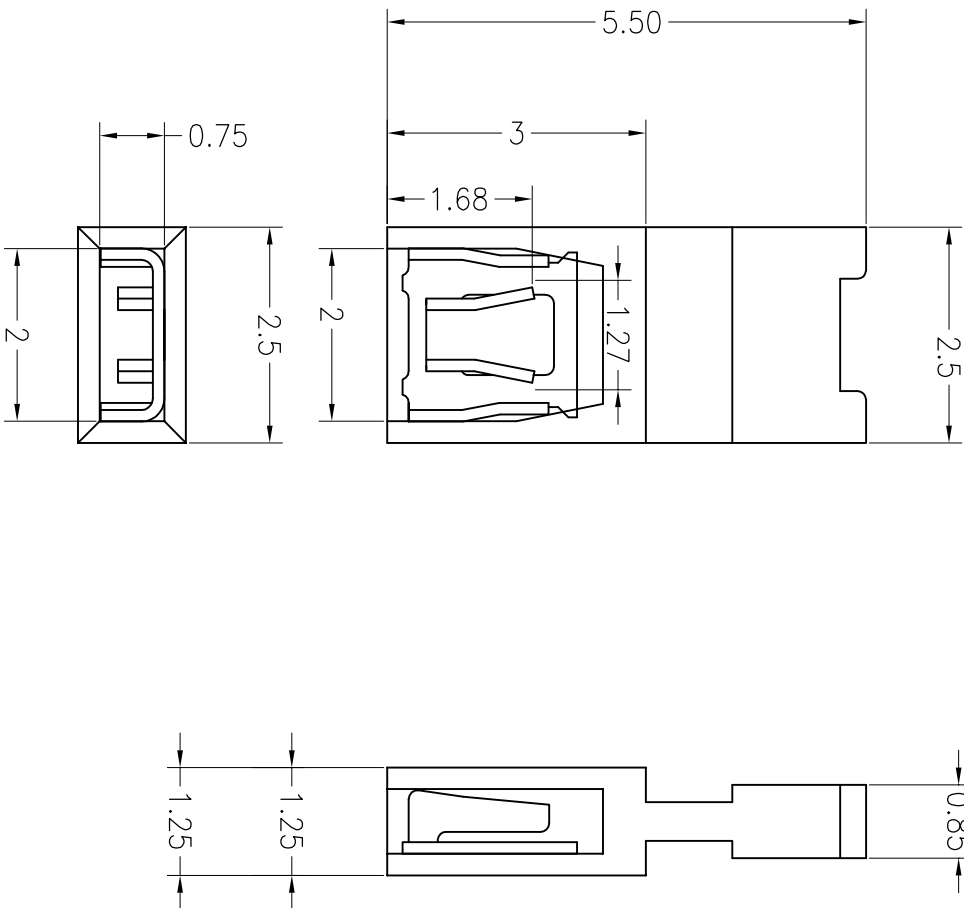

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Y.YuSheng	12.04.18	SCALE	FIT	PART NO.	TITLE:
				X.X	±0.30				UNIT	mm		
A0	2012.04.18	NEW DRAWING		X:XX	±0.20	CHECK					L-KLS1-203C-C-B-5.5	
1				Angle	±3°	APPROVE					1.27 Mini Jumper 1Port 带柄	