
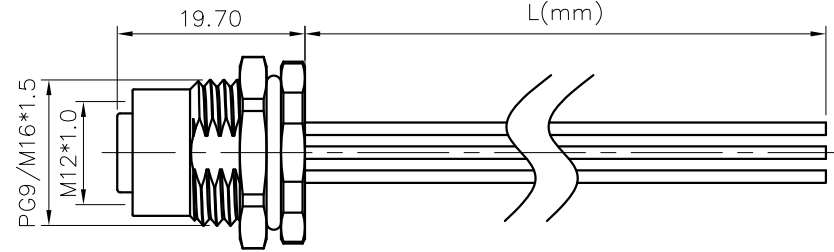



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------


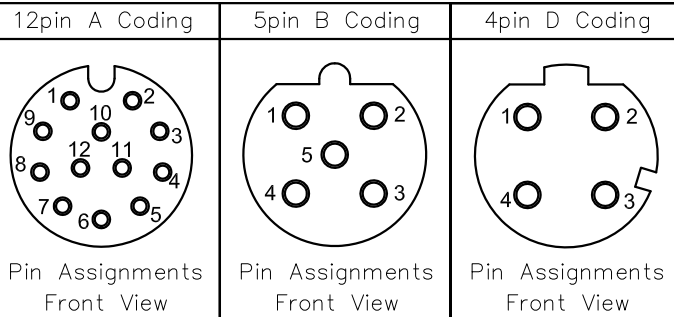


Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
12	Red/Blue				
11	Grey/Pink				
10	Violet				
9	Red				
8	Grey				
7	Black				
6	Yellow				
5	Pink	5	Grey		
4	Green	4	Black	4	Black
3	White	3	Blue	3	Blue
2	Blue	2	White	2	White
1	Brown	1	Brown	1	Brown
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out	


SS-M12X-XXP-FF-SF7XXX-00B(H)
 Coding: A,B,D
 Pin number: 03,04,05, 08,12
 Thread specification:
 A: PG9;
 B: M16*1.5
 XX: 150~1500mm
 15: 150±15mm
 30: 300±20mm
 50: 500±20mm
 A0: 1000±40mm
 A5: 1500±40mm
 Wire Length L:
 150~1500mm

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
8pin A: 30V / 2A
12pin A: 30V / 1.5A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin: AC1500V/1Min
5pin: AC1120V/1Min
6,8pin: AC500V/1Min
- Levels of protection: IP67
- Cable specifications :
3pin A: 22AWG/0.34mm²
4pin A/D: 22AWG/0.34mm²
5pin A/B: 22AWG/0.34mm²
6pin A: 24AWG/0.25mm²
8pin A: 24AWG/0.25mm²
12pin A: 26AWG/0.14mm²
- Wire connection mode: soldering
- Operating temperature: -25°C~+85°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance

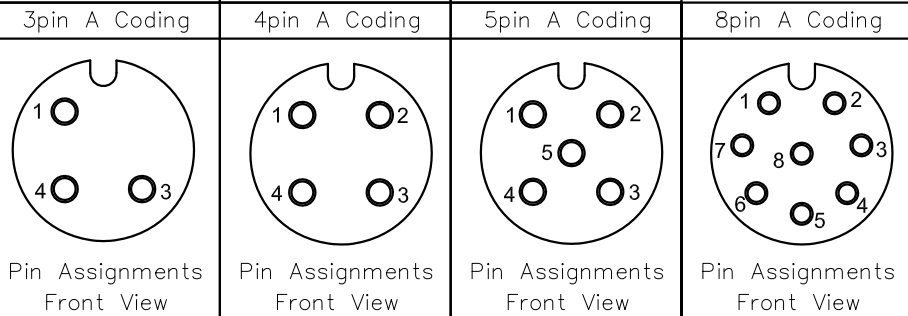

Thread specification:
PG9



				8	Red	
				7	Blue	
				6	Pink	
			5	Grey	5	Grey
4	Black	4	Black	4	Yellow	
3	Blue	3	Blue	3	Green	
		2	White	2	Brown	
1	Brown	1	Brown	1	White	
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	
Pin Out		Pin Out		Pin Out		

DETACHED LISTS	PART NO.: SSM12XXXPF7SF7XXX00BH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SS-M12X-XXP-FF-SF7XXX-00B(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: LZ 2018.10.08	REV: D0-1	SHEET: 1/2	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE: 1:1	DO NOT SCALE DRAWING