



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2018/04/13



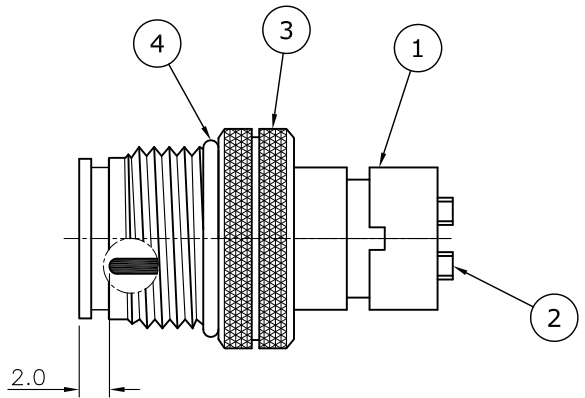


SPECIFICATION:

1. CURRENT RATING: 5A
2. VOLTAGE: 125V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C



D-Coding, Male Pin

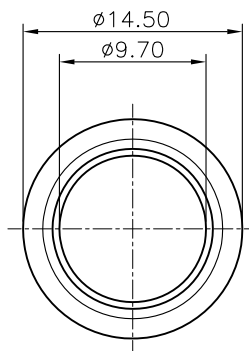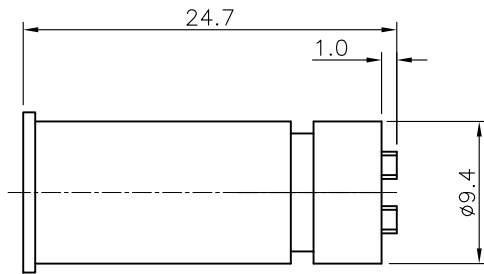

5	EPOXY	
4	ORING	EPDM
3	NUT	Brass, Nickel plating
2	CONTACT	Brass, 10u" Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.	PART NAME	DESCRIPTION					
UNLESS OTHERWISE SPECIFIED TOLERANCE							
UNIT:	DECIMAL	LINEAR	ANGLES				
mm	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
www.attend.com.tw							
DRAWN	Fros	2018/04/13	DRAWN NAME:				
CHECKED	Tim	2018/04/13	M12 D-Code Plug for Cable, 4 Pin Male For Overmold with Cable				
APPROVED	Ken	2018/04/13	PRODUCT NO. 216D-04M00				
SCALE	1/1	SHEET	1/1	SIZE	A4	FILE NAME	216D-04M00_B_1

