

TECHNICAL  
SPECIFICATIONS

Product Code	PM018-MI124-SCH
Dimension (mm) W x L x H	50x50x6,4
Material	PMMA
Fastening	Screw
Beam Angle	18°
Type	24 in 1
Optical Efficiency	%93
Rohs Complaint	Yes

MATERIALS

PMMA clear, Non-yellowing for 10 years.

Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:

- YI 6 under hot/dry conditions
- YI 8 under hot/wet conditions

INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C

Storage Temperature : -40° C ~ +100° C


Please handle or install lenses with wearing gloves.

Skin oils may damage lens or its optical characteristic.


Never use any commercial cleaning solvents on lenses , like alcohol.

If necessary, clean lenses wiht mild soap, water and soft cloth.


OSRAM DURIS S5

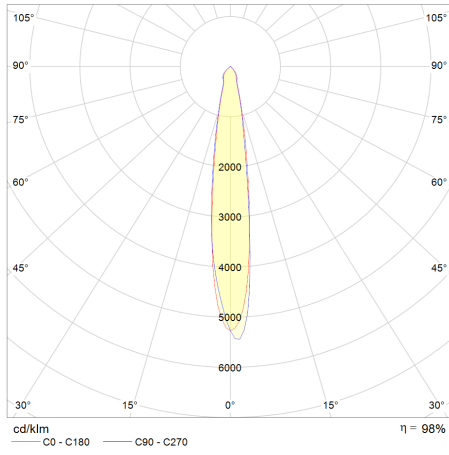


LUXEON 3030 2D

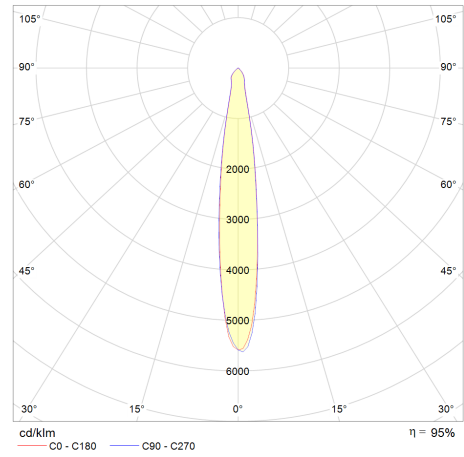


SEOUL MJT 3030

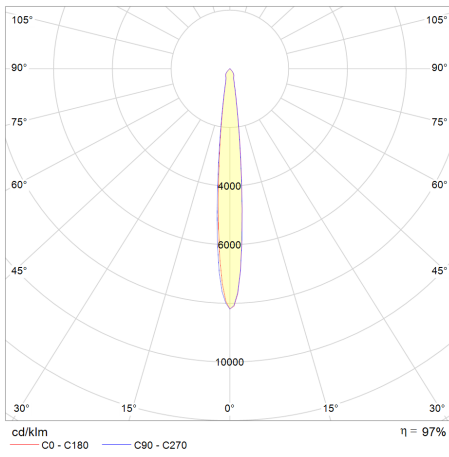


NICHIA NF2W 757 GR

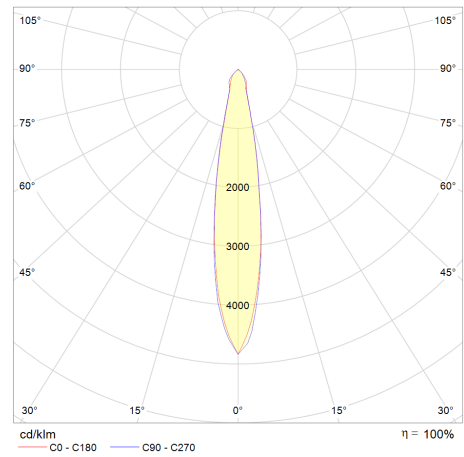



CREE J SERIES

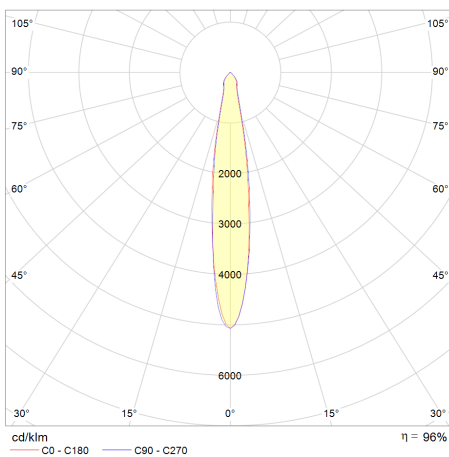

SAMSUNG LM302Z+

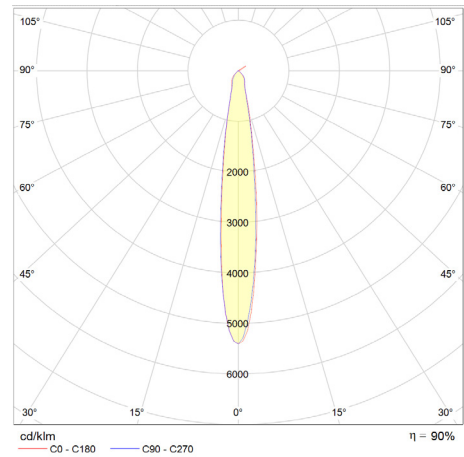

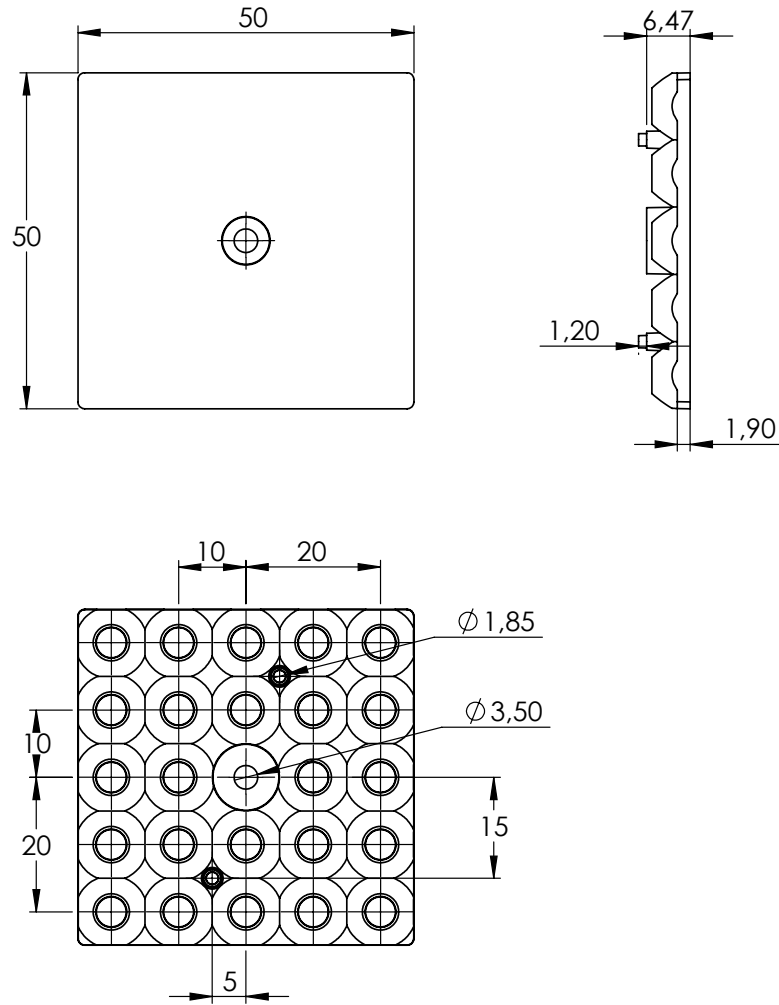

<b>EMAGE</b> <sup>®</sup>	UNIT mm	PART NO: PM018-MI124-SCH	 GENERAL TOLERANCES $\pm 0,2$ MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	11,06 g	1	
	DATE	22.06.2020	2	
			3	
		PAGE 1 / 1	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	8,9 Kg
Box Quantity	720 pcs

