



SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

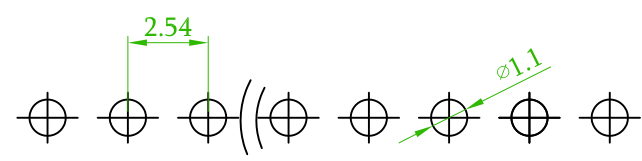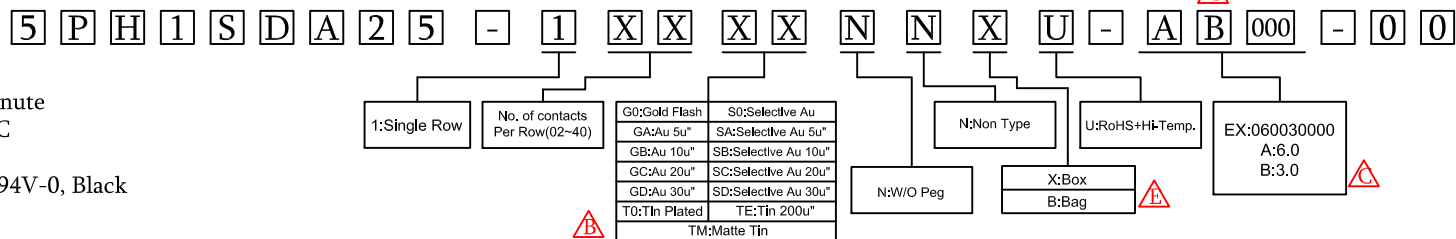

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

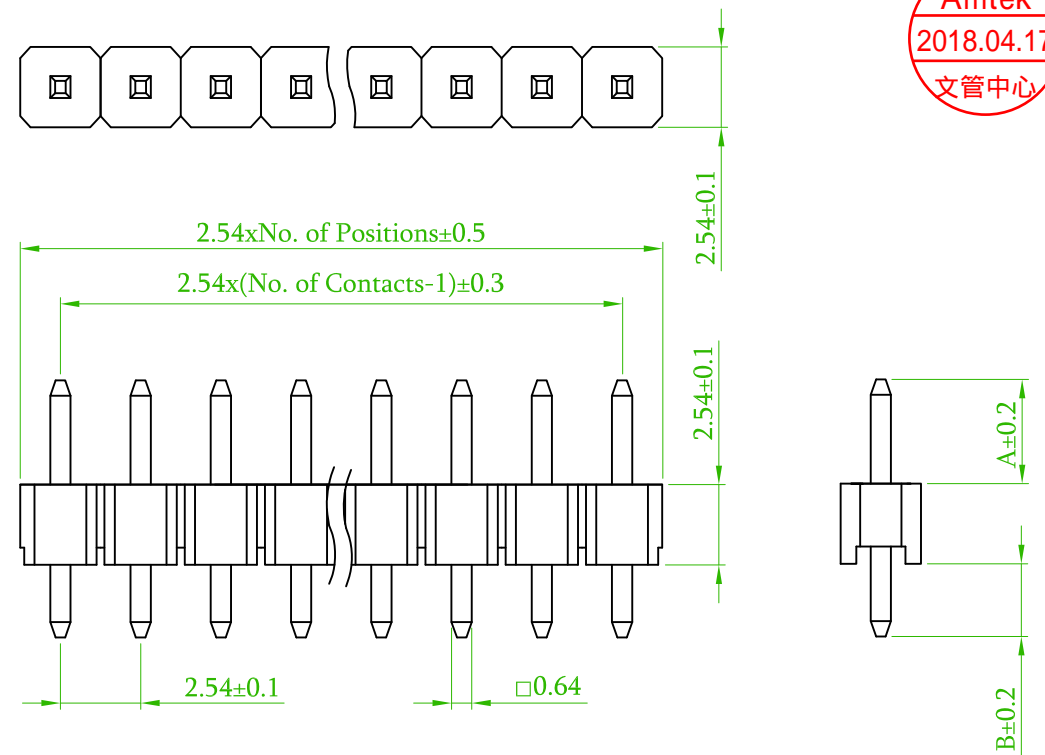

Old Part No. :PH1S25-1XX-U

⚠	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
⚠	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
⚠	Modify order information	Gary	2017/01/26
⚠	Add the Plated	Mia	2016/10/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH1SDA25-1XXXXNXXU -XXXXXX000-00		繪圖 DRAWN	Mia 2015/08/24	
圖號 DRAWING NO.	GN016-GA174	版本 REV.	E	核對 CHECKED	Josh 2018/03/22
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	