

Product Picture

14F1C-XZ1



14F2C-XZ1




Specification

Model	14F1C-XZ1	14F2C-XZ1
Rated current	10A	7A
Rated voltage	300V	
Dielectrics withstand voltage	2500V/S	
Ambient temperature	-40℃ ~75℃	
Material	Flame retardant –PA66+GF(V1/V0)	
Material of clip clutch	QSn6.5-0.1	
Installation	PCB	
Accessories	/	
Module	/	
Weight	Approx. 3.9g/PCS	
Packing	Carton with paper box inside	5000PCS/Carton, G.W.: 22KG, N.W.: 21KG, Dimension(mm): 420×250×370

Wiring Diagram

14F1C-XZ1

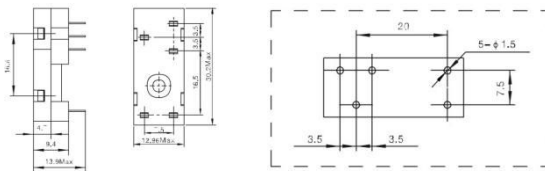

14F2C-XZ1

