
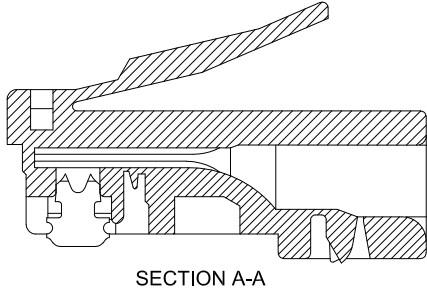


1 2 3 4 5 6 7

A




A

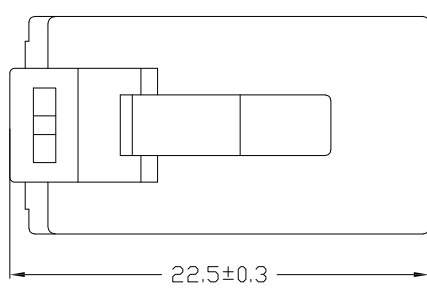

② NOTES:
MATERIAL
 Housing: PC UL94V-2
 Contact: Phosphor Bronze with 2 prongs
 Plating: Gold (see Ordercode)
 50 μ" Nickel under plated

B

B

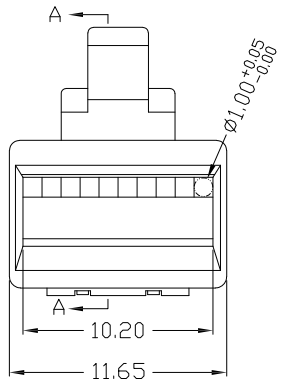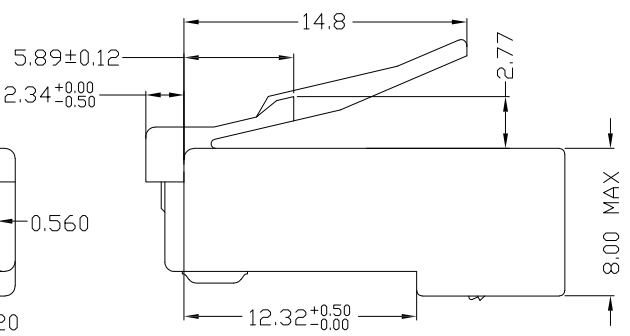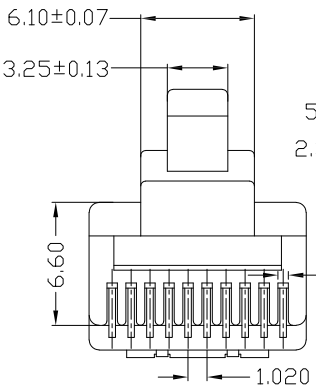

ELECTRICAL
 Current rating: 1.5A / 125V AC
 Withstand Voltage: 1000 VAC/minute
 Insulation Resistance: 500MΩ
 Contact Resistance: 20mΩ max.
 Tensile strength: 89N Min

D

D

ENVIRONMENTAL
 Operating temp.: -40°C to + 85°C
 Durability: 750 cycles
 Wire gauge: 30AWG-24AWG Stranded wire
 Cable OD size: flat cable 2.5*10.8mm MAX
 Wire size: 0.95±0.05mm


E

E

Order Code: A-MO 10/10-xxx
 SF =Au-flash
 F50 =Au 50u"

F

F

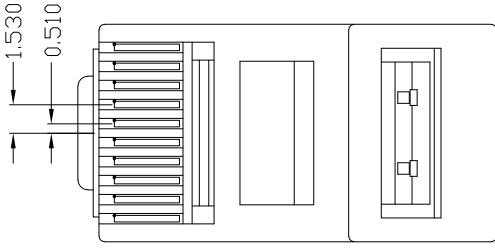

G

G

RoHS compliant
 Unit:mm

Scale	Free					Date	Name	
TOLERANCE						Drawn	13.06.2016	Winnie
.X	±0.20					Approved	05.11.2021	Luca
.XX	±0.10							
.XXX	±0.05	②	Add new PN and update notes	05.11.2021	Luca			
DIM	TOL	①	Add cable wire size information	03.04.2019	Amy			
X.°	±2°	①	Drawn	13.06.2016	Winnie			
Angle	TOL	Id.	Modification	Date	Name			

Description: Modular Connector
 male / 10P10C / UTP

ASSMANN WSW-No.
A-MO 10/10-F50
 ② **A-MO 10/10-SF**

Drawing-No. **ASS 7276 CO** rev02

Customer-No. SHEET 1 / 1

H

H

1 2 3 4 5 6 7