REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/14
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

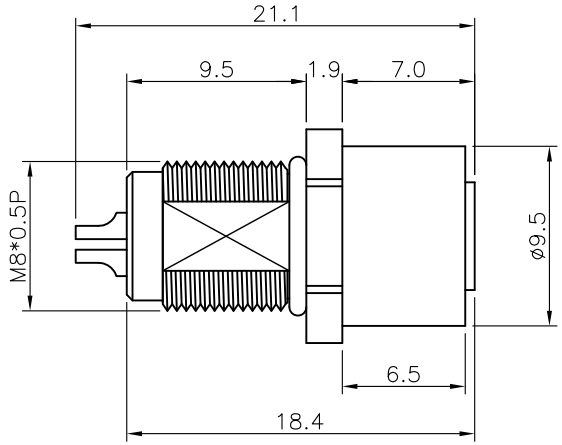

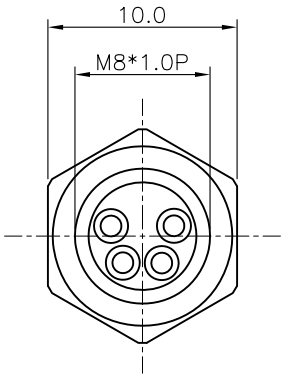

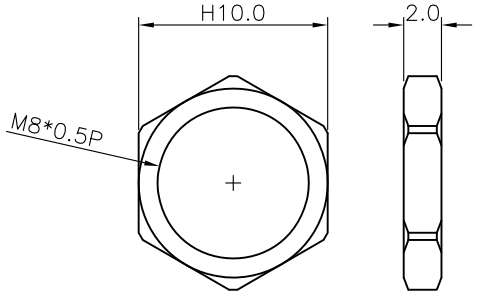

NUT



PANEL CUT

NO.	PART NAME	DESCRIPTION
5	O-RING	EPDM, Black
4	NUT	Brass, Nickel plated
3	SHELL	Brass, Nickel plated
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT,UL94V-0,Black

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

ATTEND

www.attend.com.tw

DRAWN	Fros	2022/03/14	DRAWN NAME: M8 A-Cocde Receptacle, 4Pin Female Solder type, Rear Fastened, G/F
CHECKED	Tim	2022/03/14	
APPROVED	Ken	2022/03/14	PRODUCT NO. 219A-04FAR
SCALE 2.5/1	SHEET 1/1	SIZE A4	FILE NAME 219A-04FAR_B_2