

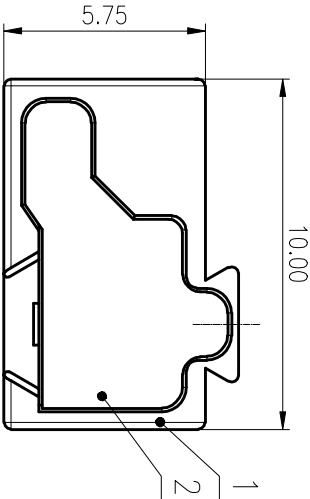
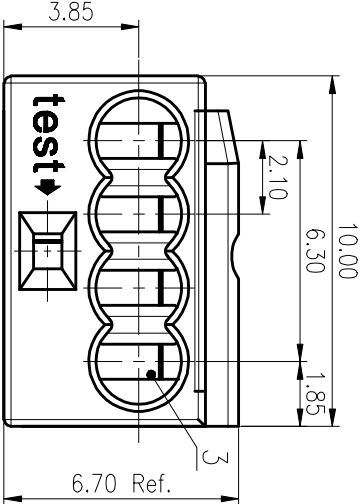
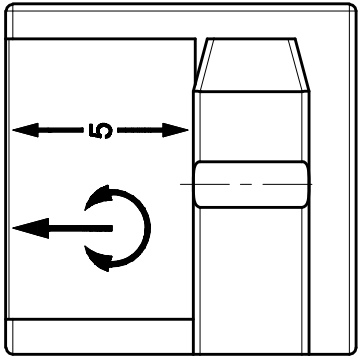


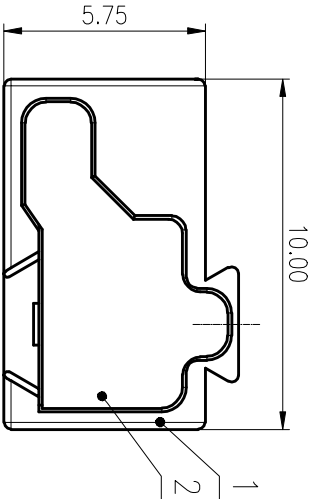

尺寸公差/General tolerances(mm)													0.1/1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	0.1/1/10
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													±Z

3	Current carrier	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

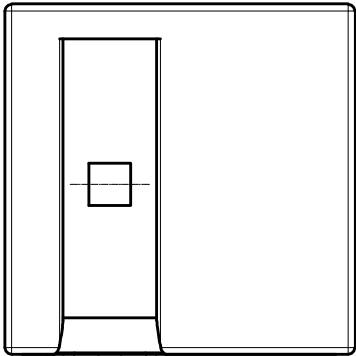

UL 标准/UL Standard:				150			
额定电压/Rated Voltage(V)				150			
IEC 标准/IEC Standard:				150			
过压类别/Overvoltage Category/污染等级				III/3			
额定电压/电压/Rated Voltage(V)/Current(A)				130/13.5			
工频耐压/Withstanding Voltage(V/1min)				AC1250			
螺栓扭矩/Torque Tightening(N·m/Lb·in)				/			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)				0.5~1.0mm ² (Sol)/22~18 AWG(Sol)			
间距/Pitch(mm)/线数范围/Poles				2.1/04P			
剥线长度/Stripping length(mm)				5~6			
使用温度范围/Operating Temperature(°C)				-40~+105			
符合RoHS环保要求/Conform to RoHS				Yes			
标准颜色编号/Standard color number:				/			
PANTONE / RAL				/			

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.05.30		
CHKD:	/		
DRT:	MoEK 2016.06.27		

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 5:1	REV	T1
1	2	3	4	5	6	7	8	9	10