
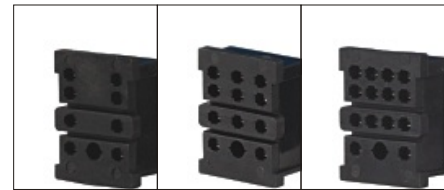


PY-08A

PT-08A



PY-08A

PY-11A

PY-14A



**Specification**

Rated Load	Current / Voltage	A/VAC	10/300
Dielectric Strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2000
External connection wire		AWG/mm <sup>2</sup>	
Screw torque		Nm	
Terminal protection degree			

**Matched relay**

	Metal Clip			
Socket Model	PY-08A	PY-11A	PY-14A	PT-08A
	MY2	My3	MY4	JQX-13F 2Z 10A
Relay Model	55.02		55.04	
	HH52P	HH53P	HH54P	K-35T
	JQX-13F 2Z 5A	JQX-13F 3Z 5A	JQX-13F 4Z 3A	

**Outline dimension, Wiring diagram**

