

# 'GSGB' Ultra Fast Acting HRC Fuse Links

## Specification and List Numbers

## Type 'GSGB' 16-900 Amp

Ultra fast acting fuse links, rated 16 - 900 Amp.

A.C. rating: 660 Volt rms tested to 1000 Volt peak.

D.C. rating: 400 Volt d.c. time constant 20ms (16 - 160 Amp).

350 Volt d.c. time constant 20ms (170 - 900 Amp).

Voltage Rating		Current Rating	List Number	Minimum Pre-Arcing I <sup>2</sup> t	Total I <sup>2</sup> t	Cut-Off Current		Power Dissipation	Top Cap Temp. Rise	Indicator Pack Ref. ‡	Dimensional Reference
Volt a.c. RMS	Volt d.c. @ 20ms	Amp		A <sup>2</sup> sec	@ 100kA 660 Volt RMS A <sup>2</sup> sec	@ 100kA 660 Volt RMS kA	@ in	@ 0.5 in	@ 20°C ambient °C		(Page 1/41)
		16	GSGB16	8	190	1.5	4.7	1.0	35	*	6
		25	GSGB25	23	320	2.0	8.3	1.5	44		
		30	GSGB30	36	450	2.4	9.6	1.7	48		
		35	GSGB35	70	570	2.7	9.3	1.6	48		
		40	GSGB40	110	800	3.2	9.3	1.6	48	GSIPBS	6
		45	GSGB45	140	1,200	3.8	10.8	1.9	50		
		55	GSGB55	205	1,800	3.8	14.7	2.5	58		
	400	63	GSGB63	280	2,400	4.3	16.4	2.6	62		
		80	GSGB80	460	3,500	5.0	23.0	3.6	79		
		75	GSGB75	280	2,100	4.3	23.0	3.7	83		
		85	GSGB85	560	5,100	5.4	20.0	3.4	58		
		110	GSGB110	800	6,600	5.7	30.0	5.2	88	GSIPBS	7
		125	GSGB125	1,100	8,100	6.4	37.0	5.7	88		
		150	GSGB150	1,800	12,500	7.4	39.0	6.3	87		
		160	GSGB160	2,200	17,000	8.0	42.0	6.6	98		
		170	GSGB170	3,200	39,500	9.0	33.0	5.8	63		
		190	GSGB190	4,200	45,500	9.9	43.0	7.3	76		
		225	GSGB225	7,400	80,000	11.8	45.0	7.6	80	GSIPBL	8
		250	GSGB250	11,000	105,000	13.2	46.0	7.8	88		
		175	GSGB175	2,200	40,000	8.0	41.0	7.4	58		
		200	GSGB200	3,200	45,500	9.0	56.0	8.9	63		
		235	GSGB235	5,700	59,000	9.9	54.0	9.0	84		
		300	GSGB300	10,000	120,000	13.2	71.0	11.2	86		
		325	GSGB325	13,000	160,000	14.2	73.0	11.5	87	GSIPBL	9
	350	350	GSGB350	16,500	185,000	15.3	68.0	11.0	90		
		400	GSGB400	23,000	270,000	17.5	83.0	13.2	95		
		450	GSGB450	36,000	340,000	19.0	84.0	13.4	96		
		500	GSGB500	44,000	450,000	22.0	95.0	15.0	104		
		510	GSGB510	40,000	480,000	20.0	98.0	17.0	72		
		580	GSGB580	52,000	570,000	22.0	111.0	20.0	81	NOT AVAILABLE	
		630	GSGB630	66,000	700,000	24.0	117.0	21.0	85	ORDER	10
		710	GSGB710	93,000	1,100,000	28.0	126.0	22.0	92	GISGB	
		800	GSGB800	115,000	1,350,000	30.5	150.0	25.0	102		
		900	GSGB900	170,000	1,800,000	35.0	146.0	26.0	104		

\* Indicator pack should not be used with GSGB16.

‡ Indicated fuse links. "Add-on" indicator fuse link conversion kits comprising a trip indicator fuse link and a pair of easily assembled clips are available.

Figure 6

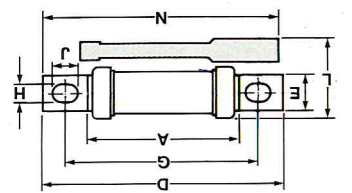


Figure 8

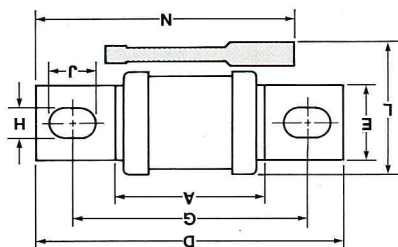


Figure 7

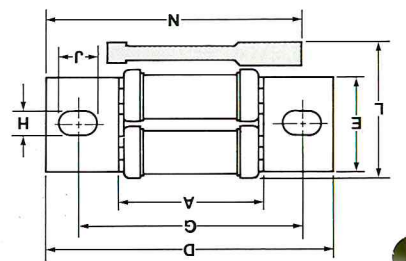


Figure 9


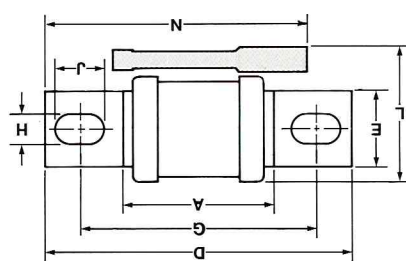


Figure 10

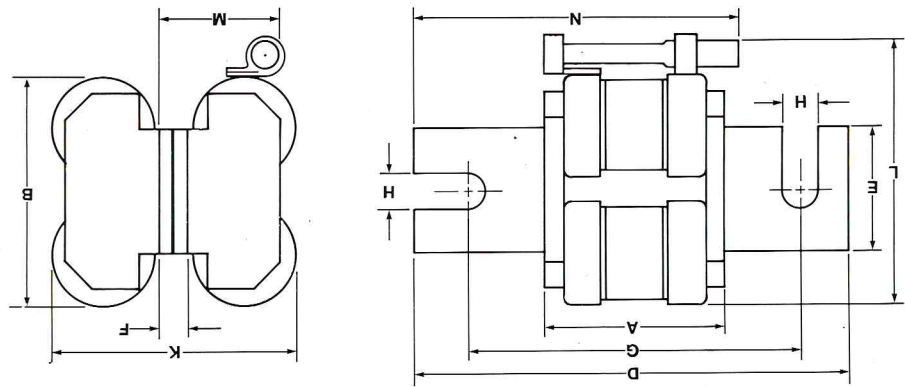

Type	Rating	Fig. No.	Dimensions in millimetres												
	Amp		A	B	D	E	F	G	H	J	K	L	M	N	
GSGB#	16	6	50	17.3	79.5	12	1.6	61.8	6.4	7.9	18.2	-	-	-	
GSGB	25-80	6	50	17.3	79.5	12	1.6	61.8	6.4	7.9	18.2	28.6	24.6	70.4	
	75-160	7	48	35.7	95	31.8	1.6	72	8.3	13.4	19	46.4	23.8	80.2	
	170-250	8	55	34.6	107	25.4	3.2	81.7	10.3	15.5	38.8	45.3	35.2	84.1	
	175-500	9	55	34.6	107	25.4	6.4	81.7	10.3	15.5	77.6	45.3	38.4	84.1	
*GSGB	510-900	10	57.2	73.8	143	39.7	9.6	110	11.5	-	80.8	84.5	40.8	102	

Note: Add-on indicator fuse link shown shaded.

\* Add-on indicator fuse link conversion kits are not available for this range of fuse links. For indicated version order as G/SGB/---. # Indicator not available on this size.