


# SAVIOR AC AXIAL FAN

## SA12738


127x127x38mm

### DESIGN FEATURES


- \***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- \***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- \***HOUSING:** DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- \***MOTOR:** SHADED POLE, IMPEDANCE PROTECTED
- \***CONNECTING:** TERMINAL & WIRE LEADS
- \***SPEED:** H-HIGH SPEED TYPE  
M-MEDIUM SPEED TYPE  
L-LOW SPEED TYPE
- \***OTHER VOLTAGE:** 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE

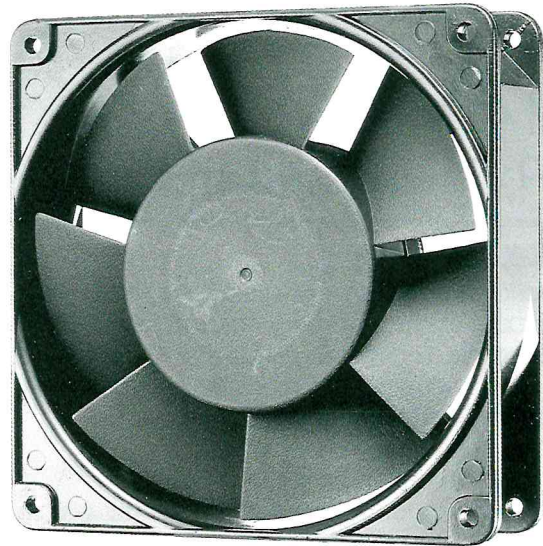

### DIMENSIONS:MM

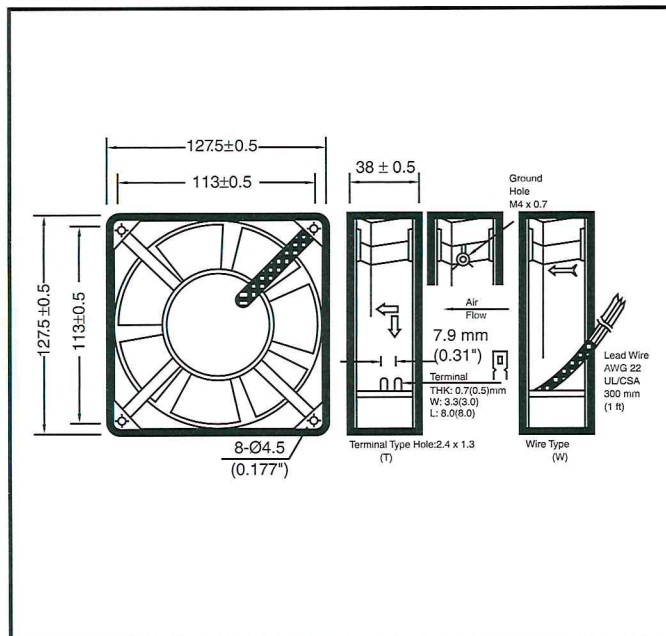

### PERFORMANCE

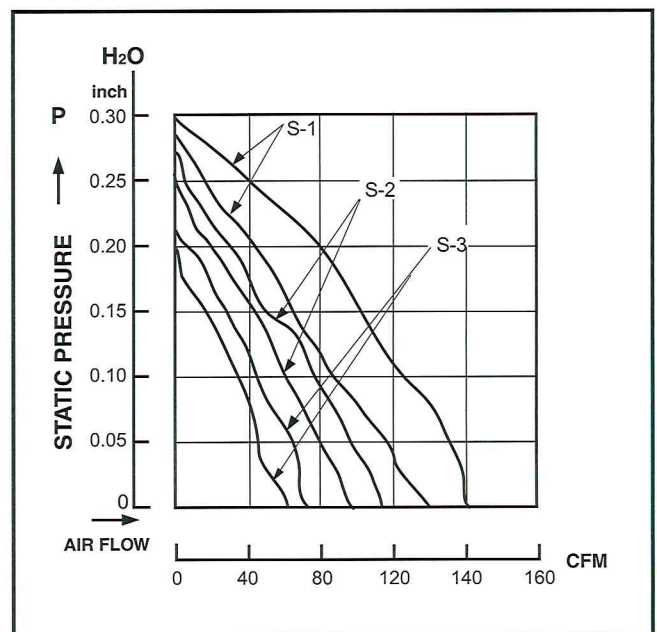

### SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M <sup>3</sup> /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOISE (dBA)
SA12738H	110/120	50/60	115/140	3.30/4.00	0.26/0.24	24/23	2700/3000	0.28/0.30	44/47
SA12738H	220/240	50/60	115/140	3.30/4.00	0.16/0.14	24/23	2700/3000	0.28/0.30	44/47
SA12738M	110/120	50/60	85/105	2.40/3.00	0.16/0.14	20/19	2200/2500	0.26/0.27	39/40
SA12738M	220/240	50/60	85/105	2.40/3.00	0.14/0.12	20/19	2200/2500	0.26/0.27	39/40
SA12738L	110/120	50/60	72/80	2.00/2.30	0.14/0.12	14/12	1800/2100	0.20/0.21	32/36
SA12738L	220/240	50/60	72/78	2.00/2.30	0.12/0.10	11/10	1800/2100	0.20/0.21	32/36