


SAVIOR DC BRUSHLESS FAN

SD06025


60x60x25.4mm

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** H-HIGH SPEED TYPE
M-MEDIUM SPEED TYPE
L-LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**

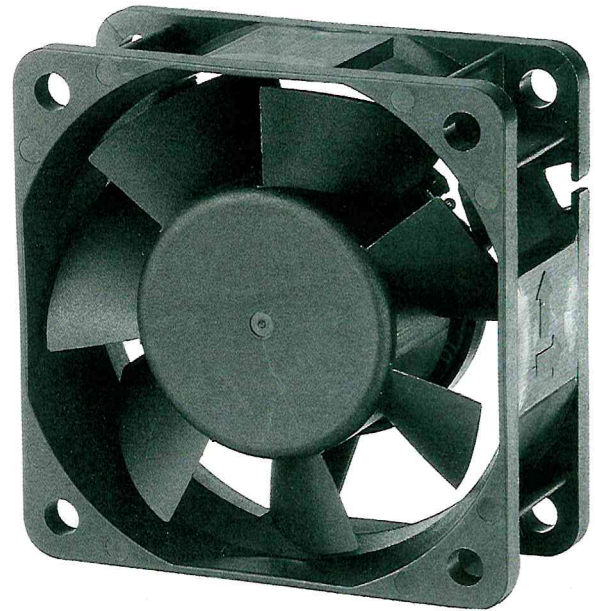

DIMENSIONS:MM

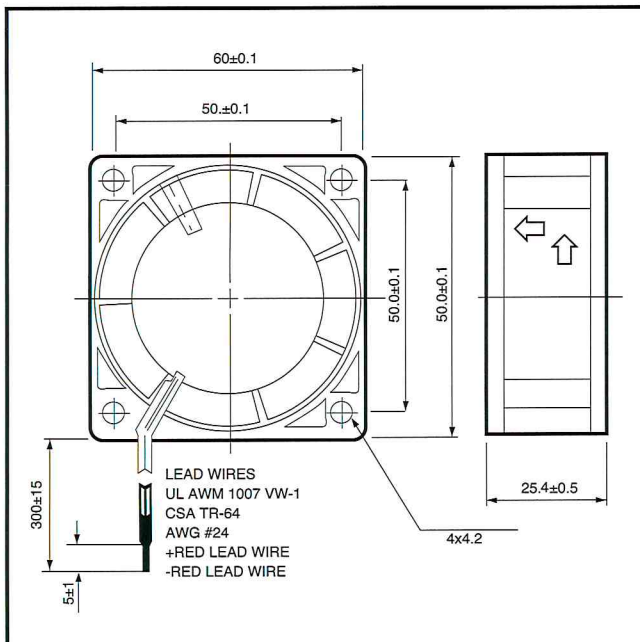

PERFORMANCE

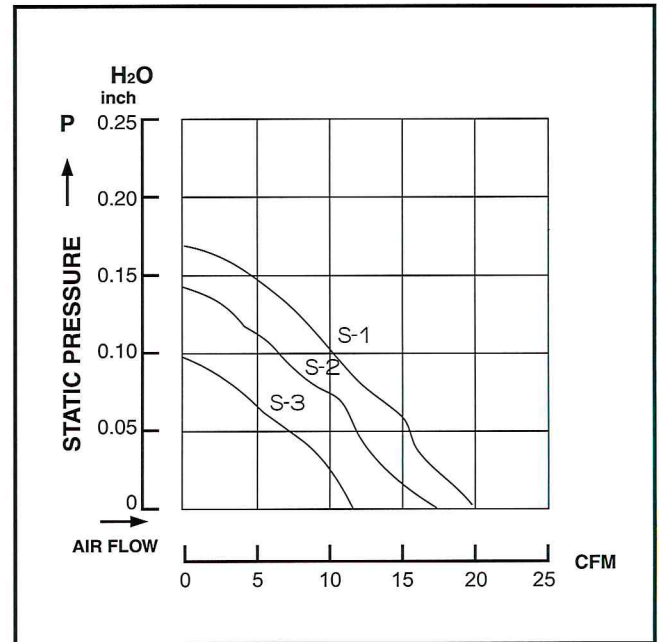

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
SD06025H	5	20.0	0.57	0.33	1.65	4000	0.17	30
	12	20.0	0.57	0.13	1.56	4000	0.17	30
	24	20.0	0.57	0.12	2.88	4000	0.17	30
SD06025M	12	15.5	0.44	0.11	1.32	3200	0.14	25
	24	15.5	0.44	0.10	2.40	3200	0.14	25
SD06025L	12	12.7	0.36	0.09	1.08	2900	0.10	22
	24	12.7	0.36	0.08	1.92	2900	0.10	22