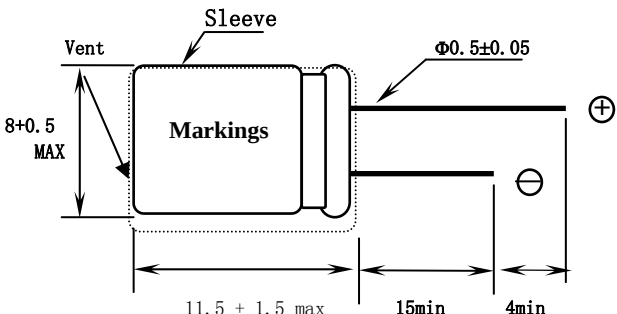
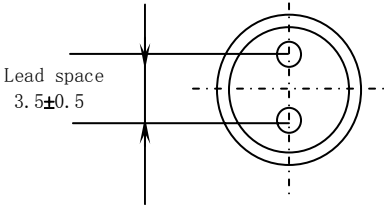


Aluminum Electrolytic Capacitor Specification

Series	KLH	35 V 100 μ F	Part No.	KLH-035V101MF115-T/A5.0
Customer No.	/		Case size	Φ D 8 X L 11.5
Specification	Items		Standard	
	Operating temperature range		- 40 ~ + 105 $^{\circ}$ C	
	Capacitance tolerance		$\pm$ 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.12 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 35 μ A (20 $^{\circ}$ C 35 V 2 min)	
	Impedance (MAX)		0.19 Ω (100KHZ, 20 $^{\circ}$ C)	
	Ripple current (MAX)		380mA _{rms} (100KHz , 105 $^{\circ}$ C)	
	Load life		3000 hrs	
Outline	Sleeve color		Deep Green	
	Marking color		White	
	(Dimensions)			
	Copper clad steel wire(tinned)  Flat Rubber  [Remarks:Taping space:5.0(+0.8-0.2)] (unit):mm			
Recorder	(The first edition) : 2016-10-31			
Wrote by: LUOLI		Checked by: DINGCHANGHUA		Approved by: SHENZHIHONG