


### Features

- 30A carrying current
- SPST-NO& SPDT
- PCB

### PCB Relay

JQX-15F(T90)  DC24V

Coil Voltage : 5,6,9,12,24,48,110VDC  
 Contact Ratings : 1H,1D,1Z 无 NIL: 1C  
 Relay type

### Contact Ratings

Contact Ratings	1H 1D 1Z
Contact Resistance	100mΩ (at 1A 6VDC)
Contact Material	Silver Alloy
Contact capacity	1H:30A 240VAC/28VDC 1D:15A 240VAC/28VDC 1Z: 20A 240VAC/28VDC 40A 240VAC/28VDC

### Specification

Insulation Resistance	100MΩ .500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 1500V 1 min
Operate Time	15ms/10ms
Terminal Type	PCB

### Coil Ratings

Nominal Coil Power	0.9W
--------------------	------


### Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C ± 10%	Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.9W			
5	28	3.75	0.5	6.5
6	40	4.50	0.6	7.8
9	90	6.75	0.9	11.7
12	160	9.00	1.2	15.6
24	640	18.00	2.4	31.2
48	2560	36.00	4.8	62.4
110	13450	82.50	11.0	143.0



JQX-15F(T90)-24V30A

### Dimension.Bottom View

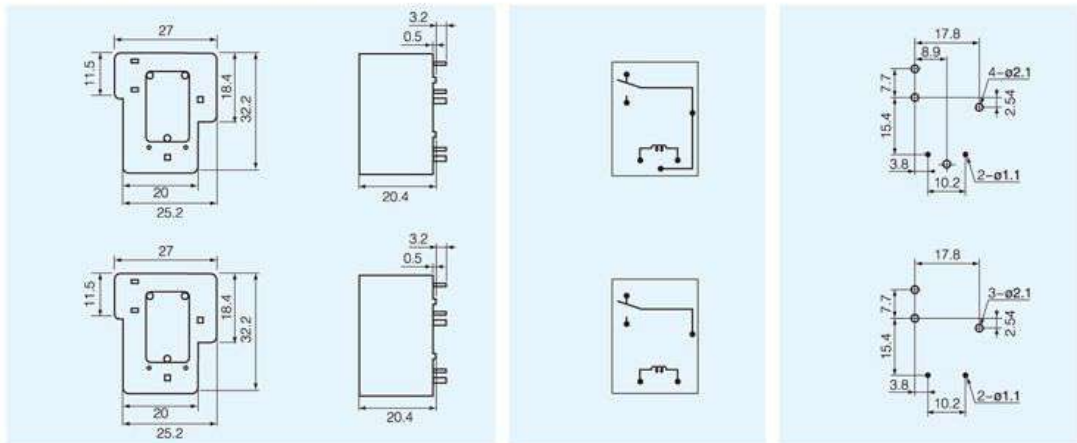

### Reference Data

