


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



LQ

Low Imp., High Ripple Current Series

Low Impedance
 Miniaturized
 Solvent Proof




- For LED Lighting
- High reliability withstanding 10000 hours load life at 105°C (6000 ~ 9000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive, Halogen-Free

Item	Characteristics																			
Operating temperature range	-40 ~ +105°C																			
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)																			
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C																			
Dissipation factor max. (at 120Hz, 20 C)	Capacitance > 1000 μF : $\tan\delta$ increases by 0.02 for each 1000 μF from below value.																			
	<table border="1"> <tr> <td>WV</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>$\tan\delta$</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.08</td> </tr> </table>	WV	6.3	10	16	25	35	50	63	80	100	$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
WV	6.3	10	16	25	35	50	63	80	100											
$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08											
Low temperature characteristics (Impedance ratio at 120Hz)	Z-25°C / Z+20°C	2																		
	Z-40°C / Z+20°C	3																		
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.																			
	Rated voltage (Vdc)	6.3 ~ 10	16 ~ 100																	
	Capacitance change	Within $\pm 30\%$ of initial value	Within $\pm 25\%$ of initial value																	
	$\tan\delta$	Less than 200% of specified value																		
	Leakage current	Less than specified value																		
	$\varnothing D$	Life time (hrs)																		
			6.3Vdc	10~50Vdc	63~100Vdc															
$\varnothing 5 \sim \varnothing 6.3$		6000	7000	6000																
$\varnothing 8 \times 11.5L$		8000	9000	8000																
$\varnothing 8 \times 15L \sim 20L$		9000	10000	9000																
$\varnothing 10 \times 12.5L$	9000																			
$\varnothing 10 \times 16L \sim 25L$	10000																			
$\varnothing 12.5 \sim$	10000																			
Shelf life (at 105 C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C 6305 clause 5.4.																			

● DRAWING

Unit : mm

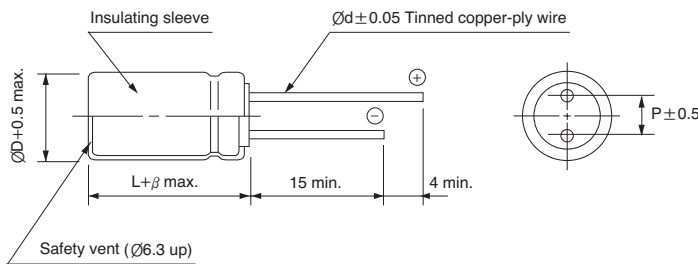

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
	1.5			2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
~ 33	0.42	0.70	0.90	0.95	1.00
47 ~ 270	0.50	0.73	0.92	0.96	1.00
330 ~ 680	0.55	0.77	0.94	0.97	1.00
820 ~ 1800	0.60	0.80	0.96	0.98	1.00
2200 ~	0.70	0.85	0.98	0.99	1.00

MINIATURE TYPES

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LQ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25			35		
	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz
47													5×11	0.400	450
68										5×11	0.400	450			
100										5×11	0.400	450	6.3×11	0.170	700
120							5×11	0.400	450						
150				5×11	0.400	450				6.3×11	0.170	700			
180													8×11.5	0.075	1200
220	5×11	0.400	345										8×15	0.059	1600
270							6.3×11	0.170	700				10×12.5	0.053	1700
330				5×11	0.170	700				8×11.5	0.075	1200	8×20	0.041	1960
390										8×15	0.059	1600	10×16	0.038	2000
470	6.3×11	0.170	540				8×11.5	0.075	1200	10×12.5	0.053	1700	10×16	0.038	2100
560				8×11.5	0.075	1200	8×15	0.059	1600	8×20	0.041	1960	10×20	0.028	2500
680				8×15	0.059	1600	10×12.5	0.053	1700	10×16	0.036	2000	10×25	0.024	2900
820	8×11.5	0.075	945	10×12.5	0.053	1700	8×20	0.041	1960				12.5×20	0.025	2600
1000	8×15	0.059	1250	10×16	0.041	1960	10×16	0.036	2000	10×20	0.027	2500	12.5×20	0.025	2800
1200	10×12.5	0.053	1500	10×16	0.036	2000				10×25	0.023	2900	12.5×25	0.019	3200
1500	8×20	0.041	1500				10×20	0.027	2500	12.5×20	0.024	2600	12.5×30	0.018	3660
										16×20	0.021	3330	16×20	0.021	3330
1800	10×16	0.036	1760	10×20	0.027	2500	10×25	0.023	2900	12.5×25	0.018	3200	12.5×34.5	0.016	4120
										16×25	0.017	3810	16×25	0.017	3810
2200				10×25	0.023	2900	12.5×20	0.024	2600	12.5×30	0.017	3660			
2700	10×20	0.027	1960	10×20	0.024	2600	12.5×25	0.018	3200	12.5×34.5	0.015	4120			
3300	10×25	0.023	2250	12.5×25	0.018	3200	12.5×30	0.017	3660						
3900	12.5×20	0.024	2480				16×20	0.020	3300	16×25	0.016	3810			
4700	12.5×25	0.018	2900	12.5×34.5	0.015	4120									
				12.5×20	0.018	3660	16×25	0.016	3810						
				16×25	0.016	3300									
				16×25	0.021	4120									
				16×25	0.017	3810									
5600	12.5×30	0.017	3450												
				12.5×34.5	0.015	3570									
6800	16×20	0.020	3250												
8200	16×25	0.016	3630												

WV Item μF	50			63			80			100		
	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD×L (mm)	IMP. (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz
8.2										5×11	1.200	220
12							5×11	1.200	220			
18										6.3×11	0.460	370
27	5×11	0.480	310	5×11	0.710	240	6.3×11	0.460	370			
33										8×11.5	0.450	620
47	6.3×11	0.380	400	6.3×11	0.280	420	8×11.5	0.290	620	8×15	0.350	780
56	6.3×11	0.220	500				10×12.5	0.250	780	10×12.5	0.250	780
68							8×15	0.200	780			
82							8×20	0.200	780	8×20	0.250	1040
							10×12.5	0.170	780	10×16	0.105	1040
100	8×11.5	0.120	950	8×15	0.130	990	10×16	0.110	1040	10×16	0.105	1140
120	8×15	0.082	1230	10×12.5	0.110	990				10×20	0.080	1430
							12.5×16	0.105	1430	12.5×16	0.105	1430
150	10×12.5	0.073	1280	8×20	0.096	1200	10×20	0.084	1430	10×25	0.066	1620
							12.5×20	0.066	1620	12.5×20	0.650	1750
180	8×20	0.058	1580	10×16	0.076	1200	12.5×16	0.110	1430			
220	10×16	0.050	1650				10×25	0.069	1620	12.5×25	0.045	2210
							12.5×20	0.062	1750	12.5×30	0.040	2400
270				10×20	0.056	1570	12.5×25	0.047	2210	16×20	0.046	1950
							12.5×30	0.042	2400			
330	10×20	0.036	2060	10×25	0.046	1990	16×20	0.048	1950	12.5×34.5	0.034	2600
										12.5×40	0.030	2860
390	10×25	0.030	2240	12.5×20	0.041	1990	12.5×34.5	0.036	2600	16×25	0.036	2430
										18×20	0.045	2270
470	12.5×20	0.030	2300	12.5×25	0.031	2460	12.5×40	0.032	2860	16×31.5	0.030	2640
							16×25	0.038	2430			
							18×20	0.045	2270	18×25	0.034	2500
560				12.5×30	0.028	2760				16×35.5	0.028	2860
				16×20	0.032	2380	16×31.5	0.032	2640	18×31.5	0.029	2860
680	12.5×25	0.024	2800	12.5×34.5	0.024	3040	16×35.5	0.029	2860	16×40	0.026	3510
							18×25	0.036	2500	18×35.5	0.026	3510
820	12.5×30	0.022	3370				16×40	0.027	3510			
	16×20	0.025	3070	16×25	0.025	2890	18×31.5	0.030	2860	18×40	0.025	3860
1000	12.5×34.5	0.020	3810	16×31.5	0.023	2950						
	16×25	0.021	3510				18×35.5	0.027	3510			
1200							18×40	0.026	3860			
2200				18×40	0.02	3200						