
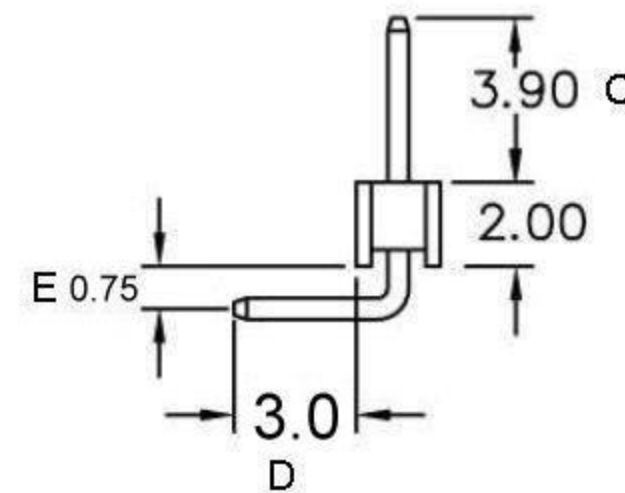


MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass


SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

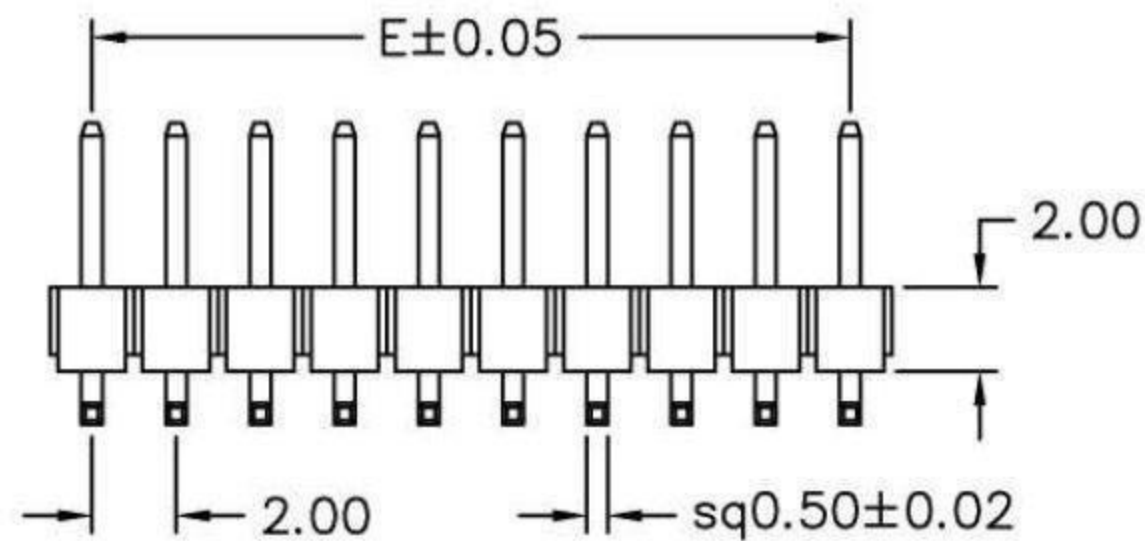

C= 3.9 mm D= 3.0 mm E= 0.75 mm

POLES	DIM E	POLES	DIM E
		21	40.00
2	2.00	22	42.00
3	4.00	23	44.00
4	6.00	24	46.00
5	8.00	25	48.00
6	10.00	26	50.00
7	12.00	27	52.00
8	14.00	28	54.00
9	16.00	29	56.00
10	18.00	30	58.00
11	20.00	31	60.00
12	22.00	32	62.00
13	24.00	33	64.00
14	26.00	34	66.00
15	28.00	35	68.00
16	30.00	36	70.00
17	32.00	37	72.00
18	34.00	38	74.00
19	36.00	39	76.00
20	38.00	40	78.00

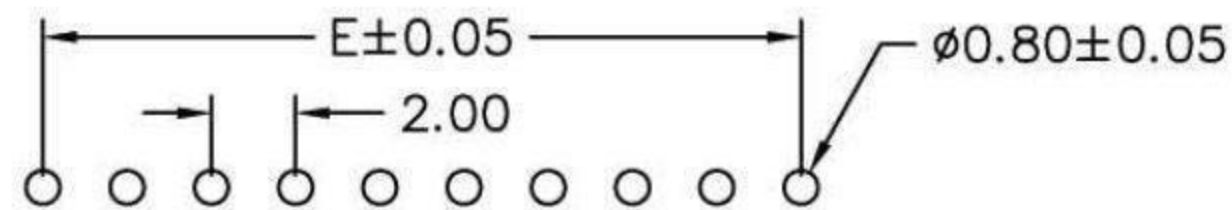

Recommended P.C.B Layout

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.30 .00 ±0.20 ANG. ±3°	PART NAME 品名 2.0mm PIN HEADER SINGLE ROW 1XXXP RIGHT ANGLE TYPE H=2.0mm (C=3.9mm D=3.0mm E=0.75mm)ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	
DATE 制表日 2012/08/17	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C6100-XXARXAR0R