
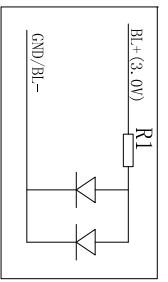


REV.	CHANGE CONTENT	BY	DATE
B	按客户要求修改接口端子排，增加防呆键，同时增加按键并视功能，SMT贴片	HYQ	15.1.20

PIN NO.	SYMBOL
1	GND/BL-
2	VDD
3	SI
4	SCL
5	A0
6	/RES
7	/CS1
8	BL+
9	A
10	B

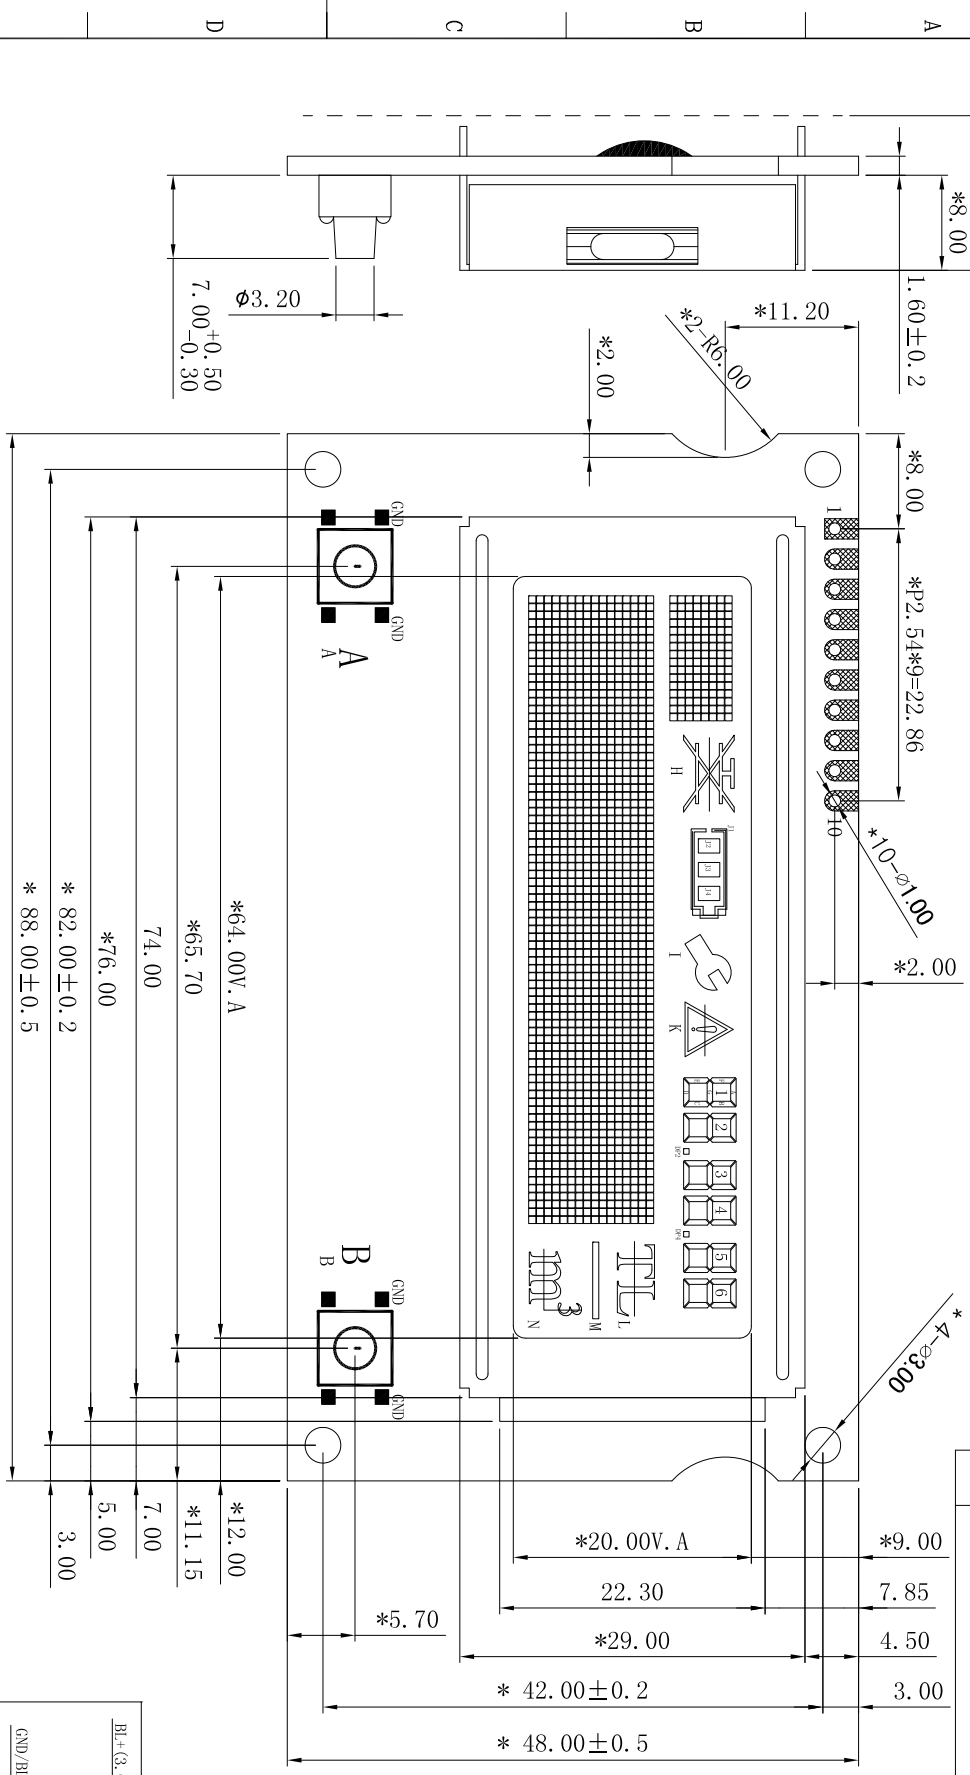



BACKLIGHT CIRCUIT

- NOTES:
1. Display Mode: STN POSITIVE Y/G TRANSPARENT
 2. Viewing Direction: 6 0'Clock
 3. Driving Method: 1/17 DUTY, 1/5 BIAS, VDD=3.0V, Vop=5.0V
 4. Backlight: LED, Color-Y/G, VBI=3.0V, IBL≤40mA (TYP 30mA)
 5. Operating Temp: -20° C--+70° C
 6. Storage Temp: -30° C--+80° C
 7. DRIVE IC: ST7522D
 8. UNMARK TOLERANCE IS : ±0.3mm
 9. () Reference dimension, * Important dimensions
 10. RofHS

北京海迅华田电子有限公司

DESIGN	LGH	14.11.19	REV. : B	SCALE : 1 : 1
CHECKED	HWQ	14.11.19	DRAWING TITLE : LCM	UNTT : mm
APPROVED	WYR	14.11.19	FILE NO. :	SHEET : 1/1
			DRAWING No. : H500A78C-YF62L-VA	

REV.	CHANGE CONTENT	BY	DATE

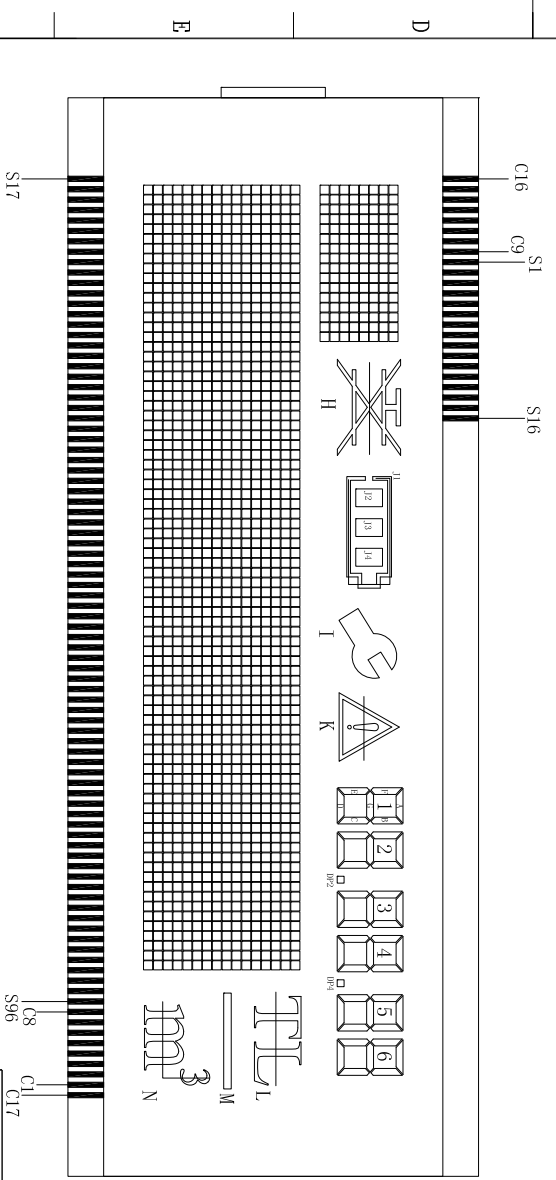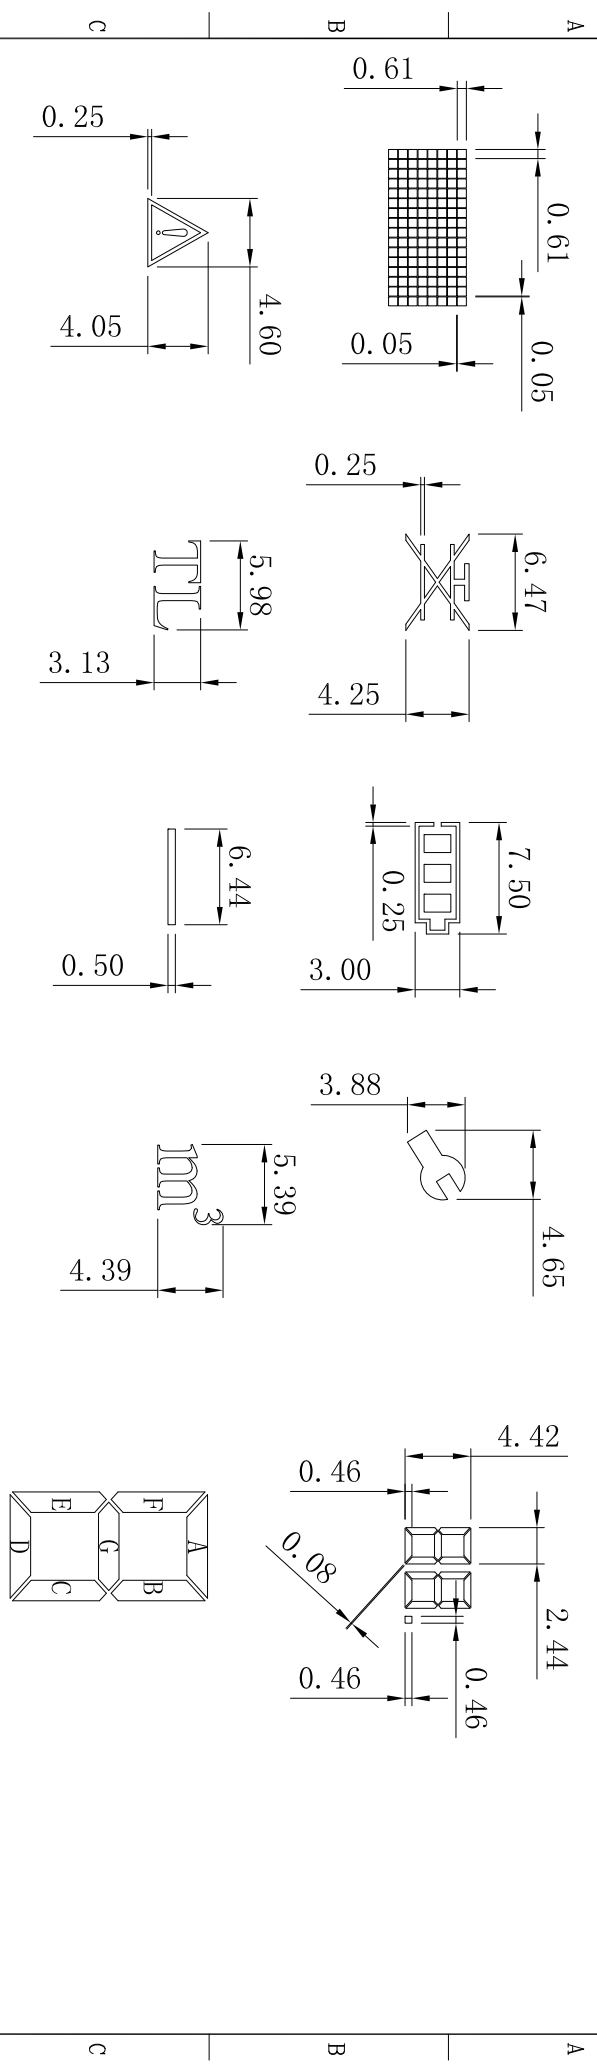

FROM	11	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
TO	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50		

北京海迅华田电子有限公司


DESIGN	LGH	14.11.19	REV. : B	SCALE : 1 : 1
CHECKED	HWQ	14.11.19	PROJECTION:	UNIT : mm
APPROVED	WYR	14.11.19	PROJECT :	SHEET : 1/1

DRAWING No. : H500A78C-YF62L-VA
DRAWING TITLE : 真值表
FILE NO. :

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

REV.	CHANGE CONTENT	BY	DATE

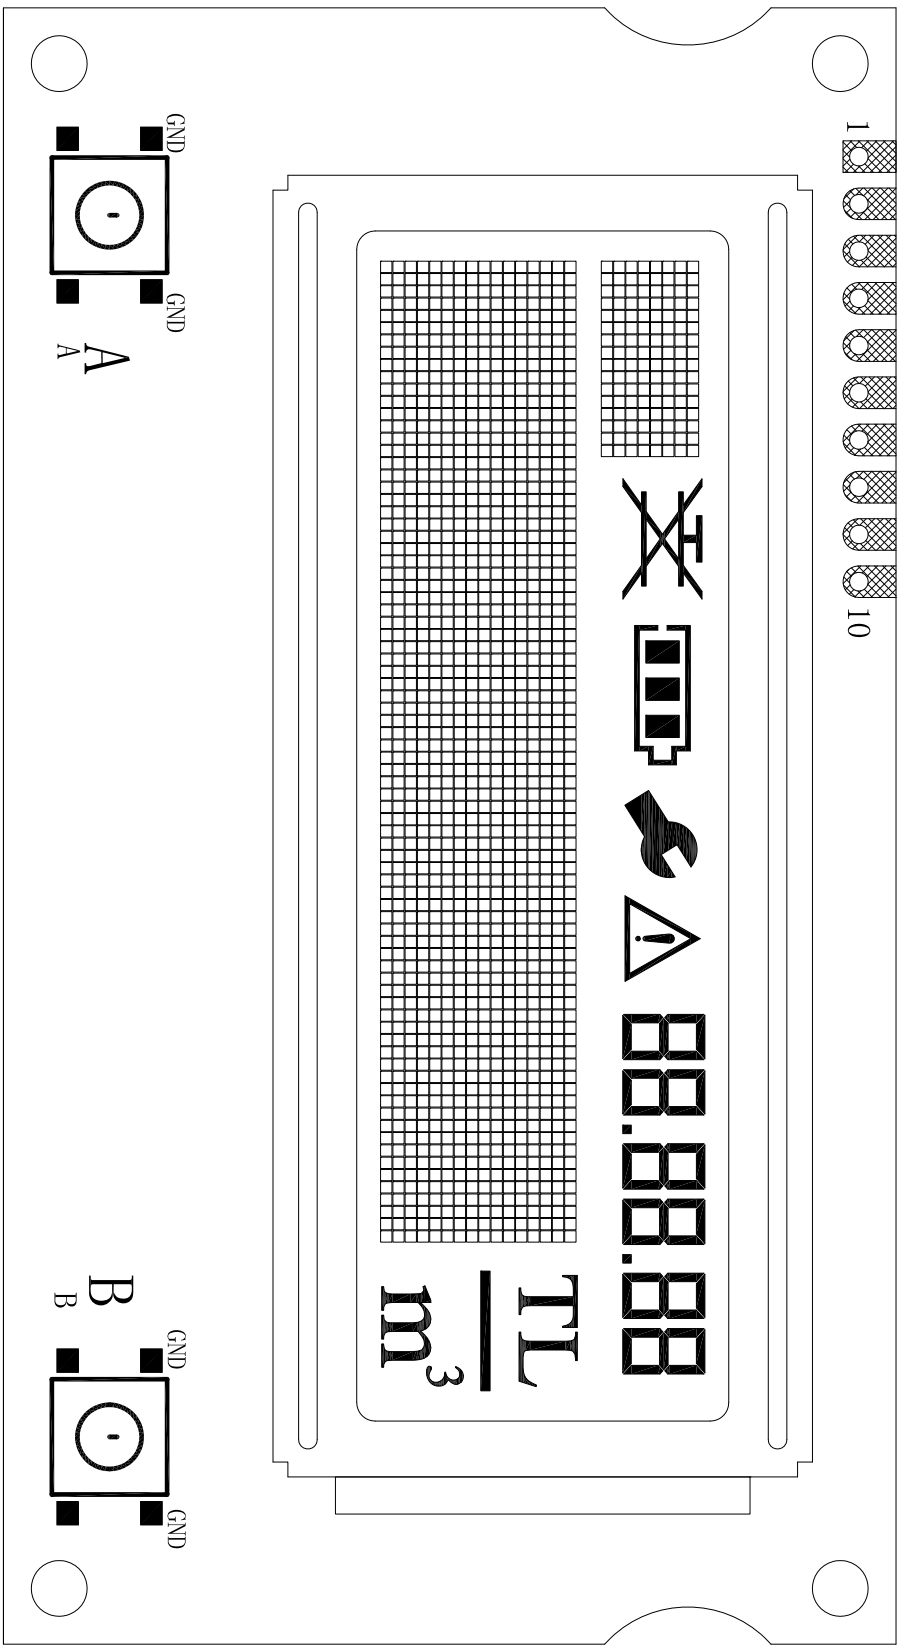

北京海迅华田电子有限公司

DESIGN	LGH	14.11.19	REV. : B	SCALE : 1 : 1
CHECKED	HWQ	14.11.19	PROJECTION:	UNIT : mm
APPROVED	WYR	14.11.19		SHEET : 1/1

DRAWING No. :HS00A78C-YF62L-VA
DRAWING TITLE : 全显图
FILE NO. :

F F

E E

D D

C C

B B

A A

1 2 3 4 5 6 7 8