

Dimension


Position	A	B	C	E	F
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41
78	54.30	61.00	67.04	52.34	2.41

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/31/08'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- RESISTANCE TO SOLDERING HEAT: 260±5°C 5±0.5s.
- PRODUCT NUMBER CODE:

DS1077-01-	X	X	X	X	X	X	X	
								SCREW DIM. A
								X: W/O Screw
								4: 4.80
								5: 5.80
								SCREW TYPE
								X: W/O Fork
								3: BR TYPE
								4: BRJ TYPE (W/O washer)
								7: BRJ TYPE (W/ washer)
								SHELL PLATING
								T:FORNT & BACK SHELL TIN
								N:FORNT SHELL NICKEL,BACK SHELL TIN
								CONTACT PLATING
								8: FULL GOLD FLASH
								0: SELECTIVE GOLD FLASH
								HOUSING COLOR
								B:BLACK
								W:WHITE
								U:BLUE
								CONNECTOR TYPE
								M:MALE
								F:FEMALE
								No.OF CONTACTS
								15 26 44 62 78

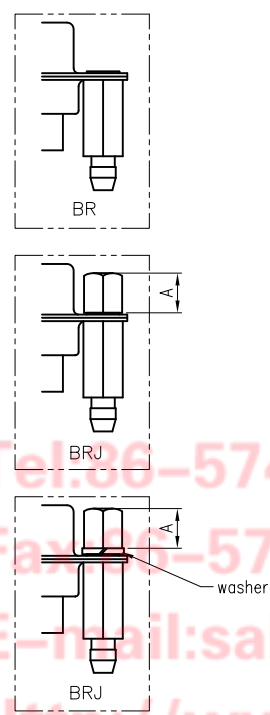

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°			D-SUB H.D DIP TYPE	
.X	±0.38	.X	±3°	mm		PROFILE HEIGHT=10.0mm	
.XX	±0.25	.XX	±2°	A4		SERIES DS1077-01 SERIES	
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		SHEET					
DRAWING NO.		1 OF 1					
		C-DS177-01-XXXXXX					