1.27mm pitch female header SMT
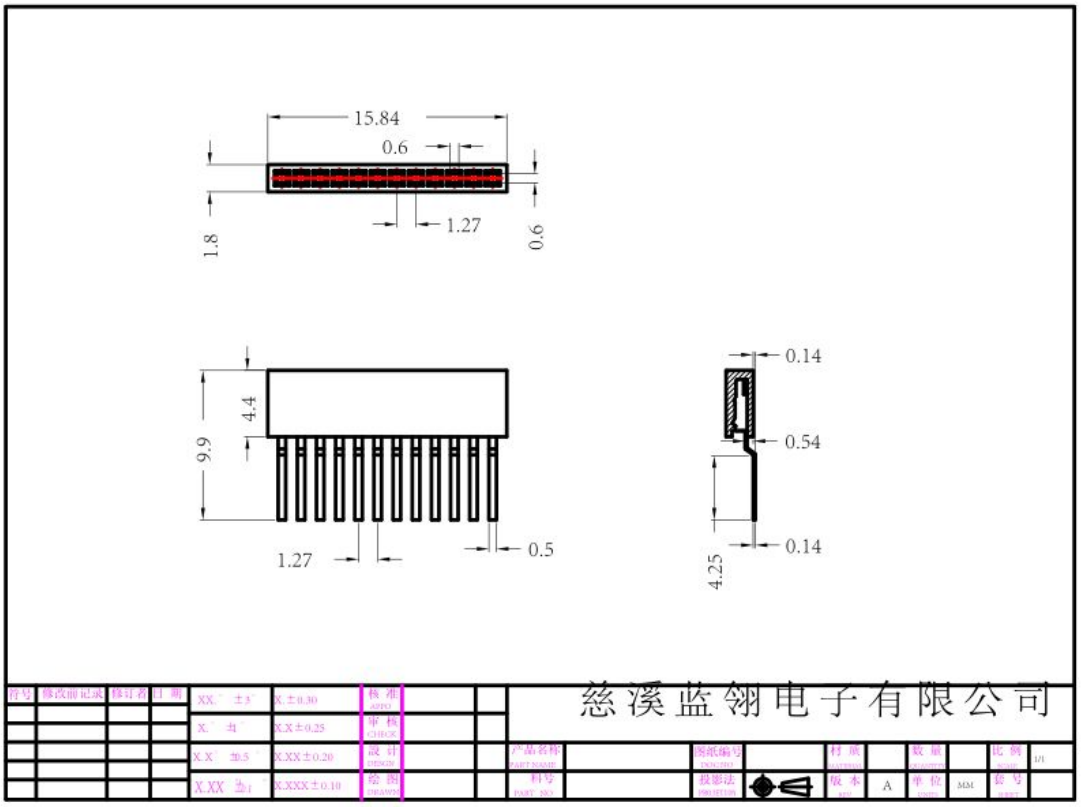
1. Material
   1.1 Contact material: Phosphor bronze
   1.2 Contact plating: Gold plating
   1.3 Insulator: Glass filled polyester(UL94V-0)
2. Specifications:
   2.1 Current rating: 1A
   2.2 Insulator resistance: 500mΩ min
   2.3 Dielectric withstanding: 300VAC
   2.4 Contact resistance: 20mΩ
   2.5 Operating temperature: -40℃~+105℃