

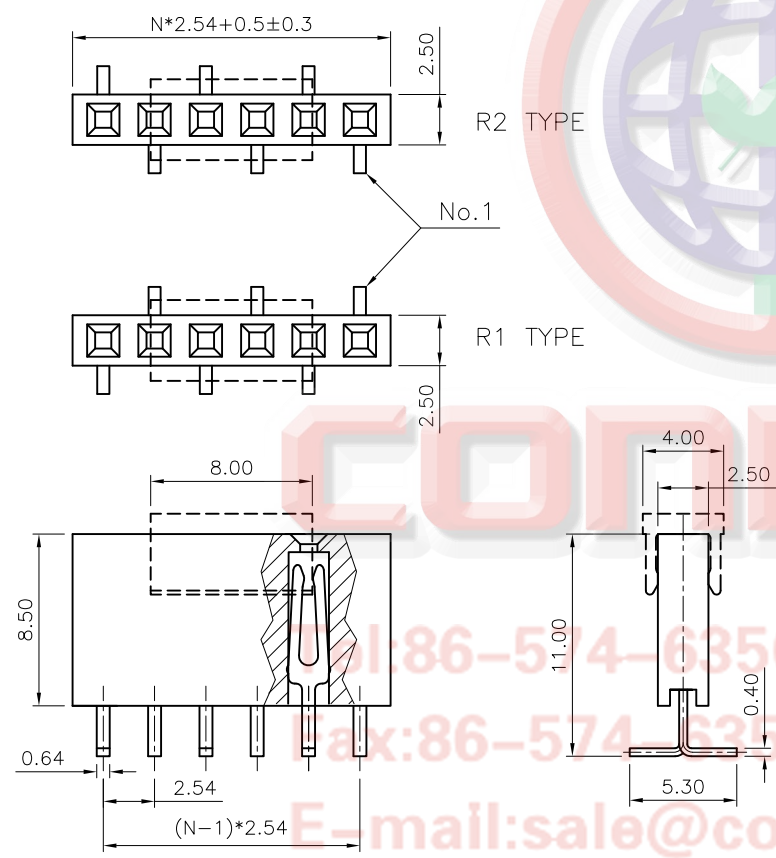


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'	~	

- NOTES:
- MATERIAL
    - INSULATOR: HIGH TEMP,THERMOPLASTIC(UL 94V-0).
    - CONTACT MATERIAL: COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING: 3.0 Amp.
    - INSULATION RESISTANCE: 1000MΩ Min.
    - DIELECTRIC WITHSTANDING: 500VAC.
    - CONTACT RESISTANCE: 20mΩ Max.
    - OPERATING TEMPERATURE: -40°C TO +105°C.
  - PRODUCT NUMBER CODE:  
DS1023-29 - X X X X X X X

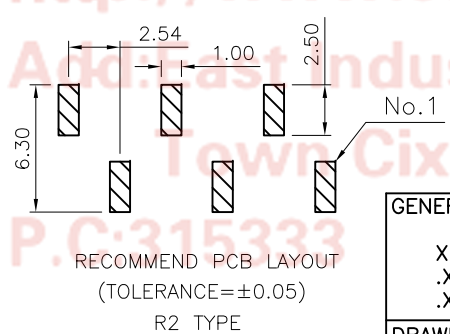

- POST SUPPORT  
S: W/ POST  
X: W/O POST
- PACKING TYPE  
T: TRAY  
R: TAPE ON REEL  
B: TUBE  
PICK UP SUPPORT  
S:W/ PICK UP  
X:W/O PICK UP
- BEND TYPE  
1:R1 TYPE  
2:R2 TYPE
- CONTACT PLATING  
8: FULL GOLD FLASH
- HOUSING COLOR  
B:BLACK
- No.OF CONTACTS  
1\*2-1\*40

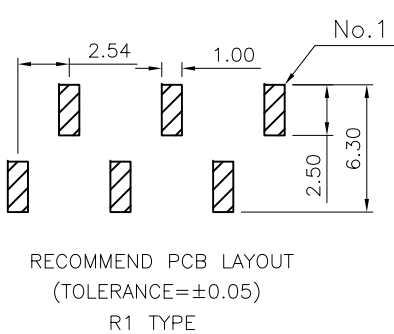

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-29-XXXXXXX-A		

PROJECTION	TITLE
UNITS	2.54mm Female Header Single Row SMT Type H=8.5mm
SHEET SIZE	SERIES DS1023-29 SERIES

**CONNFLY** 晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD

TEL: 86-574-63508787  
FAX: 86-574-63510817  
E-mail: sale@connfly.com  
http://www.connfly.com  
Add: East Industry Zone KuangYan  
Town Cixi Ningbo China  
P.C: 315333