

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6414

BDS 25 VC 470 (M)

SERIES

BDS



RATING

25 V 470 μ F


CASE SIZE

 $\varnothing 10 \times 10L$


A. DIAGRAM OF DIMENSION

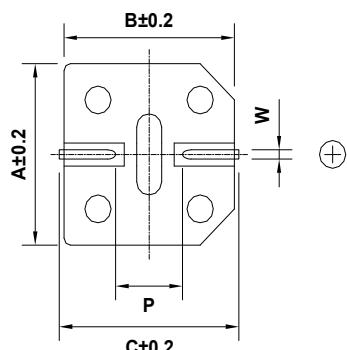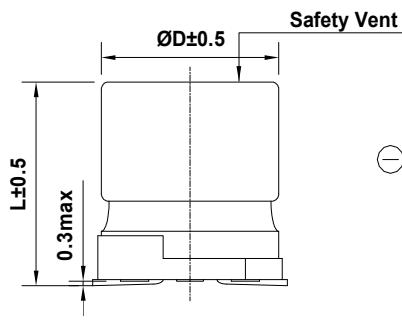

Recommended Solder land on PC board



: Solder land on PC board

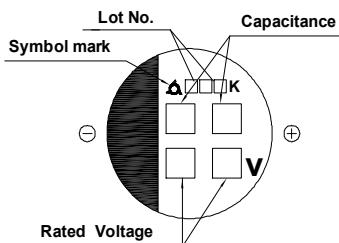

Case code	ØD	L	A	B	C	W	P	a	b	c
J10	10	10	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	2.2

B. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105 °C
- B. RATED VOLTAGE : 25 V_{DC}
- C. SURGE VOLTAGE : 32 V_{DC}
- D. CAPACITANCE TOLERANCE : ± 20% at 20 °C, 120Hz
- E. LEAKAGE CURRENT : Lower 117.5 μ A, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TAN δ) : Lower 0.16 at 20 °C, 120Hz
- G. MAX. RIPPLE CURRENT : 460 mArms at 105 °C, 120Hz
- H. TEMPERATURE CHARACTERISTIC :
(Max. Impedance ratio) Z(-25 °C) / Z(20 °C) = 2
Z(-40 °C) / Z(20 °C) = 4 (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage is applied for 2,000 hours at 105 °C.

- # Capacitance change ≤ ±20 % of the initial value
- # Tan δ ≤ 200 % of the initial specified value
- # Leakage Current ≤ The initial specified value


J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

- # Capacitance change ≤ ±20 % of the initial value
- # Tan δ ≤ 200 % of the initial specified value
- # Leakage Current ≤ The initial specified value

K. CLEANING CONDITIONS : Solvent-proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

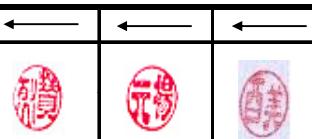

Sam Young Electronics Co., Ltd.