


APPROVAL NO.
6453

ALUMINUM ELECTROLYTIC CAPACITORS

BDA 16 VC 47 (M)

SERIES	BDA
RATING	16 V 47 μ F
CASE SIZE	\varnothing 6.3 x 5.2L

A. DIAGRAM OF DIMENSION

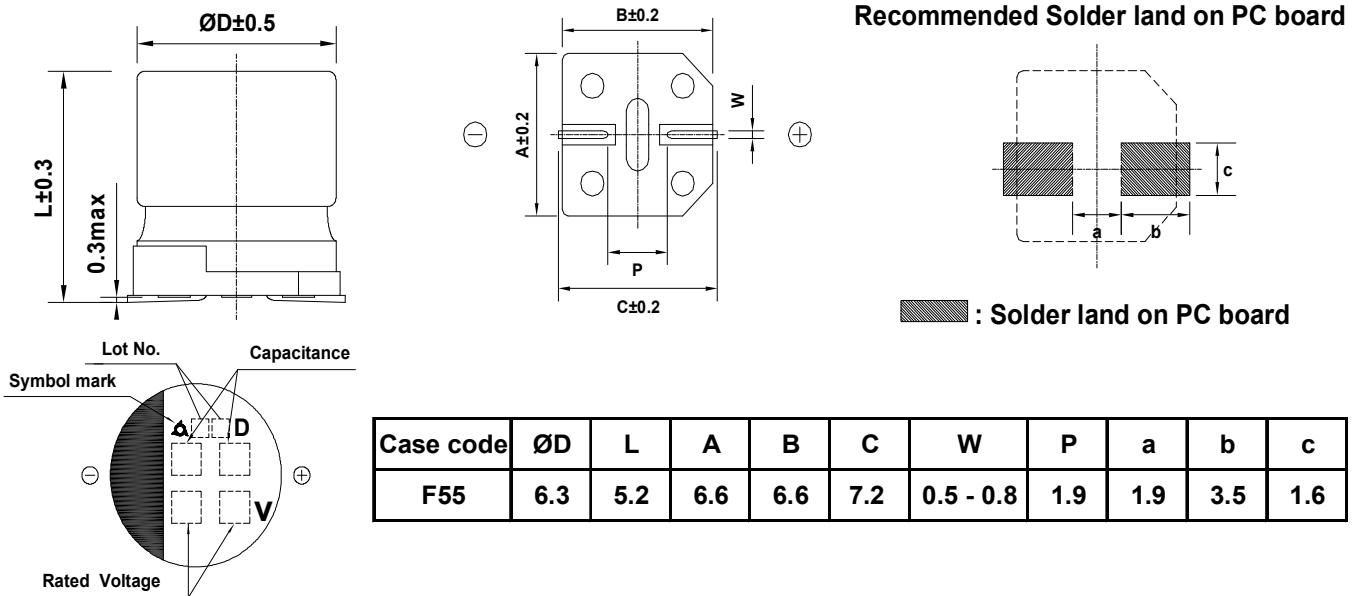

B. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105°C
- B. RATED VOLTAGE : 16 V_{DC}
- C. SURGE VOLTAGE : 20 V_{DC}
- D. CAPACITANCE TOLERANCE : ± 20% at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower 7.52 μ A, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TANδ) : Lower 0.20 at 20°C, 120Hz
- G. MAX. RIPPLE CURRENT : 48 mArms at 105°C, 120 Hz
- H. TEMPERATURE CHARACTERISTIC :
- * Max.Impedance ratio $Z(-25^\circ\text{C}) / Z(20^\circ\text{C}) = \frac{2}{1}$
 $Z(-40^\circ\text{C}) / Z(20^\circ\text{C}) = \frac{4}{1}$ (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2000 hours at 105°C.

- # Capacitance change $\leq \pm 25\%$ of the initial value
- # Tanδ $\leq 200\%$ of the initial specified value
- # Leakage Current \leq The initial specified value


J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

- # Capacitance change $\leq \pm 25\%$ of the initial value
- # Tanδ $\leq 200\%$ of the initial specified value
- # Leakage Current \leq The initial specified value

K. CLEANING CONDITIONS : Solvent-proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4



SamYoung Electronics Co., Ltd.