
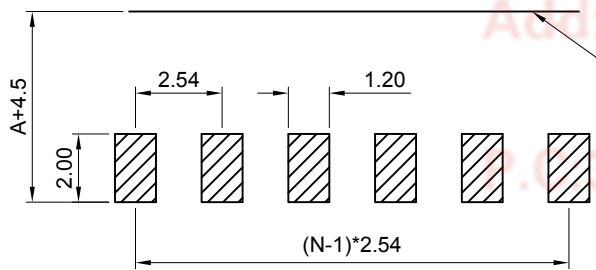
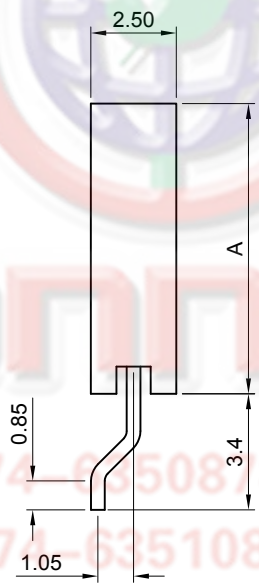
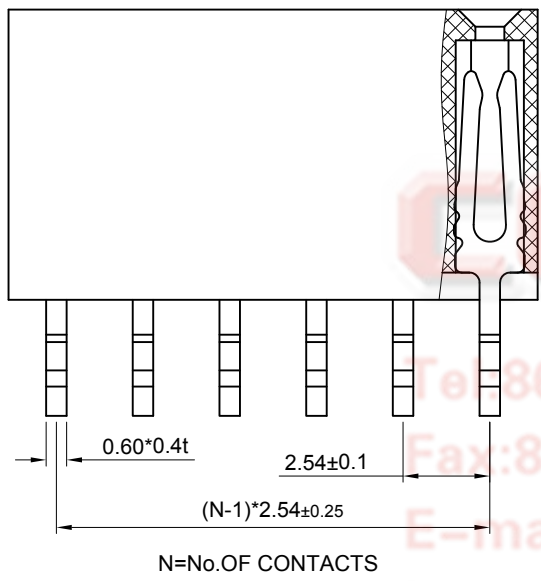


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNFLY is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/18/11'		LJC 10/18/11'
D	DRAWING UPDATE	JLZ 01/09/19'		

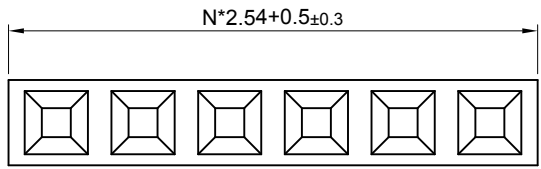

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating:3A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: High Temp,Black,UL94-V0.

Product Number Code:

DS1023-21 - X X X X X

- PACKING TYPE  
B:TUBE  
R:TAPE ON REEL
- PROFILE HEIGHT(DIM A)  
1: 8.5mm  
2: 5.0mm
- CONTACT PLATING  
8: FULL GOLD FLASH
- MOUNTING TYPE  
S: SMT
- No.OF CONTACTS  
1x2~1x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1023-21-XXXXX-D	

PROJECTION		TITLE	SINGLE ROW FEMALE HEADER PITCH
UNITS	mm		2.54mm SMT TYPE
SHEET SIZE	A4	SERIES	DS1023-21 SERIES

**晨翔电子有限公司**  
 CONNFLY CONNFLY ELECTRONIC CO. LTD