


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/07/14'	~	

N:NUMBER OF CONTACT/2

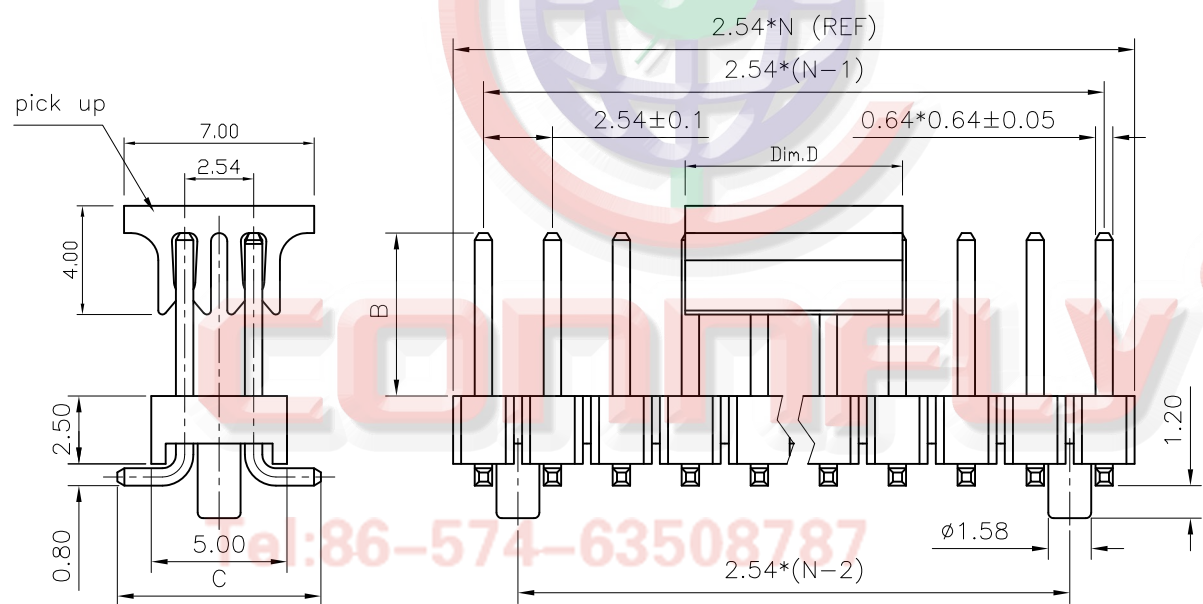

NOTES:

- SPECIFICATION
  - TEMPERATURE RANGE: -40°C~+105°C.
  - CONTACT RESISTANCE: 20mΩ max.
  - INSULATION RESISTANCE: 1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- PART NUMBER: DS1022-06
- PRODUCT NUMBER CODE:


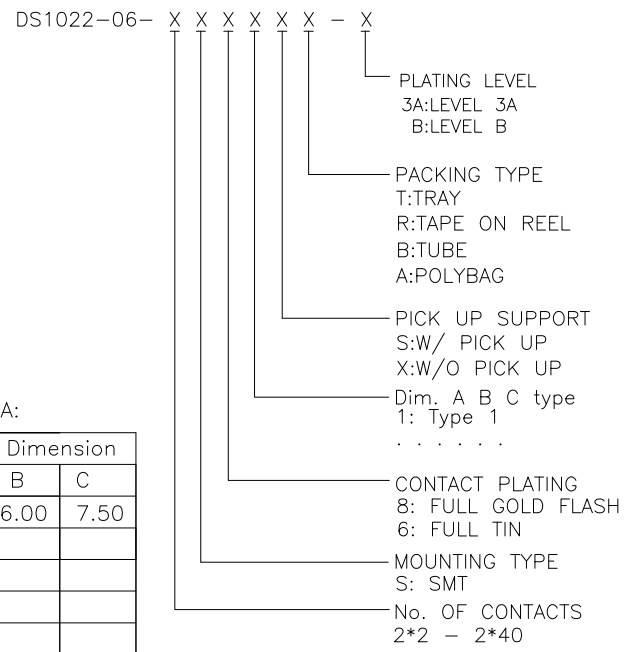


TABLE A:

TYPE	Dimension	
	B	C
1	6.00	7.50
2		
3		
4		
5		
6		
7		
8		

pos.	Dim.	Dim.D
2~8pin	5.0mm	
9~40pin	8.0mm	

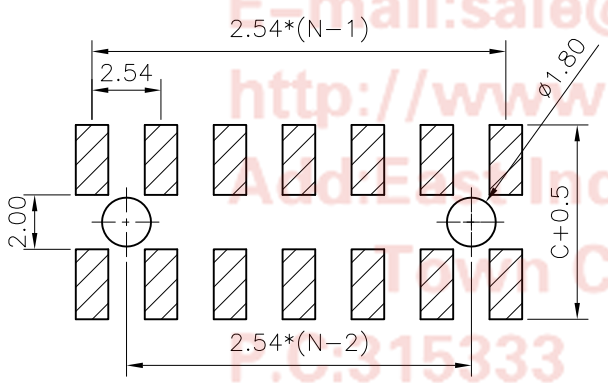

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1022-06-2*XXXXXX		

PROJECTION	TITLE	PIN HEADER PITCH 2.54mm	
		SMT TYPE W/ POST	
UNITS	mm	SERIES	DS1022-06 SERIES
SHEET SIZE	A4		

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**