


REV.	CHANGE CONTENT	BY	DATE
A.	初始设计，在HG12864130-CGD基础上去掉ICON	SZX	15.12.01

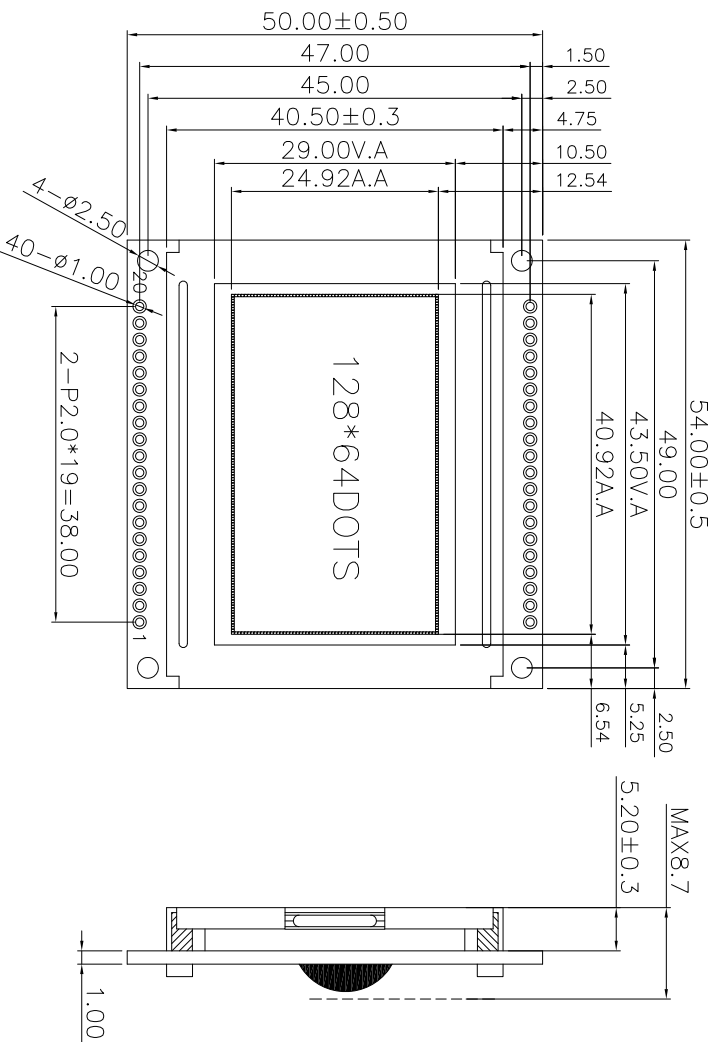

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	VSS	VDD	V0	D/I	R/W	E	DB0~DB7	CS1	CS2	/RST	VEE	BL+	BL-

NOTE:

DISPLAY TYPE : FSTN TRANSFLECTIVE-POSITIVE  
VIEWING DIRECTION: 6: 00  
OPERATING VOLT. : VOP=13V  
OPERATING TEMP. : -20℃ ~ +70℃  
STORAGE TEMP. : -30℃ ~ +80℃  
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V  
LED : WHITE VBL=5.0V,IBL: MAX 60mA ,TYP 45mA  
DRIVER IC : AIP31107+AIP31108\*2  
UNMRAKED TOLERANCES : ±0.3MM

COM 1	SEG 1
COM 64	SEG 128

北京海迅华田电子有限公司

DESIGN	SZX	15.12.01	DRAWING No. : HG12864C16C-FF62L-VA
CHECKED	HYQ	15.12.01	DRAWING TITLE: LCD MODULE
APPROVED	WYR	15.12.01	REV. : A
			SCALE : -
			PROJECTION:
			UNIT : MM
			SHEET : 1/1