
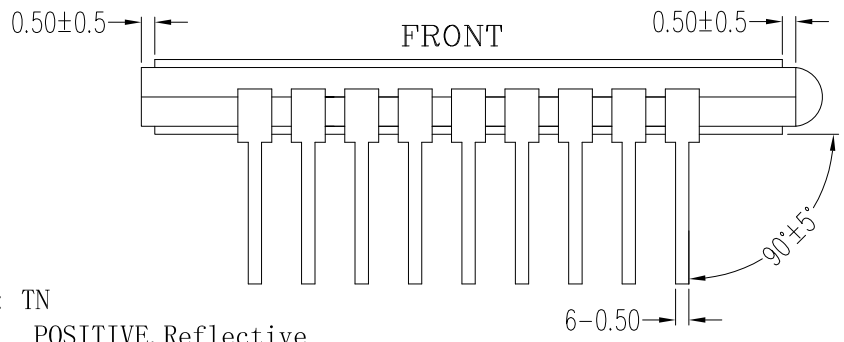
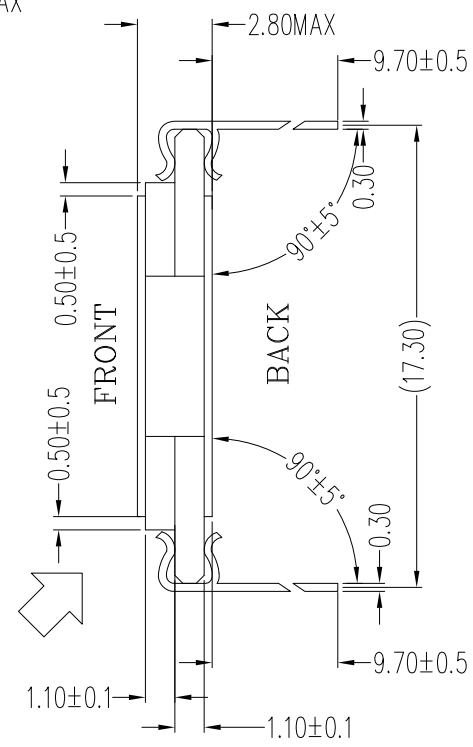



REV.	CHANGE CONTENT	BY	DATE
A	Adjust the graphic size and position according to customer's requirement	HY	2016.2.19
B	Adjust the Vop = 3 v, 1/2 duty, 18 pin, PITCH 2.0 mm instead	HY	2016.2.25

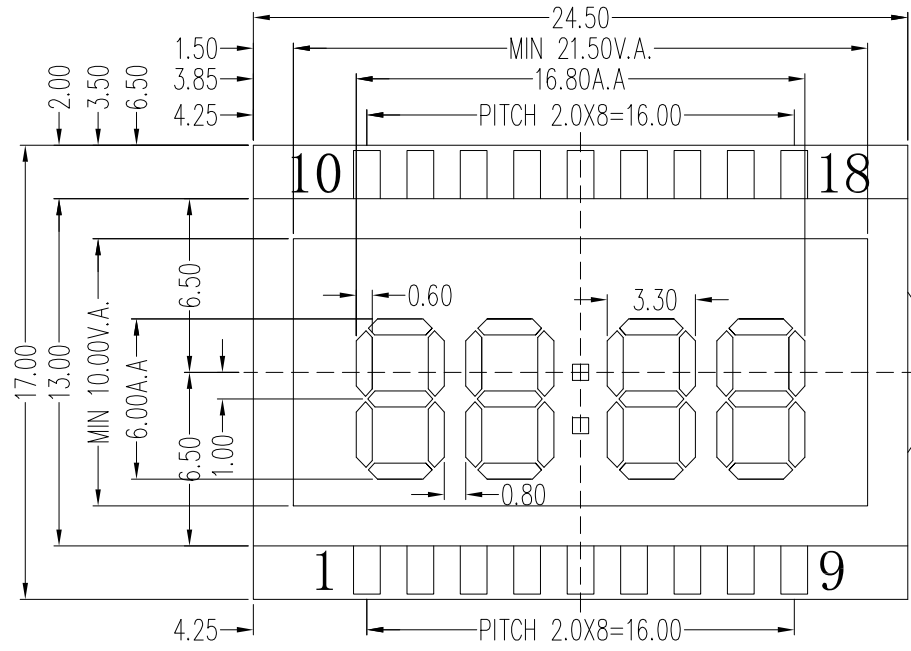


- NOTES 1:
- 1). DISPLAY TYPE : TN
 - 2). DISPLAY MODE : POSITIVE, Reflective
 - 3). VIEWING DIRECION : 6 O' CLOCK
 - 4). OPERATING TEMP : -20° C TO 70° C
STORAGE TEMP : -30° C TO 80° C
 - 5). DRIVER METHOD: 1/2 DUTY, 1/2 BAIS, VOP=3.0V
 - 6). UNMARK TOLERANCE IS : ±0.2mm
 - 7). ROHS.
 - 8). () MEANS: DIMENSION FOR REFERENCE

北京海迅华田电子有限公司			DRAWING No.: HS00B21-NR62N-VAA	
HTDISPLAY ELECTRONICS CO., LTD.			DRAWING TITLE : LCM	
			FILE NO. :	
DESIGN	HY	2016.2.24	REV. : B	SCALE : 1 : 1
CHECKED	HYQ	2016.2.24	PROJECTION:	UNIT : mm
APPROVED	WYR	2016.2.24	⊕	SHEET : 1/3

REV.	CHANGE CONTENT	BY	DATE

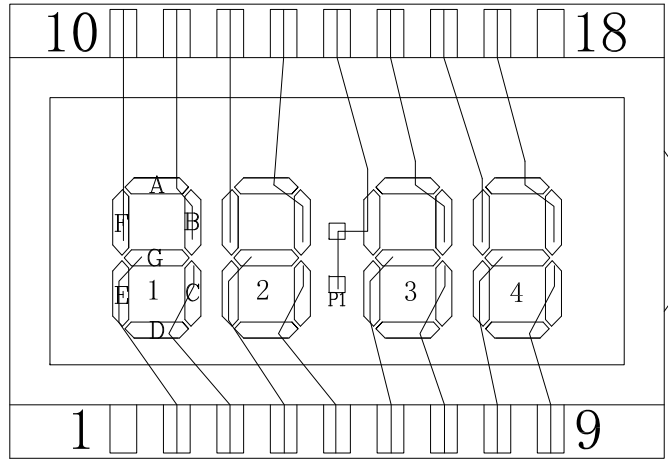

SEG

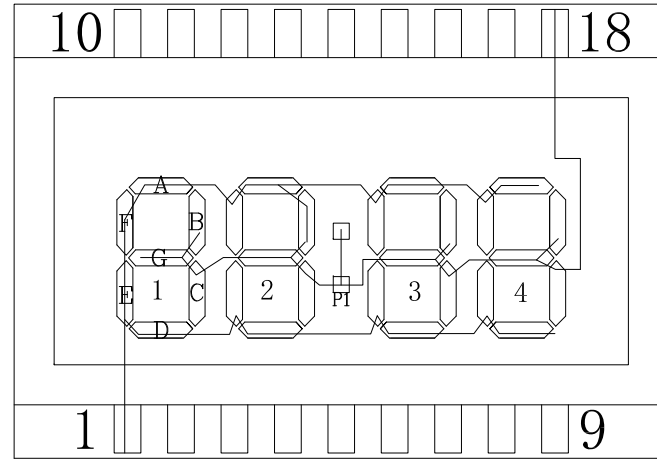

COM

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	COM1	1E	1D	2E	2D	3E	3D	4E	4D	1F	1A	2F	2A	3F	3A	4F	4A	
COM2		1G	1C	2G	2C	3G	3C	4G	4C		1B		2B	P1	3B		4B	COM2

北京海迅华田电子有限公司				DRAWING No.: HS00B21-NR62N-VAA	
HTDISPLAY ELECTRONICS CO., LTD.				DRAWING TITLE : LCM	
				FILE NO. :	
DESIGN	HY	2016.2.24	REV. : B	SCALE : 1 : 1	
CHECKED	HYQ	2016.2.24	PROJECTION:	UNIT : mm	
APPROVED	WYR	2016.2.24		SHEET : 2/3	

1 2 3 4 5 6 7 8

REV.	CHANGE CONTENT	BY	DATE

A

A

B

B

C

C

D


D

E

E

F

F

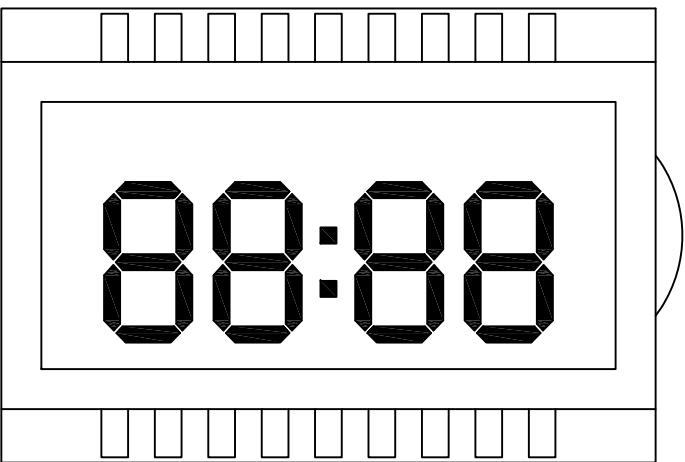

All show

北京海迅华田电子有限公司			DRAWING No.: HS00B21-NR62N-VAA	
HTDISPLAY ELECTRONICS CO., LTD.			DRAWING TITLE : LCM	
			FILE NO. :	
DESIGN	HY	2016.2.24	REV. : B	SCALE : 1 : 1
CHECKED	HYQ	2016.2.24	PROJECTION: 	UNIT : mm
APPROVED	WYR	2016.2.24		SHEET : 3/3

1 2 3 4 5 6 7 8