

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6992

BDS 63 VC 100 (M)

SERIES

BDS



RATING

63 V 100 μ F

CASE SIZE

\varnothing 10 x 10 L

A. DIAGRAM OF DIMENSIONS

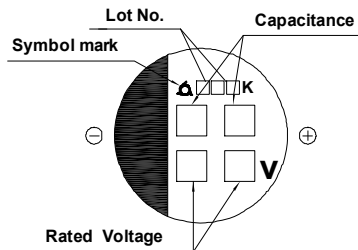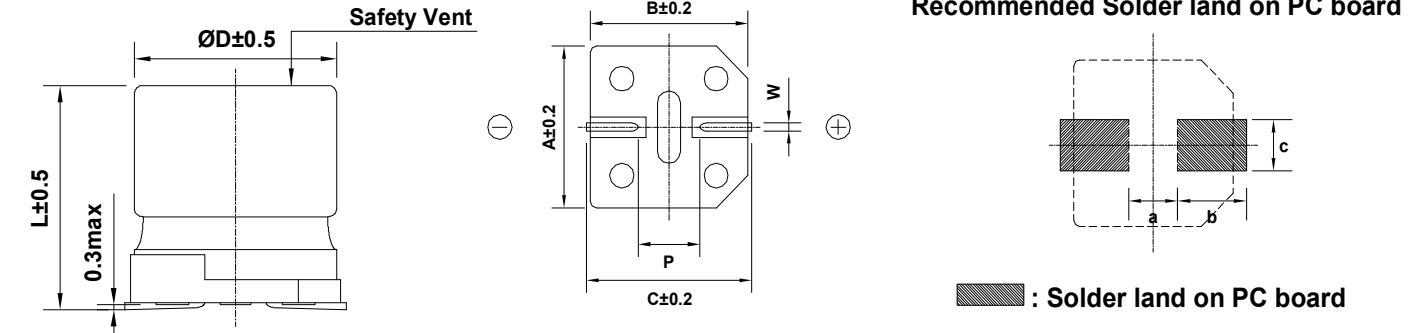

Case code	ØD	L	A	B	C	W	P	a	b	c
J10	10	10	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	2.2

B. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : **-40 ~ +105°C**
- B. RATED VOLTAGE : **63 V_{DC}**
- C. SURGE VOLTAGE : **79 V_{DC}**
- D. CAPACITANCE TOLERANCE : **±20%** at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower **63 μ A**, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TAN δ) : Lower **0.12** at 20°C, 120Hz
- G. MAX. RIPPLE CURRENT : **364 mArms** at 105°C, 120Hz
- H. TEMPERATURE CHARACTERISTIC :
 (Max.Impedance ratio) $Z(-25^\circ\text{C}) / Z(20^\circ\text{C}) = \underline{3}$
 $Z(-40^\circ\text{C}) / Z(20^\circ\text{C}) = \underline{4}$ (at 120Hz)
- I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for **2,000** hours at **105°C**.
 - # Capacitance change $\leq \underline{\pm 20\%}$ of the initial value
 - # Tan δ $\leq \underline{200\%}$ of the initial specified value
 - # Leakage Current \leq The initial specified value
- J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for **1,000** hours at **105°C** without voltage applied.
 The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.
 - # Capacitance change $\leq \underline{\pm 20\%}$ of the initial value
 - # Tan δ $\leq \underline{200\%}$ of the initial specified value
 - # Leakage Current \leq The initial specified value
- K. CLEANING CONDITIONS : Solvent proof
- L. OTHERS : Satisfied characteristics KS C IEC 60384-4

