

---

**SPECIFICATIONS SHEET FOR APPROVAL**

MAGNETIC BUZZER

P/N: MB9650B05NP

**DESCRIPTION: D9.6mm, H5mm Magnetic Buzzer, 2500Hz, 5V,  
80dB at 10cm****VERSION: 02****DATE: 10-Jan-13****REVISIONS**

<b>VERSION</b>	<b>DESCRIPTION</b>	<b>DATE</b>
01	Released from engineering	12-Nov-07
02	Update the drawing, added the washing label	10-Jan-13

**APPROVED BY :**

---

**CUSTOMER NAME :****DATE :**

## SPECIFICATIONS SHEET


MAGNETIC BUZZER  
P/N: MB9650B05NP

### 1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 10 CM	80	dB
RATED VOLTAGE	5	Vdc
OPERATING VOLTAGE	3 - 7	Vdc
RESONANCE FREQUENCY	2,500 ± 200	Hz
*MAX OPERATING CURRENT	25	mA
OPERATING TEMPERATURE	-20 to +80	°C
STORAGE TEMPERATURE	-30 to +85	°C
HOUSING	NORYL	-
WEIGHT	1	g

\*Value applying rated voltage

### 2. DIMENSIONS (unit in mm)

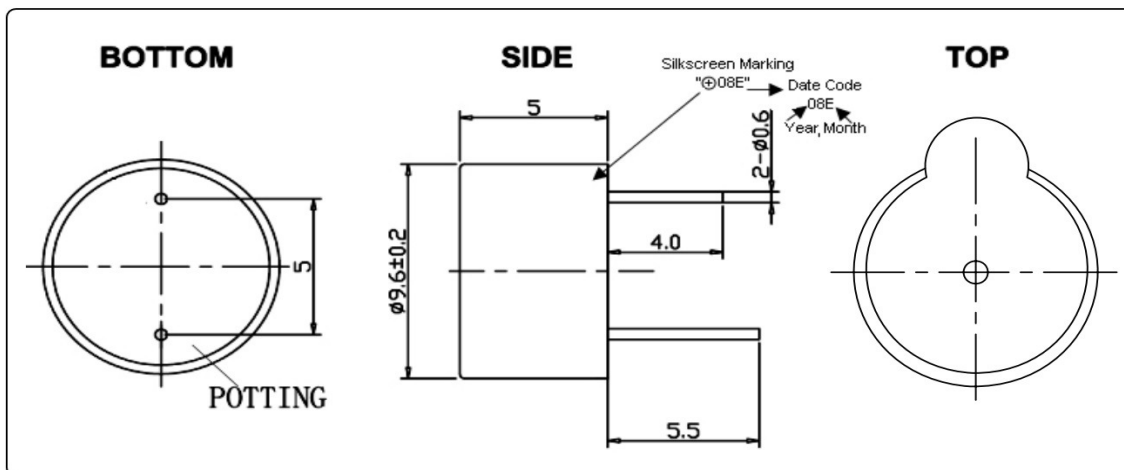

Tolerance:  $\pm 0.5$ mm except specified

VERSION: 02  
DATE: 10-Jan-13

All specifications subject to change without notice