

Stereo Jack Series



KLS1-TSJ3.5-003B (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Terminal 1 : Cold Rolled Steel
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 10: Brass
 Terminal 11: Brass
 Bushing : Brass
 Spring : Copper Alloy
 Housing : PBT
 Cover : PTB

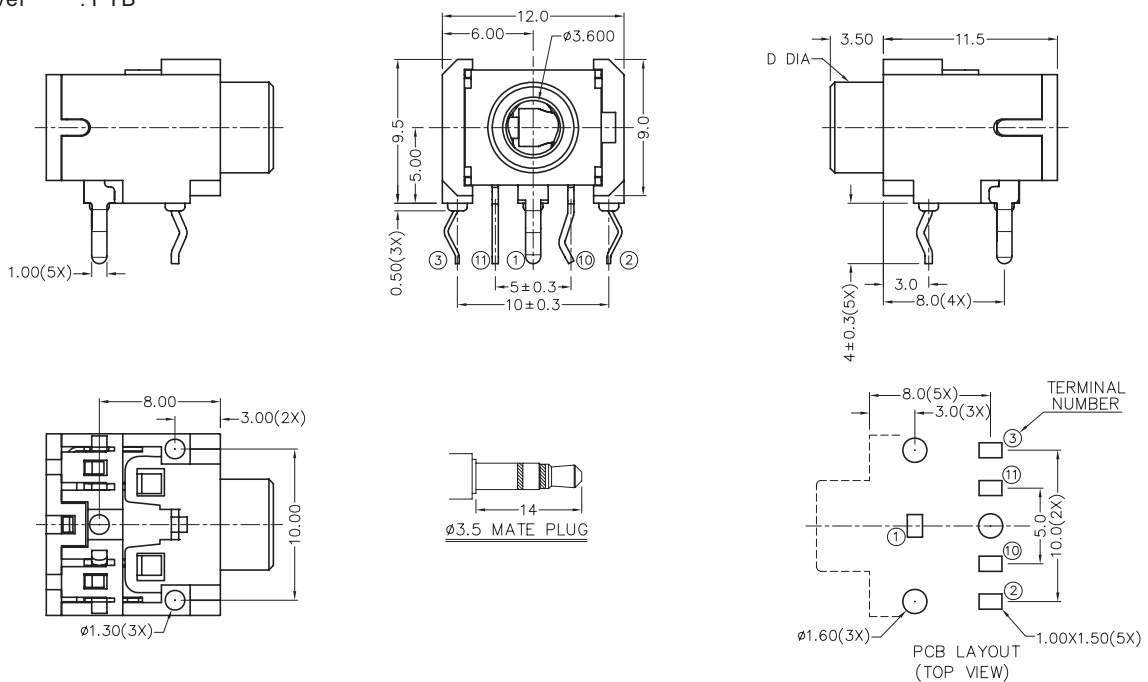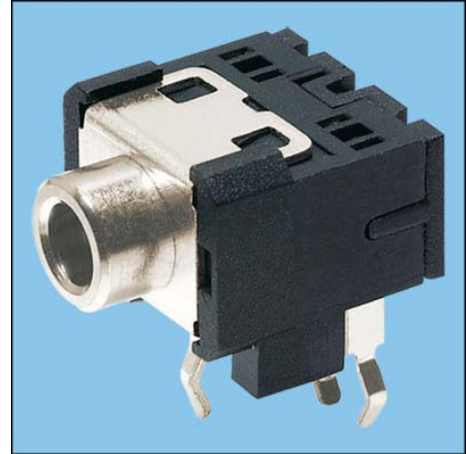

Without NUT	$\phi 6.0$	MODEL NO.	TSJ3.5-003B	TSJ3.5-003BA	TSJ3.5-003BB	TSJ3.5-003BC	TSJ3.5-003BD
D DIA		SCHEMATIC					

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-003BA

Pos. NO. ————
 3.5mm Dip Stereo Jack ————
 Schematic: See Annex
 A: With NUT
 B: Without NUT