
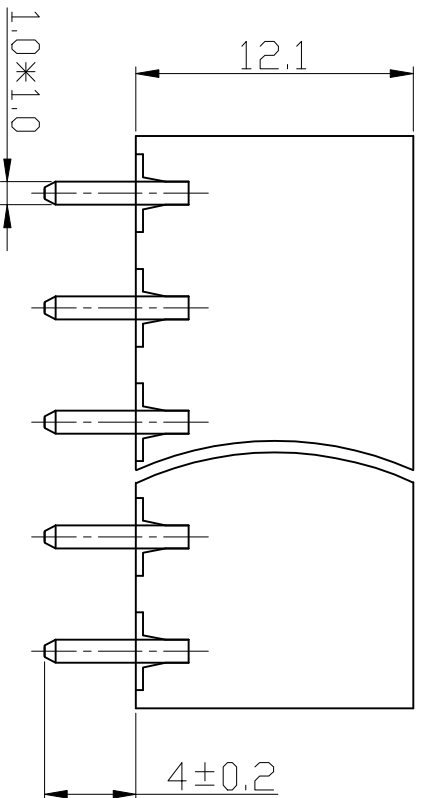
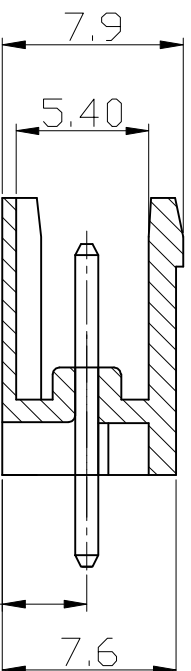


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

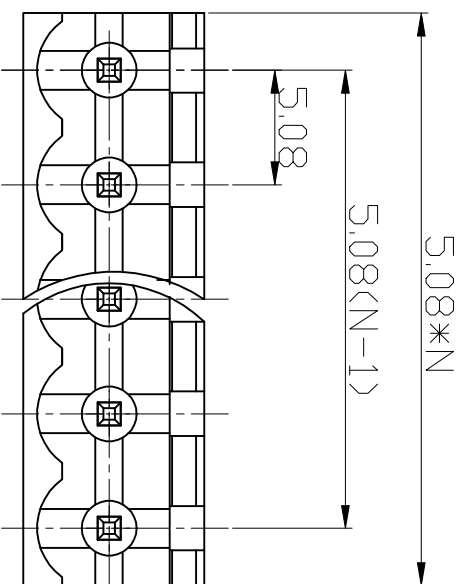

·MATERIAL
 PIN HEADER : BRASS, TIN PLATED
 HOUSING : PA66, UL94V-0

·ELECTRICAL
 RATED VOLTAGE : 300V
 RATED CURRENT : 15A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000MΩ/1000V
 WITHSTANDING VOLTAGE : AC1500V/1Min

·MECHANICAL
 TEMP. RANGE : -40℃~+105℃
 MAX SOLDERING : +250℃, FOR 5 SEC.

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.20	X, ±2°
X, ±0.15	X, ±1°
XX, ±0.10	XX, ±0.5°

DRAWING TYPE	SCALE	SHEET	1 OF 1
1:1	1:1	1	1

PROJECTION	TITLE	PLUGGABLE TERMINAL BLOCKS
UNITS: mm	PITCH: 5.08MM	
SHEET SIZE: A4	SERIES: KF2EDGV SERIES	

DF 慈溪市凯峰电子有限公司
 KAIFENG ELECTRONIC CO.,LTD