
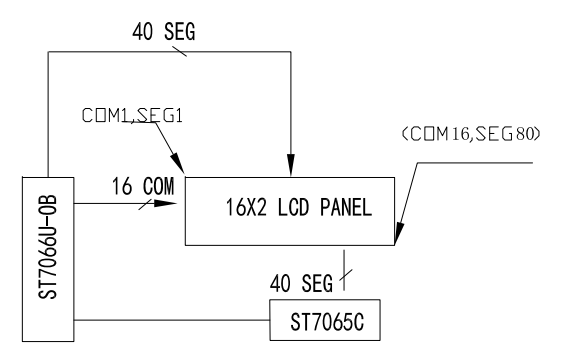
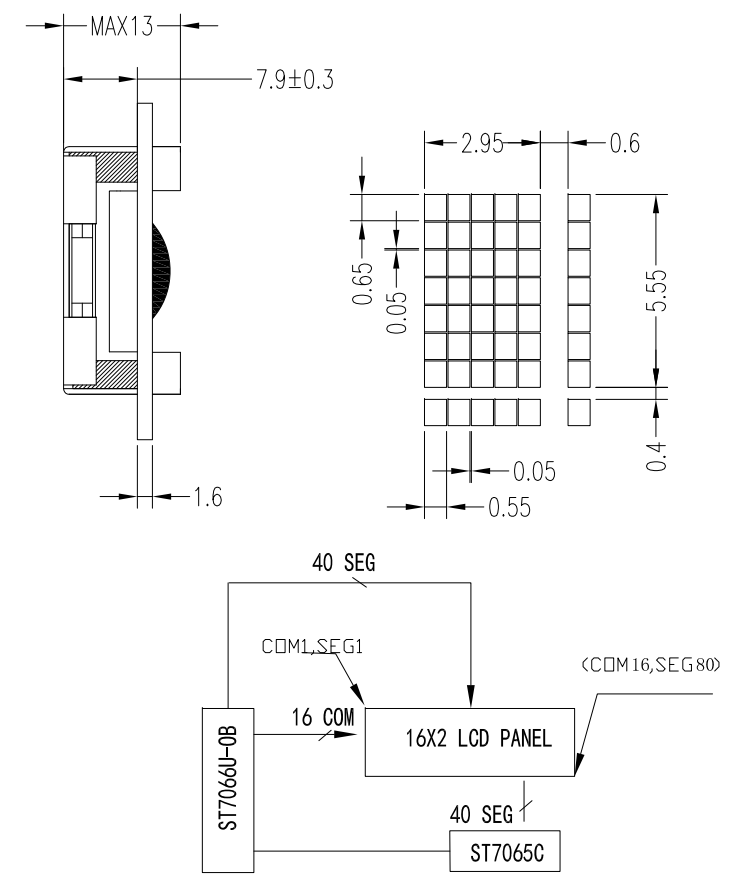


REV.	CHANGE CONTENT	BY	DATE

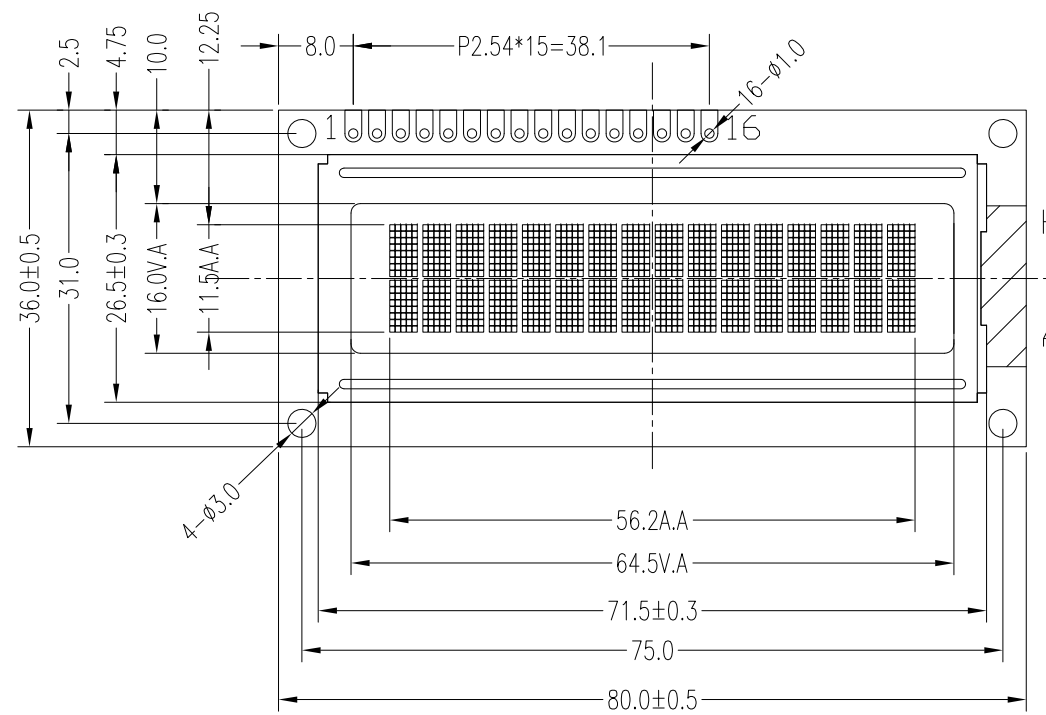

- NOTE:
1. DISPLAY TYPE: STN-BLUE-NEGATIVE
 2. DISPLAY MODE: TRANSMISSIVE
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.6V Vop, 5V VDD
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: -20°C~70°C
 6. ST. TEMP.: -30°C~80°C
 7. BACKLIGHT: COLOR-WHITE, 5.0±0.2V, IBL≤20mA
 8. DRIVER IC:ST7066U-OB,ST7065C
 9. UNMARKED TOLERANCE: ±0.3mm

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	GND	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+	LED-

北京华田信科电子有限公司

DESIGN		CCX	15.12.30	DRAWING No. : HC160204C-bT62L-VMB	
CHECKED			15.12.30	DRAWING TITLE: LCM DRAWING	
APPROVED			15.12.30	FILE NO. : 8	
			REV. : A	SCALE : -	
			PROJECTION:	UNIT : mm	
				SHEET : 1/1	