
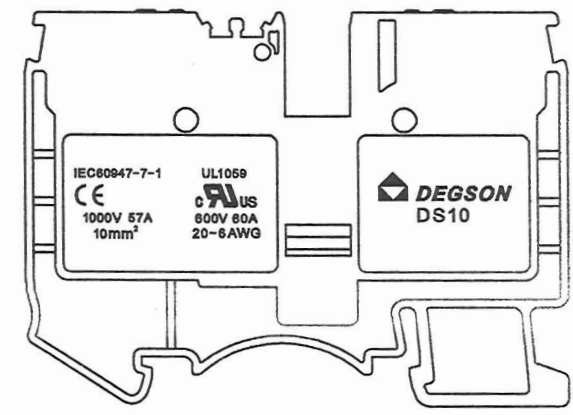


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

试量产专用  
 (仅限内部使用, 对外无效)

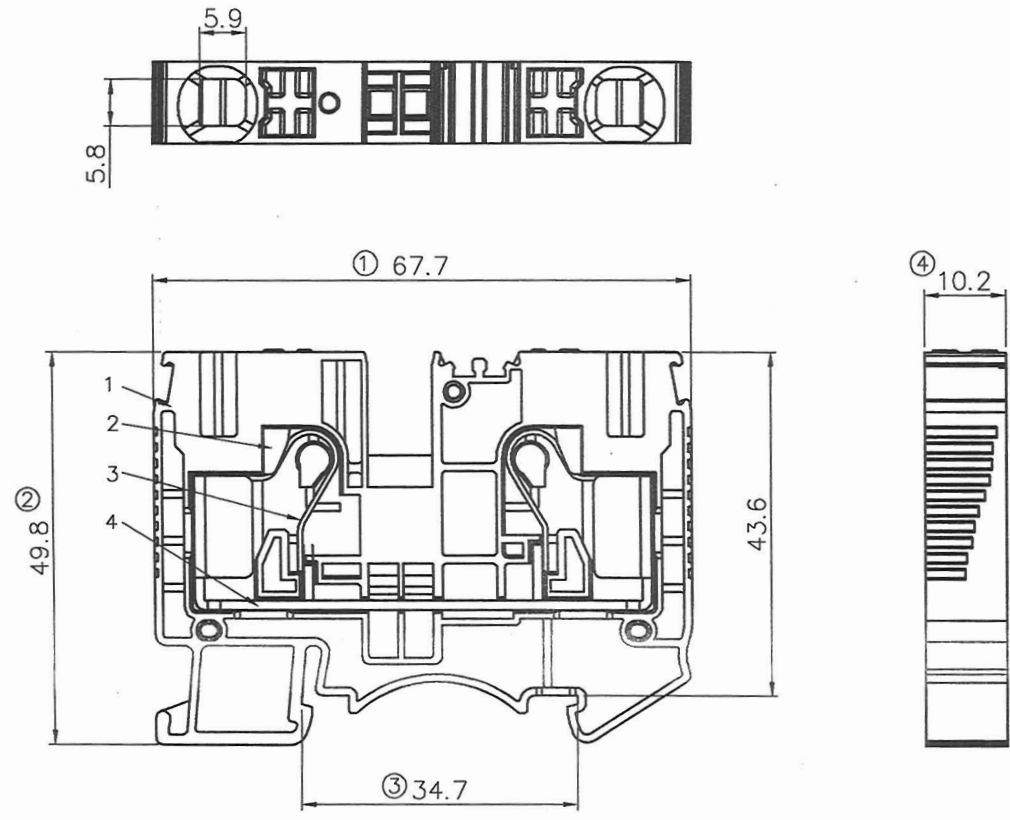

备注一:

- UL 标准
1. 额定电压与电流: 600V / 60A
  2. 工频耐压: AC2200V/1Min.
  3. 线径范围: 20~6AWG

IEC 标准

1. 污染等级	3
过压类别	III
额定脉冲电压(KV)	8.0KV
额定电压(V)	1000V
额定电流(A)	57A

2. 线径范围: 0.5~10mm<sup>2</sup>&16mm<sup>2</sup>(sol)

备注二:

1. 尺寸标注符合标准 ASME Y14.5-2009
2. P距: 10.2mm, P数范围: N=01P
3. 剥线长度: 16~18mm
4. 使用温度范围: -40°C~+105°C
5. "⊗" 为重点管控尺寸
6. 未注公差表:

P距方向公差(mm)		其他尺寸公差(mm)					- / ~ / □	
≤6	6 ~ 10 10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10	
±0.10	±0.15 ±0.25	±0.20 ±0.30	±0.30 ±0.50	±0.50 ±0.70	±1.00	±1'		

7. 须符合RoHS环保要求

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
4	DS10-00A载流体	6309B00010(H)	1	紫铜	镀锡
3	DS10-00A弹片	X000006630(H)	2	不锈钢	
2	DS10-00A按钮	6309DYY01A(H)	2	POM	UL94V-2
1	DS10-00A塑件	6309AYY01A(H)	1	PA66	UL94V-C

DETACHED LISTS	PART NO.: /		宁波高松电子有限公司 <b>DEGSON</b> ® NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alan 09/08/16"		NAME: DS10-01P-1Y-00A(H)		
	CHKD: Baron 2016.9.8		TITLE: ASSEMBLY DRAWING		
	DRFT: ding 04/14/16"		DRAWING NO.: DS10-E01		REV TO-1
	 THIRD ANGLE PROJECTION		DRAWING NO.: DS10-E01 DO NOT SCALE DRAWING		SHEET 1/1 SCALE 1:1

