


DIP Switch Series

KLS7-KLR End-stackable SMT Type DIP Switch




Specifications

- Contact Rating: 25 mA at 24VDC (switching)
100 mA at 50VDC (steady state)
- Life: 1,000 cycles
- Contact Resistance: 100mΩ Max.
- Insulation Resistance: 100MΩ at 100VDC Min
- Dielectric Strength: 300VAC Min
- Storage Temperature: -40°C ~ 85°C
- Operating Temperature: -25°C ~ 70°C.
- Operation Force : 8N Max.

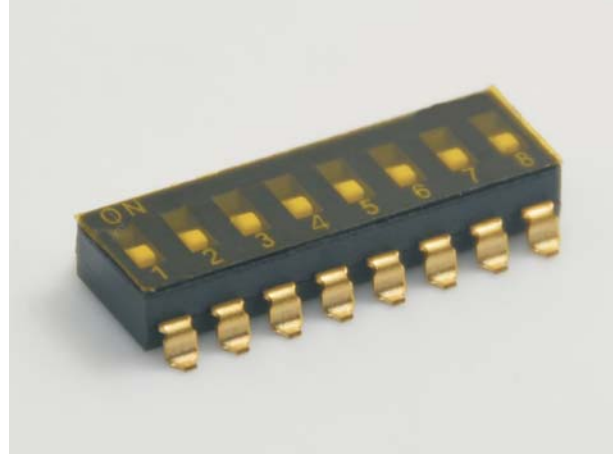

Materials

- Base & Cover: PPS (UL94V-0)
- Actuator: PA46 (UL94V-0).
- Contacts: Brass, Gold / Tin Plate
- Terminals: Brass, Gold / Tin Plate
- Mylar: 0.05mm UL94V-0 Mylar

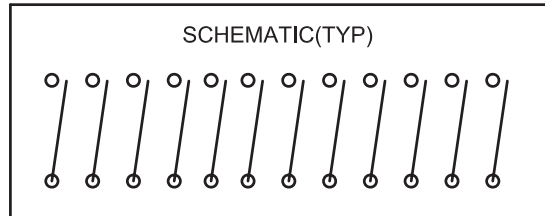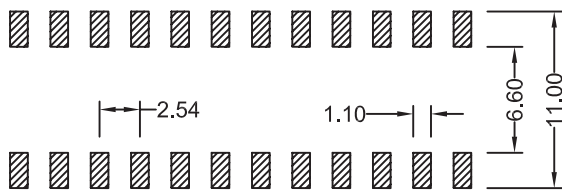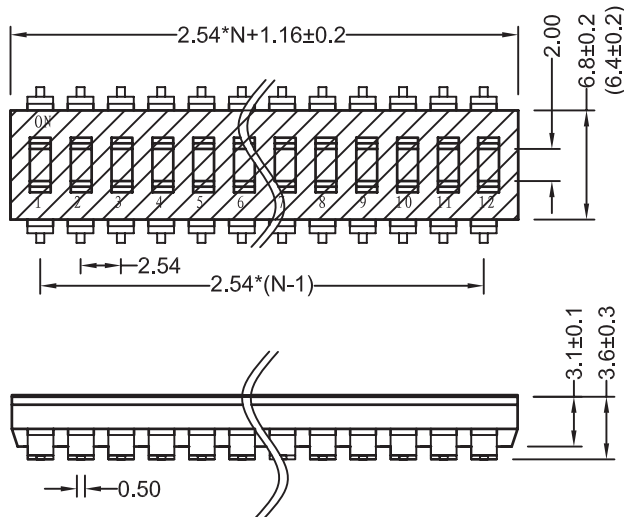

P.C.B. LAYOUT

ORDER INFORMATION

KLS7-KL - XX - N - 0 0

- Part Number
- KLR: Recessed Type Dip Switch
- Number of Pos.: 02~12 Pos.
- Packaging: 0=Tube 1=Tape
- 1: With sealed
- Color: N=Black