


FILTER CHOKE / SRC TYPE

FEATURES


- ◆ Low distortion.
- ◆ The magnetic shield in a metal case is aviable.

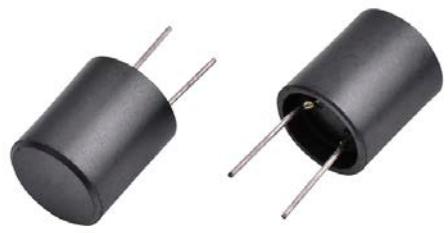


APPLICATIONS

- ◆ Magnetically shielded construction.
- ◆ Ideally Used in Printers, LCD TV, DVD, Printer, Copy Machine, Main board of the compounding machines, etc as Power Supplies's Inductors or DC-DC Converter inductors.

ORDERING CODE

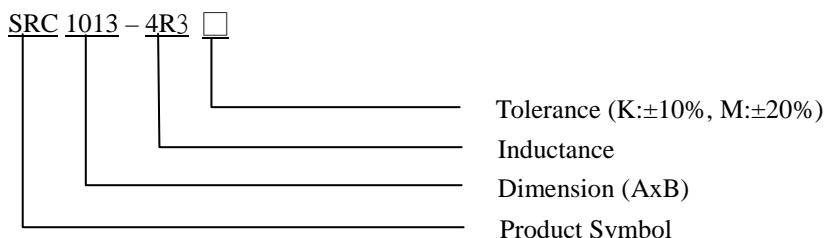

SHAPES

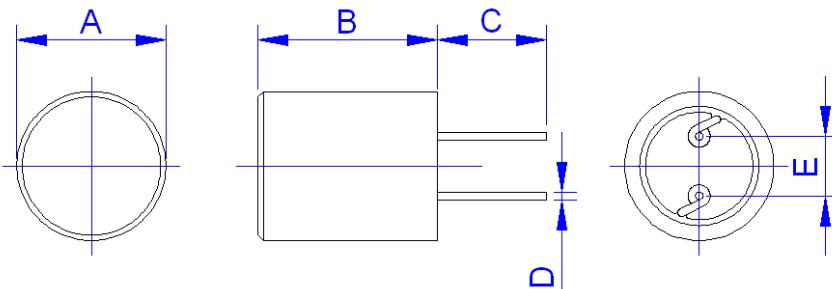

DIMENSIONS UNIT: mm (inch)

| Part No. | A (MAX) | B | C (REF) | D | E (REF) |
|----------------|---------|------|---------|---------------|---------|
| SRC1013 | 11.0 | 13.5 | 5.0 | 0.7 ± 0.1 | 5.0 |
| SRC1317 | 13.5 | 17.5 | 4.5 | 0.7 ± 0.1 | 5.0 |
| SRC1616 | 16.0 | 16.5 | 5.0 | 0.8 ± 0.1 | 7.5 |
| SRC1619 | 16.0 | 19.2 | 5.0 | 1.0 ± 0.1 | 7.5 |



CORE MASTER ENTERPRISE CO., LTD.
<http://www.coremaster.com.tw>

FILTER CHOKE / SRC TYPE

ELECTRICAL CHARACTERISTICS FOR SRC1013

| Part No. | Inductance (uH) | DC Resistance (Ω) Max | Rated Current (A) Max |
|---------------------|--------------------|--------------------------|--------------------------|
| SRC1013-4R3M | 4.3 ± 20% | 0.021 | 4.60 |
| SRC1013-6R8M | 6.8 ± 20% | 0.024 | 3.60 |
| SRC1013-100M | 10 ± 20% | 0.030 | 3.46 |
| SRC1013-150M | 15 ± 20% | 0.038 | 2.57 |
| SRC1013-220M | 22 ± 20% | 0.045 | 2.21 |
| SRC1013-330M | 33 ± 20% | 0.057 | 1.83 |
| SRC1013-470M | 47 ± 20% | 0.090 | 1.60 |
| SRC1013-680M | 68 ± 20% | 0.150 | 1.36 |
| SRC1013-101M | 100 ± 20% | 0.210 | 1.10 |
| SRC1013-151M | 150 ± 20% | 0.242 | 0.86 |
| SRC1013-221M | 220 ± 20% | 0.360 | 0.74 |
| SRC1013-331M | 330 ± 20% | 0.430 | 0.57 |
| SRC1013-471M | 470 ± 20% | 0.810 | 0.48 |
| SRC1013-681M | 680 ± 20% | 0.952 | 0.38 |
| SRC1013-102M | 1000 ± 20% | 1.600 | 0.39 |

ELECTRICAL CHARACTERISTICS FOR SRC1317

| Part No. | Inductance (uH) | DC Resistance (Ω) Max | Rated Current (A) Max |
|---------------------|--------------------|--------------------------|--------------------------|
| SRC1317-330M | 33 ± 20% | 0.058 | 4.80 |
| SRC1317-470M | 47 ± 20% | 0.069 | 4.30 |
| SRC1317-680M | 68 ± 20% | 0.101 | 3.30 |
| SRC1317-820M | 82 ± 20% | 0.110 | 3.10 |
| SRC1317-101M | 100 ± 20% | 0.125 | 2.80 |
| SRC1317-151L | 150 ± 15% | 0.195 | 2.40 |
| SRC1317-221L | 220 ± 15% | 0.278 | 1.90 |
| SRC1317-331L | 330 ± 15% | 0.360 | 1.60 |
| SRC1317-471L | 470 ± 15% | 0.530 | 1.35 |
| SRC1317-681L | 680 ± 15% | 0.780 | 1.12 |
| SRC1317-821L | 820 ± 15% | 0.950 | 1.02 |
| SRC1317-102L | 1000 ± 15% | 1.180 | 0.90 |
| SRC1317-152L | 1500 ± 15% | 1.400 | 0.72 |
| SRC1317-222L | 2200 ± 15% | 2.280 | 0.62 |
| SRC1317-332L | 3300 ± 15% | 3.310 | 0.51 |
| SRC1317-472L | 4700 ± 15% | 5.020 | 0.43 |



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

FILTER CHOKE / SRC TYPE

ELECTRICAL CHARACTERISTICS FOR SRC1616

| Part No. | Inductance (uH) | DC Resistance (Ω) Max | Rated Current (A) Max |
|--------------|--------------------|--------------------------|--------------------------|
| SRC1616-4R7M | 4.7 ± 20% | 0.0670 | 12.6 |
| SRC1616-6R8M | 6.8 ± 20% | 0.0935 | 9.8 |
| SRC1616-100M | 10 ± 20% | 0.0105 | 9.3 |
| SRC1616-150M | 15 ± 20% | 0.0145 | 7.1 |
| SRC1616-220M | 22 ± 20% | 0.0170 | 6.2 |
| SRC1616-330M | 33 ± 20% | 0.0270 | 5.0 |
| SRC1616-470M | 47 ± 20% | 0.0370 | 4.2 |
| SRC1616-680M | 68 ± 20% | 0.0560 | 3.3 |
| SRC1616-820M | 82 ± 20% | 0.0645 | 2.9 |
| SRC1616-101K | 100 ± 10% | 0.0680 | 2.7 |
| SRC1616-151K | 150 ± 10% | 0.0910 | 2.3 |
| SRC1616-221K | 220 ± 10% | 0.1550 | 1.8 |
| SRC1616-331K | 330 ± 10% | 0.2400 | 1.5 |
| SRC1616-471K | 470 ± 10% | 0.2800 | 1.2 |
| SRC1616-681K | 680 ± 10% | 0.5150 | 1.0 |
| SRC1616-821K | 820 ± 10% | 0.5750 | 0.96 |
| SRC1616-102K | 1000 ± 10% | 0.6650 | 0.85 |

ELECTRICAL CHARACTERISTICS FOR SRC1619

| Part No. | Inductance (uH) | DC Resistance (Ω) Max | Rated Current (A) Max |
|--------------|--------------------|--------------------------|--------------------------|
| SRC1619-100M | 10 ± 20% | 0.020 | 7.0 |
| SRC1619-150M | 15 ± 20% | 0.022 | 6.0 |
| SRC1619-180M | 18 ± 20% | 0.025 | 5.2 |
| SRC1619-220K | 22 ± 10% | 0.028 | 4.9 |
| SRC1619-330K | 33 ± 10% | 0.033 | 3.9 |
| SRC1619-470K | 47 ± 10% | 0.038 | 3.4 |
| SRC1619-680K | 68 ± 10% | 0.046 | 2.90 |
| SRC1619-101K | 100 ± 10% | 0.053 | 2.50 |
| SRC1619-151K | 150 ± 10% | 0.077 | 2.00 |
| SRC1619-221K | 220 ± 10% | 0.140 | 1.60 |
| SRC1619-331K | 330 ± 10% | 0.270 | 1.30 |
| SRC1619-471K | 470 ± 10% | 0.460 | 1.10 |
| SRC1619-681K | 680 ± 10% | 0.560 | 0.90 |
| SRC1619-102K | 1000 ± 10% | 0.690 | 0.75 |

Notes:

- 1) Open Circuit Inductance Test Parameters: 1.0kHz, 0.25Vrms, 0.0Adc, Test Equipment : HP4284A or WK3260B LCR Meter.
- 2) DCR limits @ 20°C. Test Equipment: CH502BC.



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>