

Stereo Jack Series





KLS1-TSJ3.5-013 (Dip Stereo Jack)

Technical parameters:



- Rated voltage: DC 30 V
- Rated current: 0.5 A
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 N
- Life: 50000 times
- Operating Temperature:-30°C ~ 70°C

Material:

- Terminal 1 : Copper Alloy
- Terminal 2 : Copper Alloy
- Terminal 3 : Copper Alloy
- Housing : Pa66

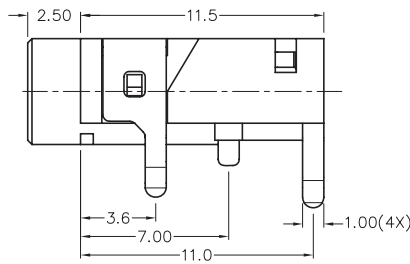

MODEL NO.	TSJ3.5-013
SCHEMATIC	

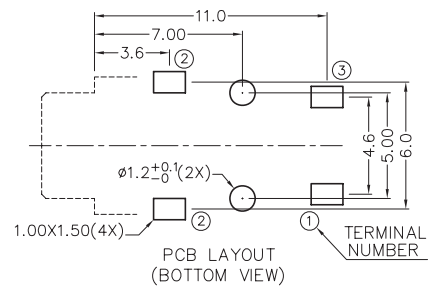

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-013

