

Stereo Jack Series



KLS1-TSJ3.5-005A (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Housing-A/B /Insulator/Pin Board :PBT
 Contact Clip :C5210R-EH AG CLAD
 Center Pin Material:
 Terminal 1,2,3 :Copper Alloy
 Terminal 4,5,6,7,8,9 :Brass
 Terminal 10,11,Bushing :Brass
 Spring :Stainless Steel

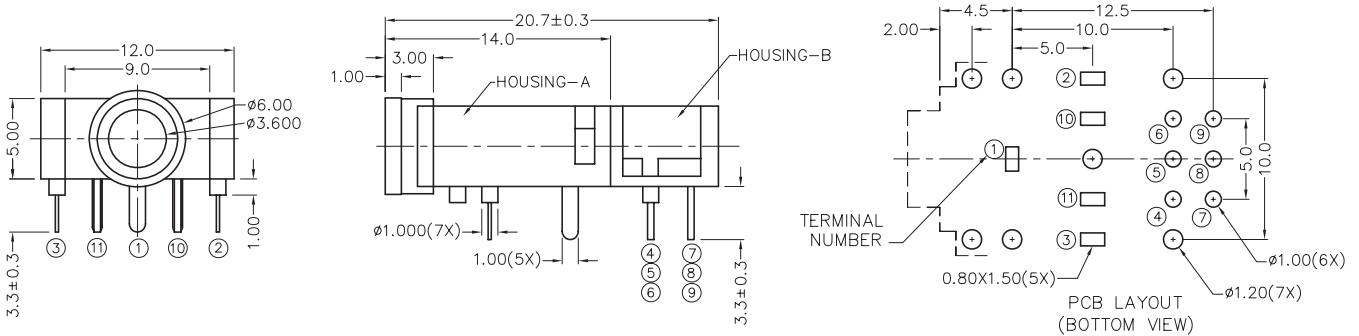

MODEL NO.	TSJ3.5-005A	TSJ3.5-005AA	TSJ3.5-005AB	TSJ3.5-005AC	TSJ3.5-005AD	TSJ3.5-005AE
SCHEMATIC						

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-005AA

