



P.C.B
LAYOUT
VIEW

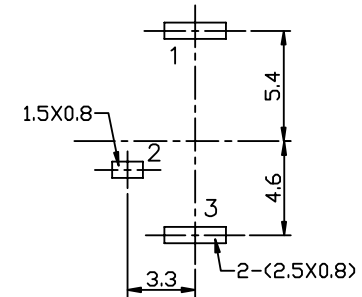

SCHEMATIC



SPECIFICATION
 1.Rating : DC 30V 0.5A;
 2.Contact resistance: $\leq 0.03\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-25N;
 6.life test: 5,000 cycles.

5	HOUSING	1	ABS	
4	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
3	SPRING PIECE	1	65Mn STEEL	Sn-Sb-Plating
2	CURVE PIECE	1	H62 BRASS	Cu-Sn-Plating
1	FLAT PIECE	1	H62 BRASS	Cu-Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1	
	PHONE JACK	L-KLS1-TSJ3.5-022	A4	TOLERANCE	ANGLES SCALE VER
			± 0.15	$\pm 1.5^\circ$	3:1 1

DESIGNER		KLS ELECTRONIC CO., LTD
BY: CHECK		
BY: APPROVED		